



## South Coast AQMD Site Survey Report for Los Angeles (Main St.)

Last updated: May 7, 2020

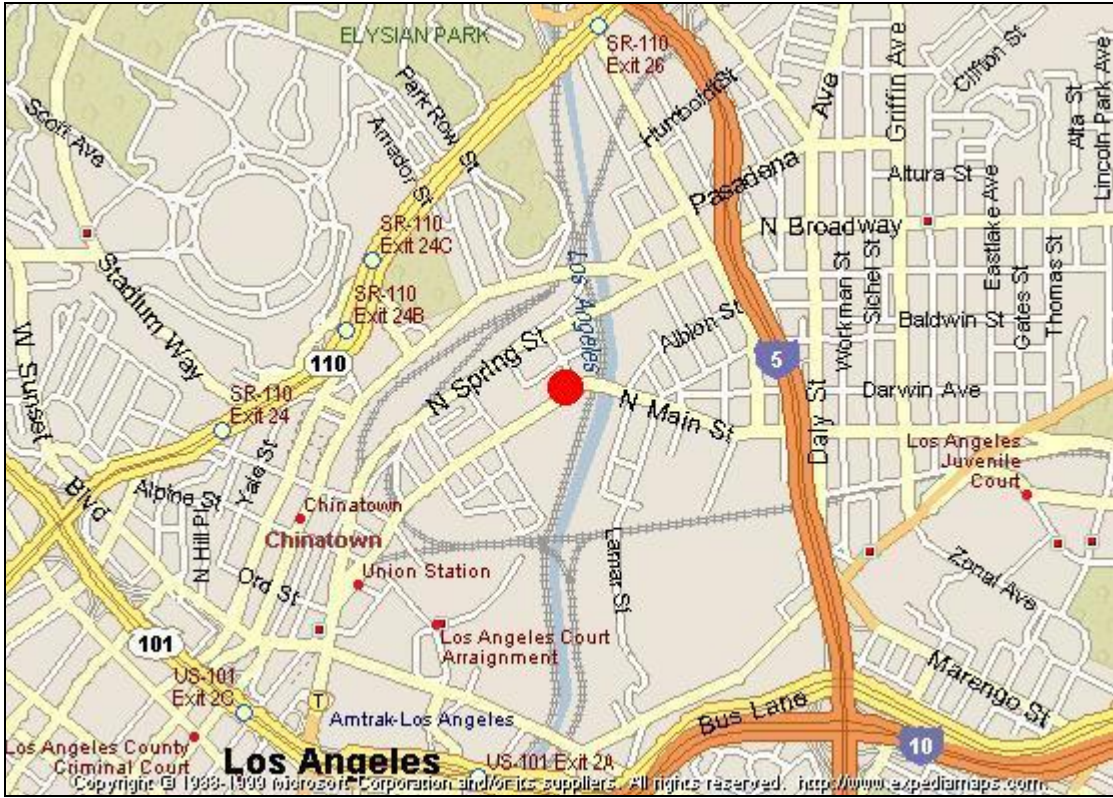

AQS ID	ARB Number	Site Start Date	Reporting Agency and Agency Code
060371103	70087	09/1979	South Coast AQMD (0972)

Site Address	County	Air Basin	Latitude	Longitude	Elevation
1630 North Main Street Los Angeles, CA 90012	Los Angeles	South Coast	34° 03' 59"N	118° 13' 36"W	89

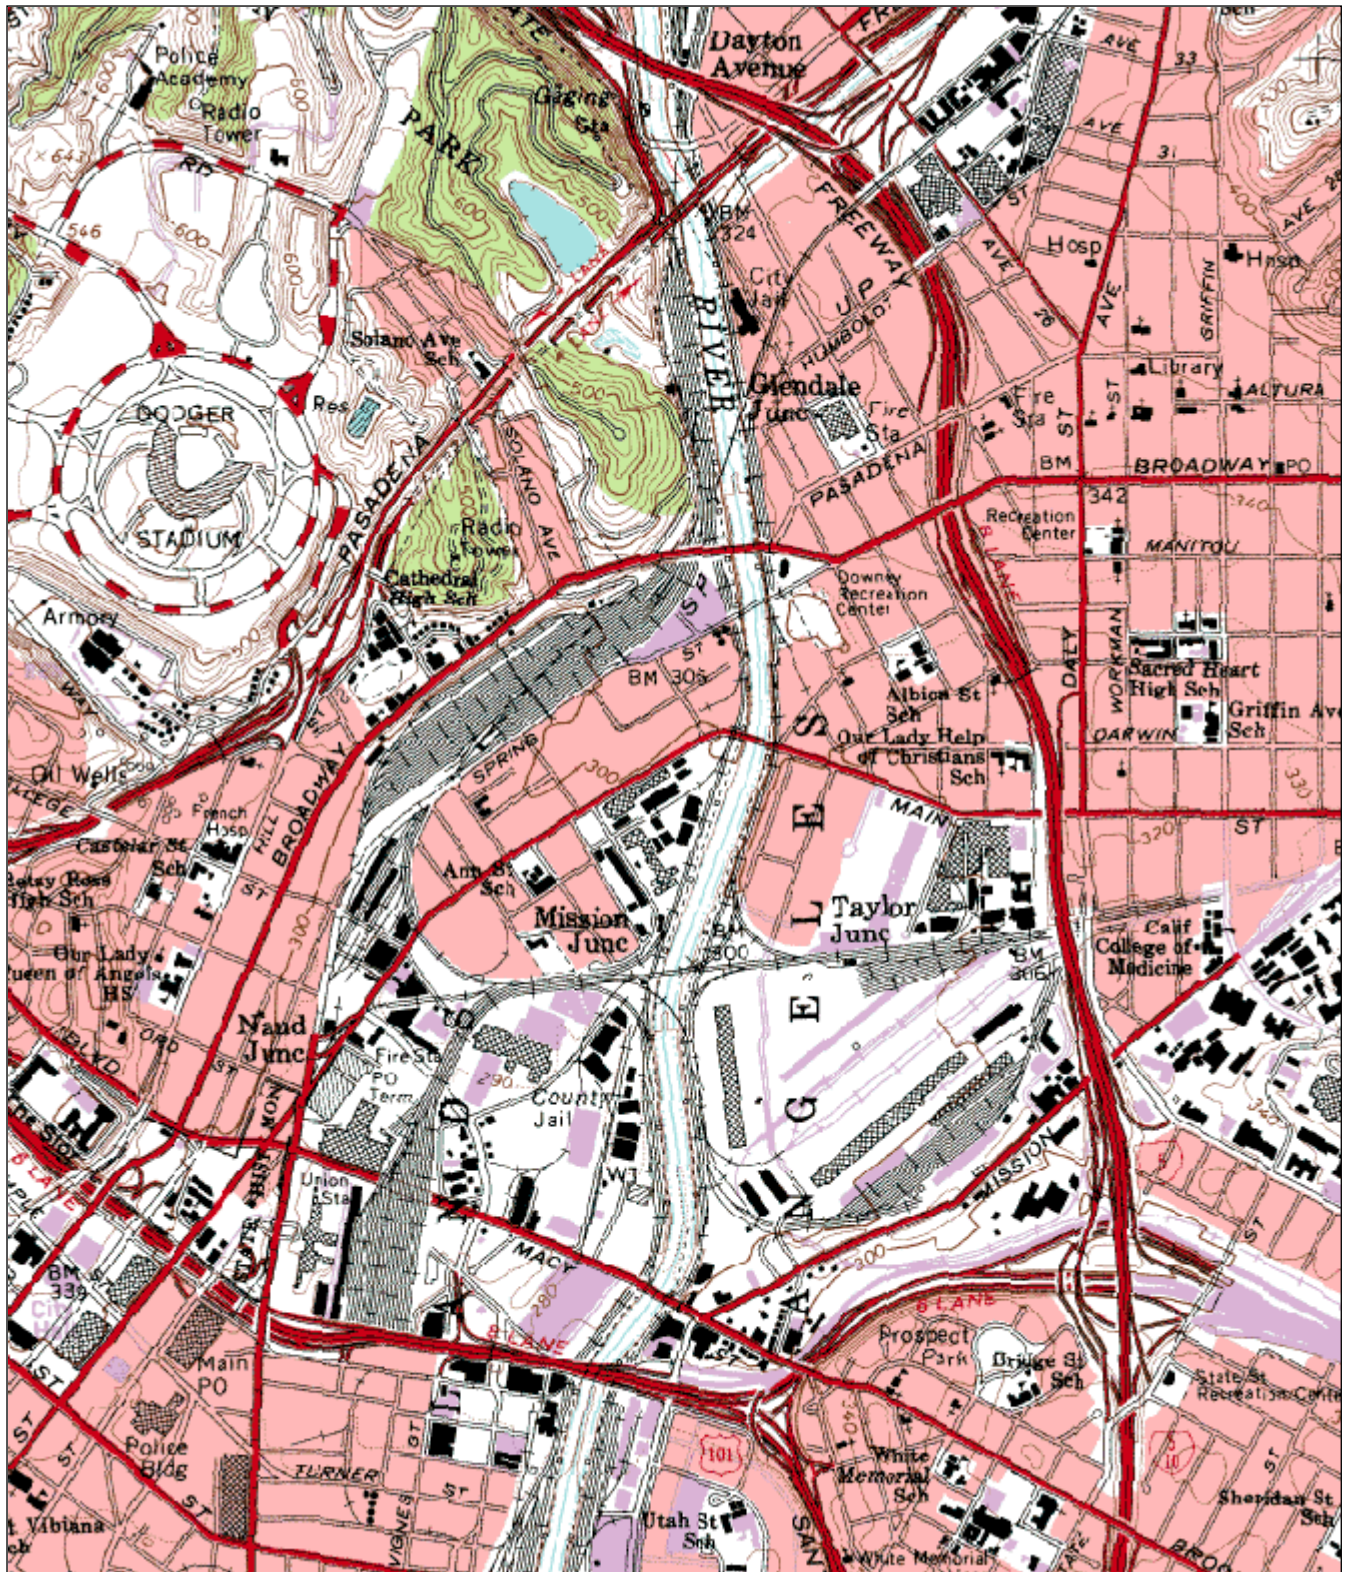

## Detailed Site Information

Local site name		Los Angeles (Main St.)		
AQS ID		060371103		
GPS coordinates (decimal degrees)		Latitude: 34° 03' 59" Longitude: 118° 13' 36"		
Street Address		1630 North Main Street, Los Angeles, CA 90012		
County		Los Angeles		
Distance to roadways (meters)		51 - 71		
Traffic count (AADT, year)		15,276 / 2012		
Groundcover (e.g. asphalt, dirt, sand)		Asphalt		
Representative statistical area name (i.e. MSA, CBSA, other)		31080-Los Angeles, Long Beach-Anaheim MSA		
Pollutant, POC	Carbon Monoxide, 1	Nitrogen Dioxide, 1	Ozone, 1	Sulfur Dioxide, 9
Primary / QA Collocated / Other	N/A	N/A	N/A	N/A
Parameter code	42101	42602	44201	42401
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Population Exposure	Highest Concentration	Population Exposure	Population Exposure
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	PAMS\NCore	PAMS\NCore	PAMS\NCore	PAMS\NCore
Instrument manufacturer and model	Horiba 370	Thermo 42i	API/Teledyne 400E	Thermo 43i-TLE
Method code	158	074	087	560
FRM/FEM/ARM/ other	FRM	FRM	FEM	FEM
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	N/A	N/A	N/A	N/A
Reporting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring start date (MM/DD/YYYY)	09/1979	09/1979	09/1979	09/1979
Current sampling frequency (e.g.1:3, continuous)	1:1	1:1	1:1	1:1
Calculated sampling frequency (e.g. 1:3/1:1)	N/A	N/A	N/A	N/A
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	12.3	12.3	12.3	12.3
Distance from supporting structure (meters)	2.0	2.0	2.0	2.0
Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A

Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	45	45	45	45
Distance between collocated monitors (meters)	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees)	360°	360°	360°	360°
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	Teflon	Teflon	Teflon	Teflon
Residence time for reactive gases (seconds)	6.5	12.9	7.2	15.6 (NCORE Manifold)
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	Nightly	Nightly	Nightly	Nightly
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	12/14/2019	12/14/2019	12/14/2019	12/24/2019
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A

Pollutant, POC	PM10, 2	PM10, 4	Lead, 3	Lead, 2
Primary / QA Collocated / Other	Primary	QA Collocated	QA Collocated	Primary
Parameter code	81102	81102	14129	14129

Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Population Exposure	Population Exposure	Population Exposure	Population Exposure
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	NATTS/NCore	NATTS/NCore	N/A	N/A
Instrument manufacturer and model	Tisch + SSI, A Sampler	Hi-Q 4300 SSI, B Sampler	TSP, B Sampler, Tisch +	TSP, A Sampler, Tisch +
Method code	141	141	110	110
FRM/FEM/ARM/other	FRM	FRM	FRM	FRM
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Reporting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring start date (MM/DD/YYYY)	01/1985	01/2007	09/1979	09/1979
Current sampling frequency (e.g. 1:3, continuous)	1:6	6 per Year	1:6	1:6
Calculated sampling frequency (e.g. 1:3/1:1)	1:6	6 per Year	1:12	1:6
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	11.7	11.7	11.3	11.3
Distance from supporting structure (meters)	2.0	2.0	2.0	2.0
Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	27	27	27	27
Distance between collocated monitors (meters)	2	2	2	2
Unrestricted airflow (degrees)	360°	360°	360°	360°
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A	N/A

Residence time for reactive gases (seconds)	N/A	N/A	N/A	N/A
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers	Monthly	Monthly	Monthly	Monthly
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	06/04/2019, 10/29/2019	05/14/2019, 10/29/2019	05/14/2019, 10/17/2019	05/14/2019, 10/17/2019

Pollutant, POC	Continuous PM10, PM Coarse, 9	Continuous PM2.5, PM Coarse, 9	Speciated PM2.5, 11	Speciated PM2.5, 12
Primary / QA Collocated / Other	Other	Other	Other	Other
Parameter code	85101	88101	88502	88502
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Population Exposure	Highest Concentration	Highest Concentration	Highest Concentration
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	NCORE	NCORE	N/A	N/A
Instrument manufacturer and model	Met One BAM 1020	Met One BAM 1020	Met One SASS, A Sampler	Met One SASS, B Sampler
Method code	122	170	810	810
FRM/FEM/ARM/other	FEM	FEM	Other	Other
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD

Reporting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring start date (MM/DD/YYYY)	11/04/2010	03/08/2011	03/2001	03/2001
Current sampling frequency (e.g. 1:3, continuous)	1:1	1:1	1:6	1:6
Calculated sampling frequency (e.g. 1:3/1:1)	N/A	N/A	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	12.0	12.8	12.0	12.0
Distance from supporting structure (meters)	2.0	2.0	2.0	2.0
Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	51	51	51	51
Distance between collocated monitors (meters)	4	4	2	2
Unrestricted airflow (degrees)	360°	360°	360°	360°
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A	N/A
Residence time for reactive gases (seconds)	N/A	N/A	N/A	N/A
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	No, unless the manual sampler has missing data.	N/A	N/A
Frequency of flow rate verification for manual PM samplers	N/A	N/A	Monthly	Monthly
Frequency of flow rate verification for automated PM analyzers	Monthly	Monthly	N/A	N/A

Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	04/10/2019, 10/24/2019	04/10/2019, 10/04/2019	03/19/2019, 08/27/2019	03/19/2019, 08/27/2019

Pollutant, POC	24 Hour PM2.5, 1	24 Hour PM2.5, 2	24 Hour VOCs, 2	24 Hour VOCs, 1
Primary / QA Collocated / Other	Primary	QA Collocated	N/A	N/A
Parameter code	88101	88101	PAMS Priority Compounds	PAMS Priority Compounds
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Highest Concentration	Highest Concentration	Highest Concentration	Highest Concentration
Monitor (type)	SLAMS	SLAMS	Research Support	Research Support
Network Affiliation	N/A	N/A	NATTS	PAMS
Instrument manufacturer and model	Thermo 2025i PM2.5, A Sampler	Thermo 2025i PM2.5, B Sampler	Xontech 910A, A Sampler	Xontech 910A, B Sampler
Method code	145	145	110	110
FRM/FEM/ARM/ other	FRM	FRM	Other	Other
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Reporting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring start date (MM/DD/YYYY)	01/1999	01/1999	01/2007	01/2007
Current sampling frequency (e.g. 1:3, continuous)	1:1	1:6	1:6	1:1 during Intensive PAMS Season
Calculated sampling frequency (e.g. 1:3/1:1)	1:3	1:6	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	07/01-09/30
Probe height (meters)	12.1	12.1	12.6	12.6
Distance from supporting structure (meters)	2.0	2.0	1.0	1.0



Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	52	52	52	52
Distance between collocated monitors (meters)	2	2	2	2
Unrestricted airflow (degrees)	360°	360°	360°	360°
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	Stainless steel	Stainless steel
Residence time for reactive gases (seconds)	N/A	N/A	0.1	0.1
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	Yes	Yes	N/A	N/A
Frequency of flow rate verification for manual PM samplers	Monthly	Monthly	N/A	N/A
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	Semi Annually	Semi Annually
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	06/05/2019	06/05/2019
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	05/14/2019, 10/17/2019	05/14/2019, 10/17/2019	02/12/2019, 08/06/2019	02/12/2019, 08/06/2019

Pollutant, POC	24 hour Cr6, 4	24 hour Cr6, 5	Polycyclic Aromatic Hydrocarbons, 1	Hourly VOC, TBD
Primary / QA Collocated / Other	N/A	N/A	N/A	N/A
Parameter code	12112	12112	17202	PAMS Priority
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Population Exposure	Population Exposure	Population Exposure	Highest Concentration
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	NATTS	NATTS	NATTS	PAMS
Instrument manufacturer and model	RM Env. 924, A Sampler	RM Env. 924, B Sampler	Tisch PUF	Agilent Markes
Method code	304	304	106	227
FRM/FEM/ARM/ other	Other	Other	Other	Other
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Reporting Agency	South Coast AQMD	South Coast AQMD	ERG North Carolina	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Urban	Urban	Urban	Neighborhood
Monitoring start date (MM/DD/YYYY)	01/2007	01/2007	01/2007	06/01/2019
Current sampling frequency (e.g.1:3, continuous)	1:6	6 samples per year	1:6	1:6 or 1:1 Intensive PAMS
Calculated sampling frequency (e.g. 1:3/1:1)	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	12.18	12.18	12.18	12.3
Distance from supporting structure (meters)	2.0	2.0	2.0	2
Distance from obstructions on roof (meters)	N/A	N/A	Yes	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	52	52	52	52
Distance between collocated monitors (meters)	2	2	N/A	N/A

Unrestricted airflow (degrees)	360°	360°	360°	360
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A	Pyrex, Stainless steel
Residence time for reactive gases (seconds)	N/A	N/A	N/A	10
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers	Monthly	Monthly	N/A	N/A
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	03/19/2019, 11/8/2019	03/19/2019, 11/08/2019	N/A	N/A

Pollutant, POC	Metals, Cr6, Carbonyls, N/A	24 Hour VOCs, N/A	Carbonyls, 2	Hourly Carbonyls, TBD
Primary / QA Collocated / Other	N/A	N/A	N/A	N/A
Parameter code	N/A	N/A	PAMS Priority Compounds	PAMS Priority Compounds
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Population Exposure	Population Exposure	Highest Concentration	Highest Concentration
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	N/A	N/A	PAMS	PAMS
Instrument manufacturer and model	RM Env. 924	RM Env. 910PC	Atec 8000	Atec 8000

Method code	N/A	N/A	179	179
FRM/FEM/ARM/ other	Other	Other	Other	Other
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	ARB Toxics	ARB Toxics	South Coast AQMD	South Coast AQMD
Reporting Agency	ARB	ARB	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring start date (MM/DD/YYYY)	01/1989	01/1989	06/01/2009	06/01/2009
Current sampling frequency (e.g.1:3, continuous)	1:12	1:12	1:6 or 1:1 Intensive PAMS	1:6 or 1:1 Intensive PAMS
Calculated sampling frequency (e.g. 1:3/1:1)	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.	No CFR mandated sampling schedule.
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	12.18	12.6	12.3	12.3
Distance from supporting structure (meters)	2.0	2.3	2.0	2.0
Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	52	52	52	52
Distance between collocated monitors (meters)	2	2	N/A	N/A
Unrestricted airflow (degrees)	360	360	360	360
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	Stainless steel	Stainless steel	Stainless steel
Residence time for reactive gases (seconds)	N/A	N/A	5.0	5.0
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	N/A	N/A	N/A

Frequency of flow rate verification for manual PM samplers	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	06/05/2019	06/05/2019
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	03/19/2019, 08/06/2019	08/06/2019

Pollutant, POC	PM2.5 Carbon, N/A	Speciated PM2.5, N/A	Speciated PM2.5, N/A	
Primary / QA Collocated / Other	N/A	N/A	N/A	
Parameter code	N/A	N/A	N/A	
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	
Site type(s)	Population Exposure	Population Exposure	Population Exposure	
Monitor (type)	SLAMS	SLAMS	SLAMS	
Network Affiliation	STN	STN	STN /QA Collocated	
Instrument manufacturer and model	URG 3000, A Sampler	Met One SASS, A Sampler	Met One SASS, B Sampler	
Method code	N/A	N/A	N/A	
FRM/FEM/ARM/ other	Other	Other	Other	
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	
Analytical Lab (i.e., weigh lab, toxics lab, other)	EPA STN	EPA STN	EPA STN	
Reporting Agency	EPA	EPA	EPA	
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	
Monitoring start date (MM/DD/YYYY)	03/07/2007	03/2001	03/2001	
Current sampling frequency (e.g. 1:3, continuous)	1:3	1:3	1:6	
Calculated sampling frequency (e.g. 1:3/1:1)	1:3	1:3	1:3	

Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	
Probe height (meters)	12.3	12.0	12.0	
Distance from supporting structure (meters)	2.0	2.0	2.0	
Distance from obstructions on roof (meters)	N/A	N/A	N/A	
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	
Distance from trees (meters)	N/A	N/A	N/A	
Distance to furnace or incinerator flue (meters)	52	52	52	
Distance between collocated monitors (meters)	2	2	2	
Unrestricted airflow (degrees)	360°	360°	360°	
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A	
Residence time for reactive gases (seconds)	N/A	N/A	N/A	
Will there be changes within the next 18 months? (Y/N)	No	No	No	
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	N/A	N/A	
Frequency of flow rate verification for manual PM samplers	Monthly	Monthly	Monthly	
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A	

Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	03/19/2019, 08/27/2019	03/27/2019, 08/27/2019	
--	-----	------------------------	------------------------	--

Pollutant, POC	Carbon Monoxide, 9	NOy, 9	Nitrogen Dioxide, 3	UVR, 1
Primary / QA Collocated / Other	N/A	N/A	N/A	N/A
Parameter code	42101	42612	42602	63302
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Population Exposure	Highest Concentration	Highest Concentration	Meteorological
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	NCORE	NCORE	PAMS\NCORE	PAMS/NCORE
Instrument manufacturer and model	Teledyne 300EU	Thermo 42i-Y	Teledyne T500U	Eppley TUVR
Method code	593	574	212	011
FRM/FEM/ARM/ other	FRM	N/A	FEM	N/A
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	N/A	N/A	N/A	N/A
Reporting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Neighborhood	Neighborhood	Neighborhood	Urban/ Neighborhood
Monitoring start date (MM/DD/YYYY)	01/01/2011	01/01/2011	06/01/2019	09/1979
Current sampling frequency (e.g.1:3, continuous)	1:1	1:1	1:1	Continuous
Calculated sampling frequency (e.g. 1:3/1:1)	N/A	N/A	N/A	1:1
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	12.3	12.3	12.3	13.1
Distance from supporting structure (meters)	2.0	2.0	2.0	2.6
Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or	45	45	45	45

incinerator flue (meters)				
Distance between collocated monitors (meters)	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees)	360°	360°	360°	360°
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	Teflon	Teflon	Teflon	N/A
Residence time for reactive gases (seconds)	8.2	2.2		N/A
Will there be changes within the next 18 months? (Y/N)	No	No	No	No
Is it suitable for comparison against the annual PM2.5? (Y/N)	No	No	N/A	N/A
Frequency of flow rate verification for manual PM samplers	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	Nightly	Nightly	Nightly	N/A
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	12/24/2019	12/24/2019	12/14/2019	N/A
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A

Pollutant, POC	WS & D, 1/1	RH/T, 1/1	BP, 1	SR, 1
Primary / QA Collocated / Other	N/A	N/A	N/A	N/A
Parameter code	61101/61102	62201/62101	64101	63301
Basic monitoring objective(s)	NAAQS	NAAQS	NAAQS	NAAQS
Site type(s)	Meteorological	Meteorological	Meteorological	Meteorological
Monitor (type)	SLAMS	SLAMS	SLAMS	SLAMS
Network Affiliation	PAMS/NCORE	PAMS/NCORE	PAMS/NCORE	PAMS/NCORE
Instrument	RM Young 05305V	Rotronic HC2-S3	Vaisala PTB110	Kipp & Zonen CMP6



manufacturer and model				
Method code	065/065	063/061	015	011
FRM/FEM/ARM/ other	N/A	N/A	N/A	N/A
Collecting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Analytical Lab (i.e., weigh lab, toxics lab, other)	N/A	N/A	N/A	N/A
Reporting Agency	South Coast AQMD	South Coast AQMD	South Coast AQMD	South Coast AQMD
Spatial scale (e.g. micro, neighborhood)	Urban/ Neighborhood	Urban/ Neighborhood	Urban/ Neighborhood	Urban/ Neighborhood
Monitoring start date (MM/DD/YYYY)	09/1979	09/1979	09/1979	09/1979
Current sampling frequency (e.g.1:3, continuous)	Continuous	Continuous	Continuous	Continuous
Calculated sampling frequency (e.g. 1:3/1:1)	1:1	1:1	1:1	1:1
Sampling season (MM/DD-MM/DD)	01/01-12/31	01/01-12/31	01/01-12/31	01/01-12/31
Probe height (meters)	18.0	13.1	12.1	13.1
Distance from supporting structure (meters)	7.2	2.6	1.5	2.6
Distance from obstructions on roof (meters)	N/A	N/A	N/A	N/A
Distance from obstructions not on roof (meters)	N/A	N/A	N/A	N/A
Distance from trees (meters)	N/A	N/A	N/A	N/A
Distance to furnace or incinerator flue (meters)	50	45	45	45
Distance between collocated monitors (meters)	N/A	N/A	N/A	N/A
Unrestricted airflow (degrees)	360°	360°	360°	360°
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A	N/A	N/A	N/A
Residence time for reactive gases (seconds)	N/A	N/A	N/A	N/A
Will there be changes within the next 18 months? (Y/N)	No	No	No	No

Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A	N/A	N/A	N/A
Frequency of flow rate verification for manual PM samplers	N/A	N/A	N/A	N/A
Frequency of flow rate verification for automated PM analyzers	N/A	N/A	N/A	N/A
Frequency of one-point QC check for gaseous instruments	N/A	N/A	N/A	N/A
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A	N/A	N/A	N/A
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	N/A	N/A	N/A	N/A

**Los Angeles (Main St.)  
Site Photos**



**Looking North from the probe.**



**Looking East from the probe.**



**Looking South from the probe.**



**Looking West from the probe.**

**Los Angeles (Main St.)  
Site Photos (Cont.)**



**Looking at the probe from the North.**



**Looking at the probe from the East.**



**Looking at the probe from the South.**



**Looking at the probe from the West.**

**Los Angeles (Main St.)  
Site Photos**



**Looking North from the probe.**



**Looking East from the probe.**



**Looking South from the probe.**



**Looking West from the probe.**

**Los Angeles (Main St.)  
Site Photos (Cont.)**



**Looking at the probe from the North.**



**Looking at the probe from the East.**



**Looking at the probe from the South.**



**Looking at the probe from the West.**