

Prepared for
Sterigenics US, LLC
Facility ID's 126060
Ontario, California

Project Number
1690027195

Submittal Dates
March 28, 2023
January 2, 2024

RULE 1402 AIR TOXICS HEALTH RISK ASSESSMENT

STERIGENICS U.S., LLC
ONTARIO, CALIFORNIA

Modified by
South Coast AQMD

Modification Date:
October 3, 2025

Executive Table: Required modifications made by South Coast AQMD

Section/Page	Modifications	Reason for modification
Throughout Document	Update with results of modeling performed by South Coast AQMD staff	These changes were made to align the document with the modeling methods required by South Coast AQMD as outlined in the AB2588 and Rule 1402 Supplementary Guidelines and the results of said modeling.
Table ES-1	Update the annual average emissions and maximum one-hour emissions for Ethylene Oxide.	Update the report to show estimates derived from U.S.EPA methodology.
Table ES-2	Update the exposure pathways for certain compounds	This change was made to align the document with OEHHA Guidelines.
Section 2.2	Include additional monitoring data from South Coast AQMD EtO monitoring near the facility and in Rubidoux	This change was made in an effort to be transparent with the data available at the time of modification.
Section 2.5.1	<ul style="list-style-type: none"> • Update percentage of EtO usage that enters the scrubber from 95% to 93.36%. • Update fugitive emissions factor. • Clarify that 5% of emissions going to the abators are from process emissions. 	The changes were made to align the document with U.S. EPA methodologies.
Section 2.6	<ul style="list-style-type: none"> • Remove language stating that the Willowbrook study will be used to estimate fugitive emissions. • Add language explaining that the U.S. EPA method for estimating fugitive emissions will be used. • Add a table that lists the industry average percentages of EtO usage per emission source group. 	The changes were made to align the document with U.S. EPA methodologies.
	Update description of fugitive volume sources and allocation of emissions.	This change was made to align the document with the modeling methods required by South Coast AQMD as outlined in the AB2588 and Rule 1402 Supplementary Guidelines.
Section 3.6	Update receptor totals.	These changes were made to align the document with the modeling methods required by South Coast AQMD as outlined in the AB2588 and Rule 1402 Supplementary Guidelines and ensure all sensitive receptors and census receptors within the zone of impact were evaluated.
Section 4.3.1	Update cancer risk equation	This change was made to reflect the most up-to-date guidance from OEHHA.
Section 6.1	<ul style="list-style-type: none"> • Remove language regarding the Willowbrook study. • Add language explaining that the U.S. EPA method for estimating fugitive emissions will be used for the ATIR. 	The changes were made to align the document with U.S. EPA methodologies.

CONTENTS

	Page
EXECUTIVE SUMMARY	ES-1
1. INTRODUCTION	1
1.1 Background	1
1.2 Health Risk Assessment Format and Definitions	1
1.3 Significance Criteria and Notification Levels	2
1.4 Objectives	2
2. HAZARD IDENTIFICATION	4
2.1 Site Description and Facility Operations	4
2.2 Ethylene Oxide Monitoring	4
2.3 Substances Emitted and Evaluated	6
2.4 TAC Emission Sources	7
2.5 Sterilization Process Emissions	7
2.6 Fugitive Emissions	8
2.7 Combustion Source Emissions	9
3. EXPOSURE ASSESSMENT	11
3.1 Air Dispersion Modeling	11
3.2 Source Characterization	11
3.3 Source Parameters and Operating Schedules	11
3.4 Building Downwash	12
3.5 Dispersion Parameters	12
3.6 Receptor Locations	12
3.7 Coordinate System	13
3.8 Meteorological Data	13
3.9 Terrain	13
3.10 Averaging Times	13
3.10.1 Long Term	13
3.10.2 Short Term	13
3.11 Dispersion Factors	13
3.12 Ground-Level Concentrations	14
4. RISK ASSESSMENT PROCEDURES	15
4.1 Identification of Potentially Exposed Populations	15
4.1.1 Estimation of Exposure Point Concentrations	15
4.1.2 Exposure Pathways	15
4.1.3 Exposure Assumptions	16
4.1.4 HARP Exposure Analysis Methods	16
4.2 Dose-Response Assessment	18
4.3 Risk Characterization Methodology	18
4.3.1 Carcinogenic Risks	18
4.3.2 Chronic Non-Cancer Hazards	19
4.3.3 Acute Non-Cancer Hazards	19
5. RISK CHARACTERIZATION FOR AB2588	21
5.1 Carcinogens	21
5.1.1 Point of Maximum Impact (PMI)	21
5.1.2 Resident (MEIR)	21

CONTENTS (CONTINUED)

5.1.3	Off-Site Worker (MEIW)	22
5.1.4	Maximally Exposed Individual Sensitive Receptor (MEISR)	22
5.1.5	Population Exposure & Cancer Burden	22
5.2	Non-Carcinogens	22
5.2.1	Chronic HI	23
5.2.2	8-Hour Chronic HI	23
5.2.3	Acute HI	24
6.	UNCERTAINTIES	26
6.1	Estimation of Emissions	26
6.2	Estimation of Exposure Concentrations	26
6.2.1	Estimates from Air Dispersion Models	26
6.2.2	Meteorological Data Selection	27
6.3	Risk Characterization	27
6.3.1	Exposure Assumption Uncertainties	27
6.3.2	Dose-Response Assessment	27
6.3.3	Risk Calculation	28
7.	CONCLUSIONS	29
7.1	Public Notice	29
7.2	Risk Reduction Plan (RRP)	29
7.3	Current Mitigation Measures	29
8.	REFERENCES	31

CONTENTS *(CONTINUED)*

TABLES

Table ES-1:	TAC Emission Rates by Source
Table ES-2:	Exposure Pathway and Target Organ by TAC
Table ES-3:	Summary of Health Risks
Table HI-1:	Emissions of EtO by Process Group Per U.S. EPA
Table 1:	List of TAC Compounds, Associated Endpoints Evaluated, and Identification of Non-inhalation Pathways
Table 2:	2021 Modeled Annual Emissions by Source and Substance
Table 3:	2021 Modeled Annual Emissions by Substance
Table 4:	2021 Modeled Maximum Hourly Emissions by Source and Substance
Table 5:	2021 Modeled Maximum Hourly Emissions by Substance
Table 6:	Summary of Model Options and Parameters
Table 7:	Point Source Modeling Parameters
Table 8:	Volume Source Modeling Parameters
Table 9:	Building Downwash Parameters
Table 10:	Modeled Sensitive Receptors
Table 11:	2021 Ground-level Concentrations (GLCs) at the PMI, MEIR, MEIW and MEISR
Table 12:	Multipathway Substances and Pathways
Table 13:	HARP 2 Risk Analysis Options
Table 14:	Target Organ Systems for Non-cancer Health Effects
Table 15:	2021 Health Effects Results for PMI, MEIR, and MEIW
Table 16:	Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk PMI
Table 17:	Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk MEIR
Table 18:	Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk MEIW
Table 19:	Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk MEISR
Table 20:	Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk PMI
Table 21:	Excess Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk PMI
Table 22:	Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk MEIR
Table 23:	Excess Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk MEIR
Table 24:	Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk MEIW
Table 25:	Excess Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk MEIW
Table 26:	Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk MEISR
Table 27:	Excess Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk MEISR
Table 28:	Population Exposure within 2021 Modeled Zone of Impact
Table 29:	Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI PMI
Table 30:	Chronic Health Quotients by Source at the 2021 Modeled Chronic HI PMI
Table 31:	Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI MEIR
Table 32:	Chronic Health Quotients by Source at the 2021 Modeled Chronic HI MEIR
Table 33:	Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI MEIW

CONTENTS (CONTINUED)

TABLES

Table 34:	Chronic Health Quotients by Source at the 2021 Modeled Chronic HI MEIW
Table 35:	Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI MEISR
Table 36:	Chronic Health Quotients by Source at the 2021 Modeled Chronic HI MEISR
Table 37:	8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI PMI
Table 38:	8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI PMI
Table 39:	8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI MEIR
Table 40:	8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI MEIR
Table 41:	8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI MEIW
Table 42:	8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI MEIW
Table 43:	8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI MEISR
Table 44:	8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI MEISR
Table 45:	Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI PMI
Table 46:	Acute Health Quotients by Source at the 2021 Modeled Acute HI PMI
Table 47:	Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI MEIR
Table 48:	Acute Health Quotients by Source at the 2021 Modeled Acute HI MEIR
Table 49:	Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI MEIW
Table 50:	Acute Health Quotients by Source at the 2021 Modeled Acute HI MEIW
Table 51:	Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI MEISR
Table 52:	Acute Health Quotients by Source at the 2021 Modeled Acute HI MEISR
Table 53:	Cancer Risks and Population Totals at Census Receptors

CONTENTS *(CONTINUED)*

FIGURES

- Figure ES-1: Residential Cancer Risk Isopleths (30-Year Exposure)
- Figure ES-2: Locations of PMI, MEIR, MEIW, and MEISR for Cancer Risk
- Figure ES-3: Locations of PMI, MEIR, MEIW, and MEISR for Chronic Hazard Index
- Figure ES-4: Locations of PMI, MEIR, MEIW, and MEISR for 8-Hour Chronic Hazard Index
- Figure ES-5: Locations of PMI, MEIR, MEIW, and MEISR for Acute Hazard Index

- Figure 1: Site Location
- Figure 2: Site Plot Plan with Sources and Buildings
- Figure 3a: Receptors (500 Meter Spacing) and Meteorological Station
- Figure 3b: Receptors (250 Meter Spacing)
- Figure 3c: Receptors (100 Meter Spacing)
- Figure 3d: Receptors (20 Meter Spacing)
- Figure 3e: Census Block Centroid Receptors
- Figure 4: Wind Rose for Ontario International Airport Station
- Figure 5: Locations of PMI, MEIR, MEIW, and MEISR for Cancer Risk
- Figure 6: Locations of PMI, MEIR, MEIW, and MEISR for Chronic Hazard Index
- Figure 7: Locations of MEIR, MEIW and PMI for 8-Hour Chronic Hazard Index
- Figure 8: Locations of MEIR, MEIW and PMI for Acute Hazard Index
- Figure 9: Sensitive Receptors with Cancer Risk > 1 Chance in-One-Million
- Figure 10: Residential Cancer Risk Isopleths (30-Year Exposure)
- Figure 11: Worker Cancer Risk Isopleths (25-Year Exposure)
- Figure 12: Worker Chronic Risk Isopleths

APPENDICES

- Appendix A: AERMOD Dispersion Modeling Files *[Provided Electronically]*
- Appendix B: HARP2 Files *[Provided Electronically]*

DEFINITIONS

Acute Health Impacts: non-cancer health impacts for short-term, one-hour peak exposures to potential Facility emissions. Acute Reference Exposure Levels (RELs), which are used to calculate acute non-cancer hazards, are developed so as to represent “an exposure that is not likely to cause adverse health effects in a human population, included sensitive subgroups, exposed to that concentration ... for the specified exposure duration on an intermittent basis” (OEHHA 2015).

Chronic Health Impacts: non-cancer health impacts from long-term exposure to potential Facility emissions. Chronic RELs, which are used to calculate chronic non-cancer hazards, are developed so as to represent the level “at or below which no adverse health effects are anticipated following long-term exposure. Long-term exposure for these purposes has been defined as 12% of a lifetime, or about eight years for humans.” (OEHHA 2015)

8-Hour Chronic Health Impacts: non-cancer health impacts for exposures that occur on a recurrent basis but only during a portion of each day. The 8-hour RELs are designed to protect against periodic exposure that could occur as often as daily and may share characteristics of both acute and chronic exposure. These RELs were developed because of concerns that applying the chronic REL in some cases was overly conservative. 8-hour RELs are “concentrations at or below which adverse health effects are not likely to occur in the general human population with intermittent exposures of eight hours per day, up to 7 days per week.” (OEHHA 2015)

Cancer Health Impacts: carcinogenic risks estimated as the incremental probability that an individual will develop cancer over a lifetime as a direct result of exposure to carcinogens potentially present in Facility emissions (USEPA 1989). Cancer inhalation and oral potency factors, which are used to calculate cancer risk, are “expressed as the upper bound of probability of developing cancer assuming continuous lifetime exposure to a substance at a dose of one milligram per kilogram of body weight It is assumed in cancer risk assessments that risk is directly proportional to dose and that there is no threshold for carcinogenesis. The derivation of carcinogenic inhalation and oral cancer potency factors takes into account the available information on pharmacokinetics and on the mechanism of carcinogenic action. These values are generally the 95% upper confidence limit (UCL) on the dose-response slope.” (OEHHA 2015)

ACRONYMS AND ABBREVIATIONS

AB:	Assembly Bill
ARB:	(California) Air Resources Board
AER:	Annual Emission Reporting
AERMOD:	American Meteorological Society/Environmental Protection Agency regulatory air dispersion model
AERMAP:	AMS/EPA Regulatory Model Terrain Pre-processor
ADMRT:	Air Dispersion Modeling and Risk Tool
ATIR:	Air Toxic Inventory Report
BPIPPRIME:	Building Profile Input Program PRIME
Cal/EPA:	California Environmental Protection Agency
CELA:	Central Los Angeles
CPF:	Cancer Potency Factor
EARP:	Early Action Reduction Plan
EtO:	Ethylene Oxide
GLC:	Ground-Level Concentration
HARP:	Hotspots Analysis and Reporting Program
HI:	Hazard Index
HQ:	Hazard Quotient
HRA:	Health Risk Assessment
MICR:	Maximum Individual Cancer Risk
MEIR:	Maximally Exposed Individual Resident
MEIW:	Maximally Exposed Individual Worker
MEISR:	Maximally Exposed Individual Sensitive Receptor
MSDS:	Material Safety Data Sheet
NED:	National Elevation Dataset
OEHHA:	Office of Environmental Health Hazard Assessment
PMI:	Point of Maximum Impact
P/O:	Permit to Operate
REL:	Reference Exposure Levels
RRP:	Risk Reduction Plan
South Coast AQMD:	South Coast Air Quality Management District
SCR:	Selective Catalytic Reduction
SNCR:	Selective Non-Catalytic Reduction
TAC:	Toxic Air Contaminant
USEPA:	United States Environmental Protection Agency
USGS:	United States Geological Survey
UTM:	Universal Transverse Mercator
WGS:	World Geodetic System

LIST OF UNITS

µg:	microgram
g:	gram
hr:	hour
L:	liter
Kg:	kilogram
km:	kilometer
m:	meter
m ³ :	cubic meter
mg:	milligram
s:	second
yr:	year

EXECUTIVE SUMMARY

In accordance with the California Air Toxics "Hot Spots" Act (AB2588) and South Coast Air Quality Management District (South Coast AQMD) Rule 1402, this report presents the human health risk assessment (HRA) for the Sterigenics U.S., LLC (Sterigenics) facility, located at 687 Wanamaker Ave, Ontario, California (South Coast AQMD Facility ID 126060) based on the South Coast AQMD approved 2021 Air Toxic Contaminants (TACs) emission inventory.

The South Coast AQMD designated Ontario facility as potentially high-risk level facility based on ambient monitoring data in the immediate local vicinity. Sterigenics previously submitted an AB2588 HRA to SCAQMD on March 28, 2023 (referred to hereinafter as the "Original 2021 HRA"). In response to the review comments on the Original 2021 HRA by South Coast AQMD in its letter to Sterigenics dated October 31, 2023, a health risk assessment was prepared based on the operating conditions and combined toxic air contaminant (TAC) emission inventory for calendar year 2021. The revised report was then modified by the South Coast AQMD to address deficiencies (referred to hereinafter as "Modified 2021 HRA"). The annual and hourly TAC emissions are shown in **Table ES-1** as those presented in the modified ATIR approved by the South Coast AQMD on October 5, 2023. **Table ES-2** lists the exposure pathway and target organ system for the air toxics emitted from Sterigenics.

This HRA was prepared following the Office of Environmental Health Hazard Assessment (OEHHA) Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessment (OEHHA, 2015), the latest toxicity values published by OEHHA, the South Coast AQMD's Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spots" Information and Assessment Act (South Coast AQMD, 2020), and the United States Environmental Protection Agency (USEPA) Guidelines on Air Quality Models (USEPA, 2005).

Ethylene oxide (EtO) is classified as one of the 188 hazardous air pollutants in the Clean Air Act. In December 2016, U.S. EPA published an updated evaluation of the inhalation carcinogenicity for EtO, which results in an equivalent cancer risk many times higher than estimated by OEHHA. Using the current OEHHA cancer potency factor for EtO, a concentration of 0.26 ppbv is approximately equivalent to a residential lifetime cancer risk of 100 chances in-one-million. Meanwhile, the updated U.S. EPA Integrated Risk Information System (IRIS) carcinogenicity factor is equivalent to over 2,300 in-one-million lifetime cancer risk when exposed continuously to a concentration of 0.26 ppbv. Subsequently, OEHHA released a draft updated cancer inhalation unit risk factor (IUR) for EtO on April 7, 2023, which is much closer to the current IRIS unit risk estimate. OEHHA has not finalized this draft update, as a result this HRA was prepared using OEHHA's current IUR for EtO per OEHHA's guidelines. If OEHHA ultimately finalizes a higher cancer potency value, then the resulting estimated health risks from Sterigenics would be higher. Once finalized, any future HRAs will utilize the updated IUR.

Sterigenics operates a medical sterilization business. The Ontario facility sterilizes medical devices such as surgical kits, medical hardware, gowns and drapes, surgical accessories, and medical packaging using ethylene oxide (EtO). The Sterigenics Ontario facility is subject to South Coast Air Quality Management District (South Coast AQMD or District) rules and regulations, including Rule 1405, "Control of Ethylene Oxide and Chlorofluorocarbon Emissions from Sterilization or Fumigation Processes." Potential onsite sources of emissions include the process emissions from sterilization vacuum chambers, chamber back vents, aeration room, fugitive sources from the building and outdoor process area, natural gas boilers, as well as a diesel-fueled emergency generator.

The AB2588 HRA was conducted in four steps:

- The first step in the HRA was to identify the toxic air contaminants (TACs) of concern, sources of those contaminants, and to estimate the emissions from each source. This process is called "hazard identification."
- The second step, called "exposure assessment," was to quantify the amount of TACs that people are exposed to during a specific time period, as well as the total number of people exposed. USEPA AERMOD Executable Version 23123 and the South Coast AQMD selected meteorological station data were used to perform the air dispersion modeling for this Modified 2021 HRA to estimate the ground level air concentrations of the TACs.
- The third step is called "dose-response assessment." Dose is the amount of a chemical that enters the human body (or reaches a target organ); response is the resulting health effect from the level of the dose. The Hot Spots Analysis and Reporting Program (HARP) software was used to perform the calculations for this step as well as for the last step. Exposure pathways evaluated in the HRA include inhalation, dermal absorption, soil ingestion, homegrown produce, and mother's milk for the residential scenario and inhalation, dermal absorption, and soil ingestion for the worker scenario.
- The last step of the risk assessment process is called "risk characterization." Risk characterization ties together the above three processes to describe the type and magnitude of any increased health risks as a result of the exposure to the toxic air emissions from a facility.

AB2588 HRA Results

The estimated incremental cancer risk for the maximally exposed individual resident (MEIR) is 2.3 chances in-one- million, and for the maximally exposed individual worker (MEIW) is 568.0 chances in-one-million. The maximally exposed sensitive receptor is Port View Preparatory, located at 1460 S Milliken Avenue, Ontario, CA 91761; this receptor has an estimated cancer risk of 6.6 chances in-one-million, based on a 30-year residential exposure assumption. Fugitive emissions are the primary contributor to the cancer risk. Detailed discussions on the locations of the Maximum Impact (PMI), MEIR, MEIW, and maximally exposed individual sensitive receptor (MEISR) for cancer and non-cancer risks and 30-year one chance in-one-million cancer risk "zone of impact" are all included in Section 5. The excess cancer burden for the total population within the zone of impact is 0.05.

The chronic hazard indices (HIC) are as follows: 1.09 at the PMI, well below 0.01 at the MEIR, and 1.09 at the MEIW, not accounting for background concentrations. The highest HIC among the sensitive receptors is well below 0.01 at Port View Preparatory. Ethylene oxide is the primary contributor to the highest HIC. Central Nervous System (CNS) is the primary target organ.

The 8-hr chronic hazard index (HIC) at the PMI, MEIR, and MEIW are well below 0.01, not accounting for any background concentrations. The highest HIC among the sensitive receptors is well below 0.01 at Live Oak Elementary. Ethylene oxide is the primary contributor to the highest HIC. Respiratory System is the primary target organ.

The acute hazard index (HIA) at the PMI, MEIR and MEIW are well below 0.01. The highest HIA for the sensitive receptors is well below 0.01 at Uplift High School. Acrolein, ammonia, and formaldehyde emissions are the primary contributors to the highest HIA. The eye is the primary target organ.

The South Coast AQMD's public notification thresholds are as follows:

- ≥ 10 chances in-one- million maximum individual (lifetime) cancer risk (MICR), or

- > 1.0 HIA, or
- > 1.0 HIC.

The South Coast AQMD Rule 1402 action risk levels for a risk reduction plan are as follows:

- Cancer risk (MICR): 25 chances in-one-million, or
- Cancer burden: 0.5, or
- HIA: 3.0, or
- HIC: 3.0.

South Coast AQMD Rule 1402 also establishes the risk reduction significant risk levels:

- MICR of 100 in one million (1.0×10^{-4}), or
- HIA or HIC of five (5.0) for any target organ system at any receptor location.

The AB2588 HRA results based on the 2021 emissions indicate that the MICR cancer risk of 568.0 chances in-one-million exceeds the South Coast AQMD Rule 1402 public notification threshold of 10 chances in-one-million and action risk threshold of 25 chances in-one-million. The HRA results also show that the chronic HI at a worker receptor of 1.09 exceeds the South Coast AQMD Rule 1402 public notification threshold of 1, but is below the action risk threshold of 3. The HRA results for cancer burden, 8-hr chronic HI and acute HI are all below the Rule 1402 notification and action risk levels. Sterigenics was designated as a Potentially High-Risk Level Facility based on ambient ethylene oxide data; therefore, a risk reduction plan is required, as well as expedited actions based on the significant risk level threshold.

An Early Action Reduction Plan (EARP) was approved by the South Coast AQMD on April 7, 2023. Sterigenics has already begun implementing some of the risk reduction measures provided in the EARP, per the Rule 1402 requirements. A revised Risk Reduction Plan (RRP) was submitted for South Coast AQMD's approval on October 6, 2023.

Figure ES-1 at the end of this Executive Summary shows cancer results for the Modified 2021 HRA; ten chances in-one-million and twenty-five chances in-one-million cancer risk isopleths for the HRA results based on the 30-year residential exposure assumptions are presented. 10 chances in-one-million risk level corresponds to the public notification level, and 25 chances in-one-million represents the higher risk levels that trigger risk reduction planning.

Figure ES-2, Figure ES-3, Figure ES-4, Figure ES-5 show the locations of PMI, MEIR, MEIW, and MEISR for cancer risk, chronic HI, 8-hr chronic HI, and acute HI, respectively.

Table ES-1: TAC Emissions by Source					
Source ID	Source Description	Compound		Annual Emissions	Hourly Emissions
		CAS Number / Pollutant ID	Name	lb/year	lb/hr
BOILER1	Boiler #1	71-43-2	Benzene	2.32E-02	2.65E-06
BOILER1		50-00-0	Formaldehyde	4.93E-02	5.62E-06
BOILER1		1151	Total PAHs [excluding naphthalene]	2.90E-04	3.31E-08
BOILER1		91-20-3	Naphthalene	8.69E-04	9.92E-08
BOILER1		75-07-0	Acetaldehyde	1.25E-02	1.42E-06
BOILER1		107-02-8	Acrolein	7.82E-03	8.93E-07
BOILER1		7664-41-7	Ammonia	9.27E+00	1.06E-03
BOILER1		100-41-4	Ethyl Benzene	2.75E-02	3.14E-06
BOILER1		110-54-3	Hexane	1.83E-02	2.08E-06
BOILER1		108-88-3	Toluene	1.06E-01	1.21E-05
BOILER1		1330-20-7	Xylene	7.88E-02	9.00E-06
BOILER2		Boiler #2	71-43-2	Benzene	2.32E-02
BOILER2	50-00-0		Formaldehyde	4.93E-02	5.62E-06
BOILER2	1151		Total PAHs [excluding naphthalene]	2.90E-04	3.31E-08
BOILER2	91-20-3		Naphthalene	8.69E-04	9.92E-08
BOILER2	75-07-0		Acetaldehyde	1.25E-02	1.42E-06
BOILER2	107-02-8		Acrolein	7.82E-03	8.93E-07
BOILER2	7664-41-7		Ammonia	9.27E+00	1.06E-03
BOILER2	100-41-4		Ethyl Benzene	2.75E-02	3.14E-06
BOILER2	110-54-3		Hexane	1.83E-02	2.08E-06
BOILER2	108-88-3		Toluene	1.06E-01	1.21E-05
BOILER2	1330-20-7		Xylene	7.88E-02	9.00E-06

Table ES-1: TAC Emissions by Source					
Source ID	Source Description	Compound		Annual Emissions	Hourly Emissions
		CAS Number / Pollutant ID	Name	lb/year	lb/hr
BOILER5	Boiler #5	71-43-2	Benzene	2.32E-02	2.65E-06
BOILER5		50-00-0	Formaldehyde	4.93E-02	5.62E-06
BOILER5		1151	Total PAHs [excluding naphthalene]	2.90E-04	3.31E-08
BOILER5		91-20-3	Naphthalene	8.69E-04	9.92E-08
BOILER5		75-07-0	Acetaldehyde	1.25E-02	1.42E-06
BOILER5		107-02-8	Acrolein	7.82E-03	8.93E-07
BOILER5		7664-41-7	Ammonia	9.27E+00	1.06E-03
BOILER5		100-41-4	Ethyl Benzene	2.75E-02	3.14E-06
BOILER5		110-54-3	Hexane	1.83E-02	2.08E-06
BOILER5		108-88-3	Toluene	1.06E-01	1.21E-05
BOILER5		1330-20-7	Xylene	7.88E-02	9.00E-06
BOILER6		Boiler #6	71-43-2	Benzene	2.32E-02
BOILER6	50-00-0		Formaldehyde	4.93E-02	5.62E-06
BOILER6	1151		Total PAHs [excluding naphthalene]	2.90E-04	3.31E-08
BOILER6	91-20-3		Naphthalene	8.69E-04	9.92E-08
BOILER6	75-07-0		Acetaldehyde	1.25E-02	1.42E-06
BOILER6	107-02-8		Acrolein	7.82E-03	8.93E-07
BOILER6	7664-41-7		Ammonia	9.27E+00	1.06E-03
BOILER6	100-41-4		Ethyl Benzene	2.75E-02	3.14E-06
BOILER6	110-54-3		Hexane	1.83E-02	2.08E-06
BOILER6	108-88-3		Toluene	1.06E-01	1.21E-05
BOILER6	1330-20-7		Xylene	7.88E-02	9.00E-06

Table ES-1: TAC Emissions by Source					
Source ID	Source Description	Compound		Annual Emissions	Hourly Emissions
		CAS Number / Pollutant ID	Name	lb/year	lb/hr
BOILER7	Boiler #7	71-43-2	Benzene	2.32E-02	2.65E-06
BOILER7		50-00-0	Formaldehyde	4.93E-02	5.62E-06
BOILER7		1151	Total PAHs [excluding naphthalene]	2.90E-04	3.31E-08
BOILER7		91-20-3	Naphthalene	8.69E-04	9.92E-08
BOILER7		75-07-0	Acetaldehyde	1.25E-02	1.42E-06
BOILER7		107-02-8	Acrolein	7.82E-03	8.93E-07
BOILER7		7664-41-7	Ammonia	9.27E+00	1.06E-03
BOILER7		100-41-4	Ethyl Benzene	2.75E-02	3.14E-06
BOILER7		110-54-3	Hexane	1.83E-02	2.08E-06
BOILER7		108-88-3	Toluene	1.06E-01	1.21E-05
BOILER7		1330-20-7	Xylene	7.88E-02	9.00E-06
ABATOR		Abator, R-G47352	71-43-2	Benzene	1.72E-01
ABATOR	50-00-0		Formaldehyde	3.65E-01	4.16E-05
ABATOR	1151		Total PAHs [excluding naphthalene]	2.14E-03	2.45E-07
ABATOR	91-20-3		Naphthalene	6.43E-03	7.34E-07
ABATOR	75-07-0		Acetaldehyde	9.22E-02	1.05E-05
ABATOR	107-02-8		Acrolein	5.79E-02	6.61E-06
ABATOR	7664-41-7		Ammonia	6.86E+01	7.83E-03
ABATOR	100-41-4		Ethyl Benzene	2.04E-01	2.33E-05
ABATOR	110-54-3		Hexane	1.35E-01	1.54E-05
ABATOR	108-88-3		Toluene	7.85E-01	8.96E-05
ABATOR	1330-20-7		Xylene	5.83E-01	6.66E-05


Table ES-1: TAC Emissions by Source					
Source ID	Source Description	Compound		Annual Emissions	Hourly Emissions
		CAS Number / Pollutant ID	Name	lb/year	lb/hr
ABATOR	Abator, R-G47352	75-21-8	Ethylene oxide	8.45+00	9.65E-04
SCRUBBER	Scrubber, F98585	75-21-8	Ethylene oxide	7.30E+01	8.34E-03
CATOX	Catalytic Oxidizer, G52334	71-43-2	Benzene	1.76E-01	2.01E-05
CATOX		50-00-0	Formaldehyde	3.74E-01	4.27E-05
CATOX		1151	Total PAHs [excluding naphthalene]	2.20E-03	2.51E-07
CATOX		91-20-3	Naphthalene	6.61E-03	7.54E-07
CATOX		75-07-0	Acetaldehyde	9.47E-02	1.08E-05
CATOX		107-02-8	Acrolein	5.95E-02	6.79E-06
CATOX		7664-41-7	Ammonia	7.05E+01	8.05E-03
CATOX		100-41-4	Ethyl Benzene	2.09E-01	2.39E-05
CATOX		110-54-3	Hexane	1.39E-01	1.58E-05
CATOX		108-88-3	Toluene	8.06E-01	9.20E-05
CATOX		1330-20-7	Xylene	5.99E-01	6.84E-05
CATOX		75-21-8	Ethylene oxide	8.76E+00	1.00E-03
FUG		Fugitive Emissions	75-21-8	Ethylene oxide	3.82E+03
ICE	ICE Emergency Generator	71-43-2	Benzene	4.66E-03	5.32E-07
ICE		106-99-0	1,3-Butadiene	5.44E-03	6.20E-07
ICE		7440-43-9	Cadmium	3.75E-05	4.28E-09
ICE		50-00-0	Formaldehyde	4.32E-02	4.93E-06
ICE		18540-29-9	Hexavalent chromium	2.50E-06	2.85E-10
ICE		7440-38-2	Arsenic	4.00E-05	4.57E-09

Table ES-1: TAC Emissions by Source					
Source ID	Source Description	Compound		Annual Emissions	Hourly Emissions
		CAS Number / Pollutant ID	Name	lb/year	lb/hr
ICE	ICE Emergency Generator	7439-92-1	Lead	2.08E-04	2.37E-08
ICE		7440-02-0	Nickel	9.75E-05	1.11E-08
ICE		91-20-3	Naphthalene	4.93E-04	5.62E-08
ICE		1151	Total PAHs [excluding naphthalene]	9.05E-04	1.03E-07
ICE		75-07-0	Acetaldehyde	1.96E-02	2.24E-06
ICE		107-02-8	Acrolein	8.48E-04	9.67E-08
ICE		7664-41-7	Ammonia	2.00E-02	2.28E-06
ICE		7440-50-8	Copper	1.03E-04	1.17E-08
ICE		100-41-4	Ethyl Benzene	2.73E-04	3.11E-08
ICE		110-54-3	Hexane	6.73E-04	7.68E-08
ICE		7647-01-0	Hydrogen Chloride	4.66E-03	5.32E-07
ICE		7439-96-5	Manganese	7.75E-05	8.85E-09
ICE		7439-97-6	Mercury	5.00E-05	5.71E-09
ICE		7782-49-2	Selenium	5.50E-05	6.28E-09
ICE		108-88-3	Toluene	2.64E-03	3.01E-07
ICE		1330-20-7	Xylenes	1.06E-03	1.21E-07
ICE	9901	Diesel exhaust particulates	8.38E-01	9.56E-05	

Table ES-2: Exposure Pathway and Target Organ by TAC

Chemical	CAS Number / Pollutant ID	Pathways					Acute Target Organs							Chronic Target Organs								8hr Chronic Target Organs Target Organs											
		Inhalation	Soil Ingestion	Dermal	Homegrown Produce	Mother's Milk Ingestion	Cardiovascular	Central Nervous System	Immune	Reproductive Development	Respiratory	Eye	Blood	Cardiovascular	Central Nervous System	Kidney	GILV	Reproductive Development	Respiratory	Skin	Eye	Endocrine	BLOOD	Cardiovascular	Central Nervous System	Immune	Kidney	Reproductive Development	Respiratory	Skin	Blood	Eye	
Manganese	7439965	X												X											X								
Mercury	7439976	X	X	X	X		X		X					X	X		X								X		X	X					
Naphthalene	91203	X																X															
Nickel	7440020	X	X	X	X			X									X	X				X			X								
PAHs-w/o	1151	X	X	X	X	X																											
Selenium	7782492	X											X	X		X																	
Toluene	108883	X					X			X	X									X													X
Xylenes	1330207	X					X			X	X			X				X		X													

Table ES-3: Summary of Health Risk			
Location	UTM x (m)	UTM y (m)	2021 HRA
<i>Cancer Risk (chances in-one-million)</i>			
Point of Maximum Impact – Residential Exposure Scenario (PMI-R)	449,423.84	3,768,704.09	6831.5
Maximally Exposed Individual Resident (MEIR)	453,640.00	3,769,024.00	2.3
Point of Maximum Impact – Worker Exposure Scenario (PMI-W)	449,423.84	3,768,704.09	568.0
Maximally Exposed Individual Worker (MEIW)	449,423.84	3,768,704.09	568.0
Maximally Exposed Individual Sensitive Receptor (MEISR)	448,390.00.00	3,767,524.00	6.6
<i>Chronic Hazard Index</i>			
Point of Maximum Impact (PMI)	449,423.84	3,768,704.09	1.09
Maximally Exposed Individual Resident (MEIR)	453,640.00	3,769,024.00	<0.01
Maximally Exposed Individual Worker (MEIW)	449423.84	3768704.09	1.09
Maximally Exposed Individual Sensitive Receptor (MEISR)	448,390.00	3,767,524.00	<0.01
<i>8-Hour Chronic Hazard Index</i>			
Point of Maximum Impact (PMI)	449,344.72	3,768,650.38	<0.01
Maximally Exposed Individual Worker (MEIW)	449,344.72	3,768,650.38	<0.01
<i>Acute Hazard Index</i>			
Point of Maximum Impact (PMI)	449,282.55	3,768,755.80	<0.01
Maximally Exposed Individual Resident (MEIR)	448,390.00	3,771,024.00	<0.01
Maximally Exposed Individual Worker (MEIW)	449,282.55	3,768,755.80	<0.01
Maximally Exposed Individual Sensitive Receptor (MEISR)	449,338.50	3,769,813.00	<0.01

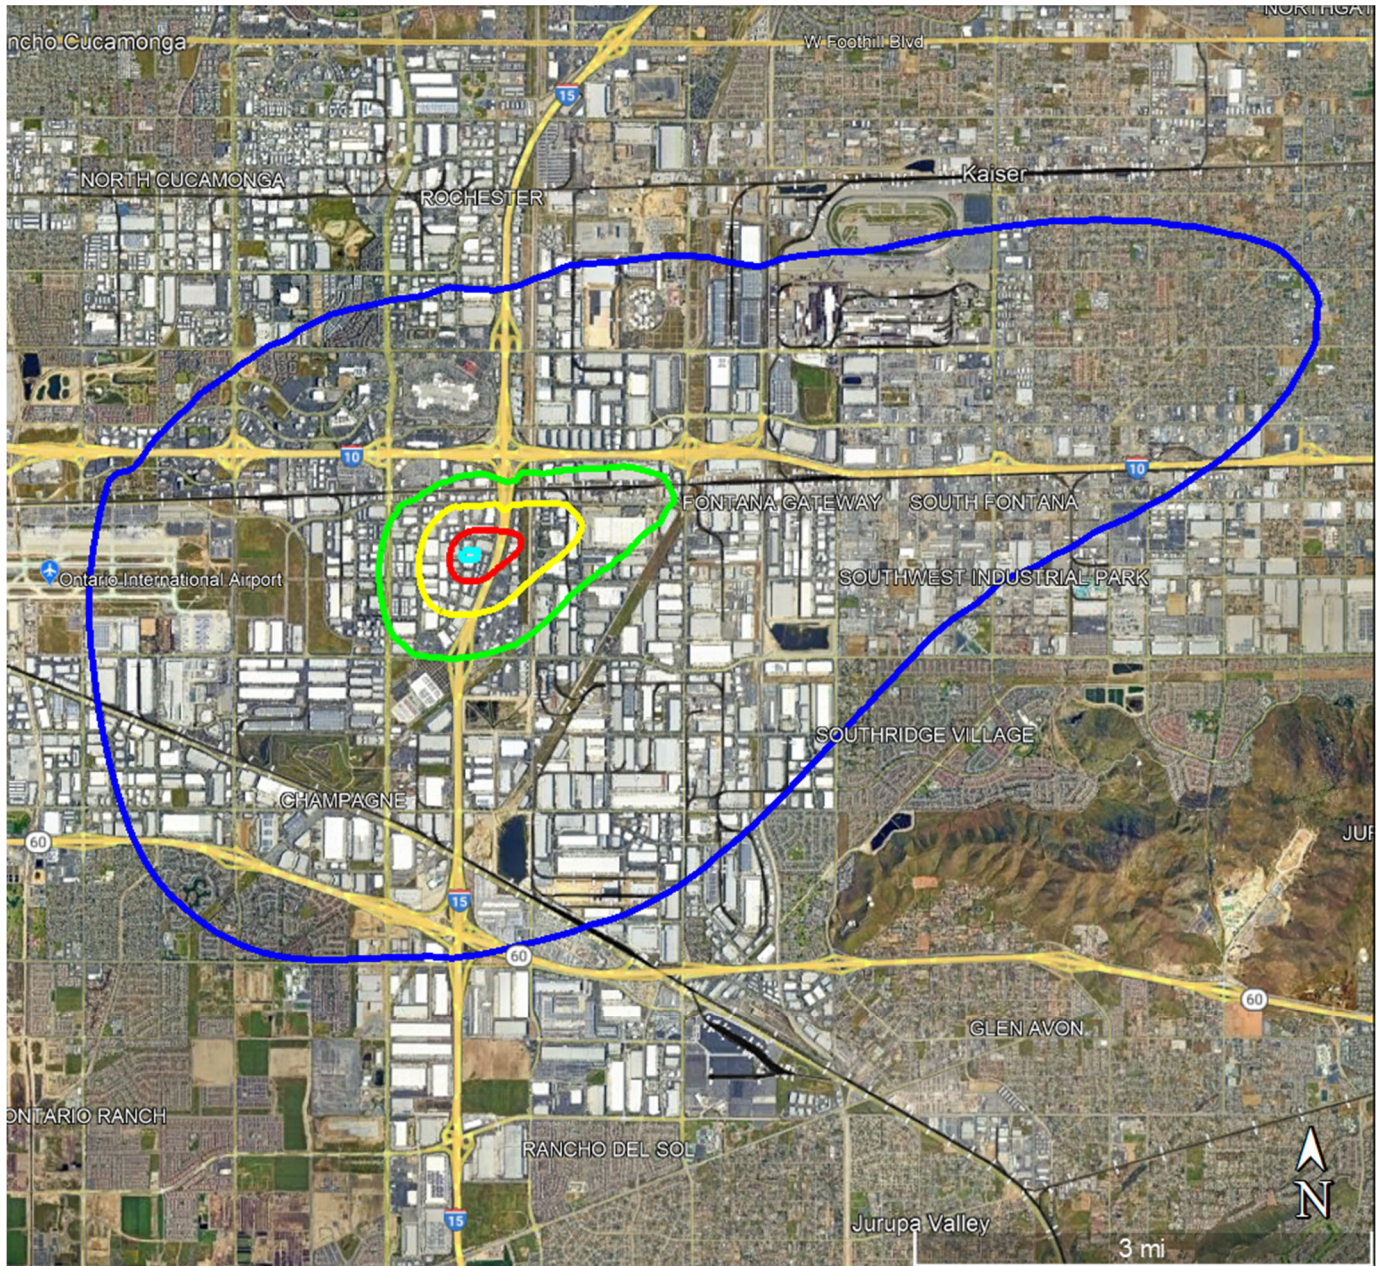






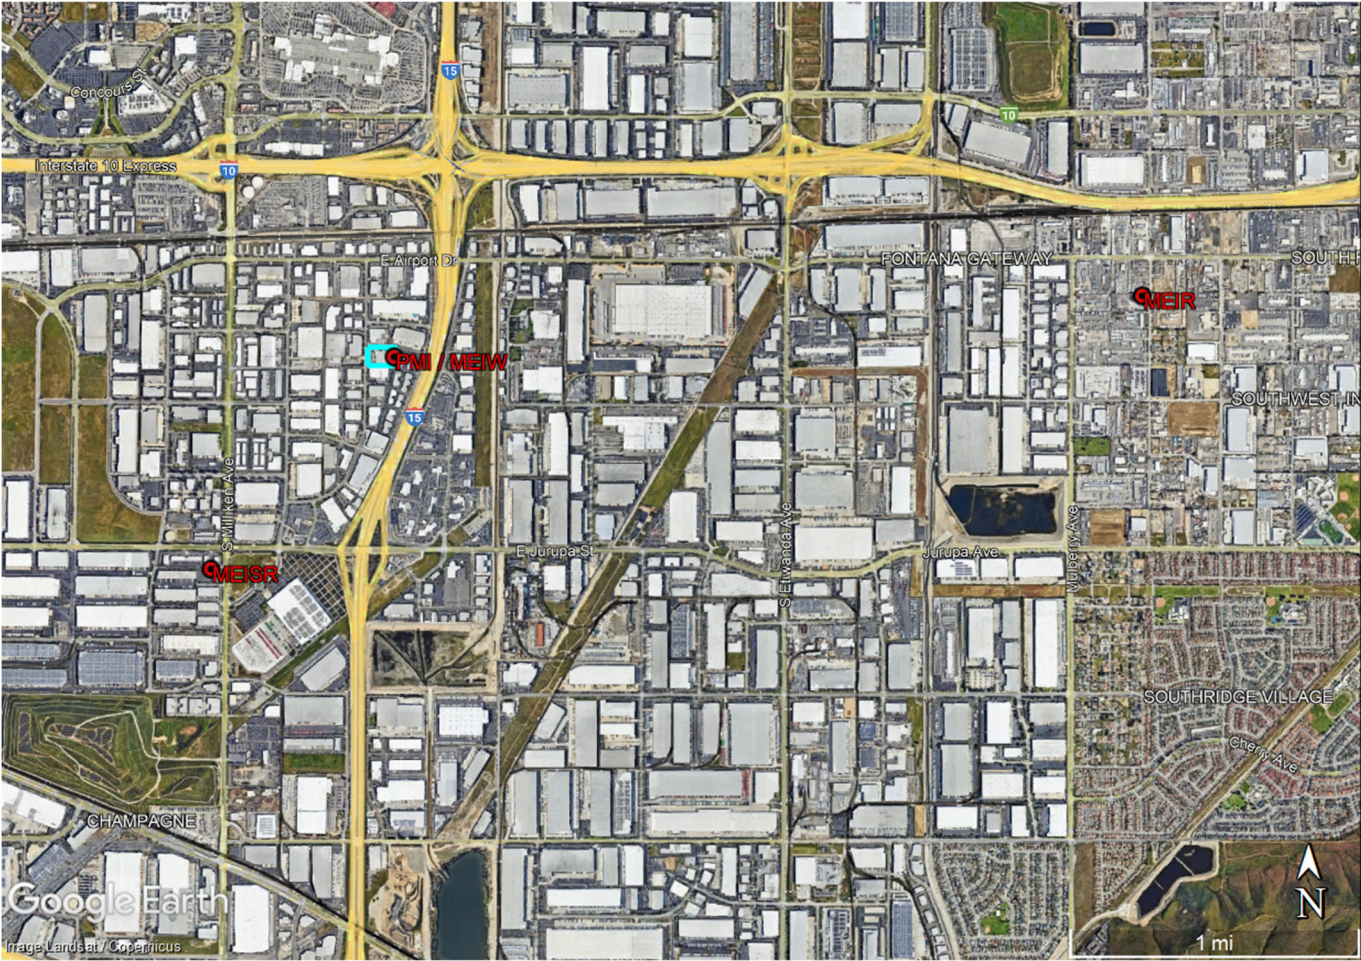
-  Facility Boundary
-  1 chance in-one-million Cancer Risk
-  10 chances in-one-million Cancer Risk
-  25 chances in-one-million Cancer Risk
-  100 chances in-one-million Cancer Risk


Figure ES-1:
Residential Cancer Isopleths
(30-Year Exposure)



Facility Boundary

Figure ES-2:


Locations of PMI, MEIR, MEIW and MEISR
for Cancer Risk

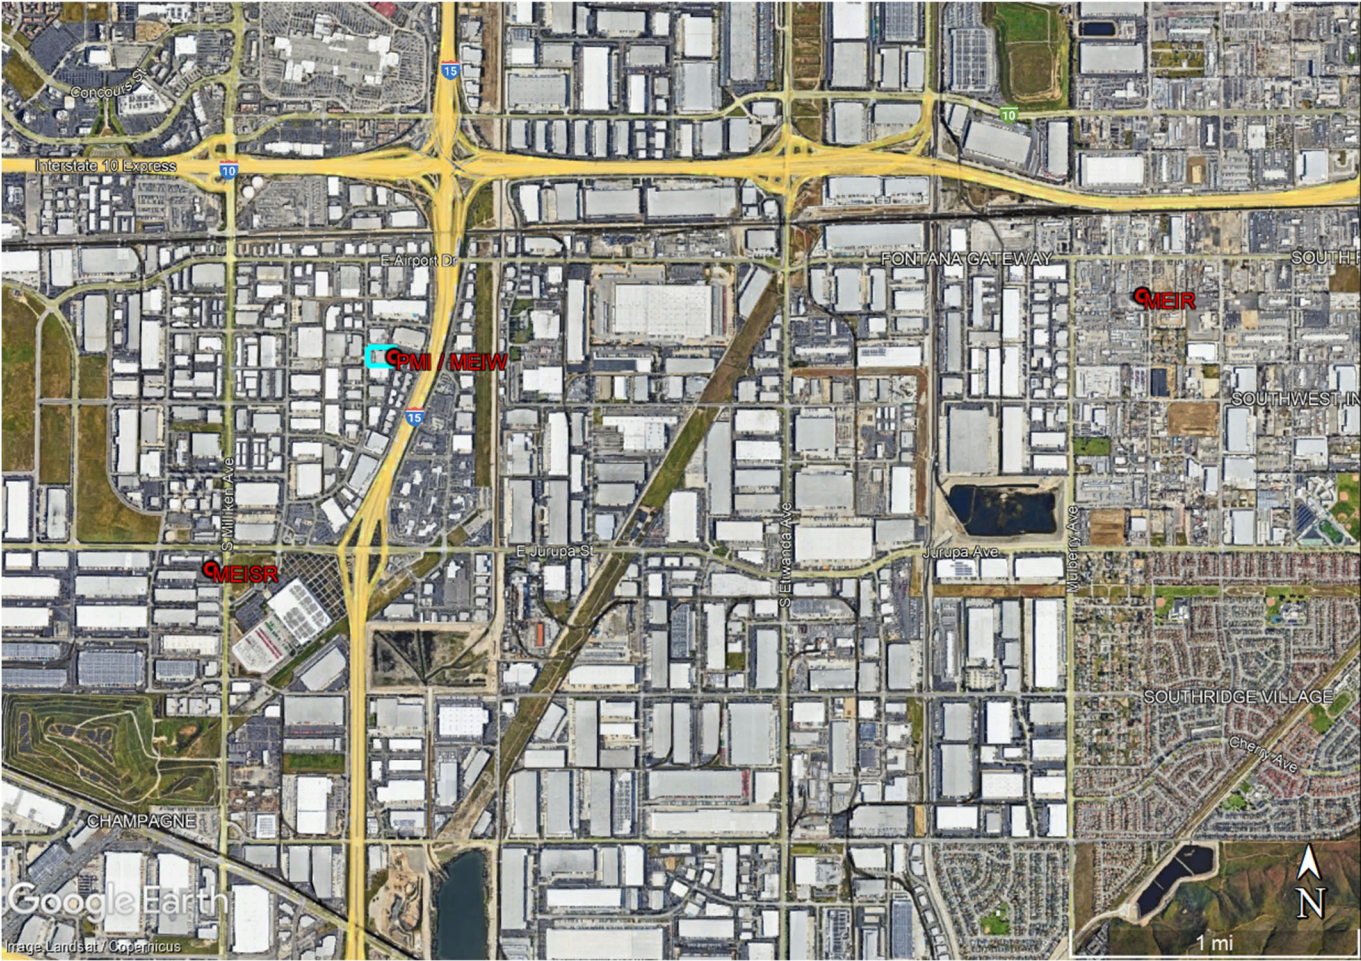

 Facility Boundary

Figure ES-3:


**Locations of PMI, MEIR, MEIW and MEISR
for Chronic Hazard Index**

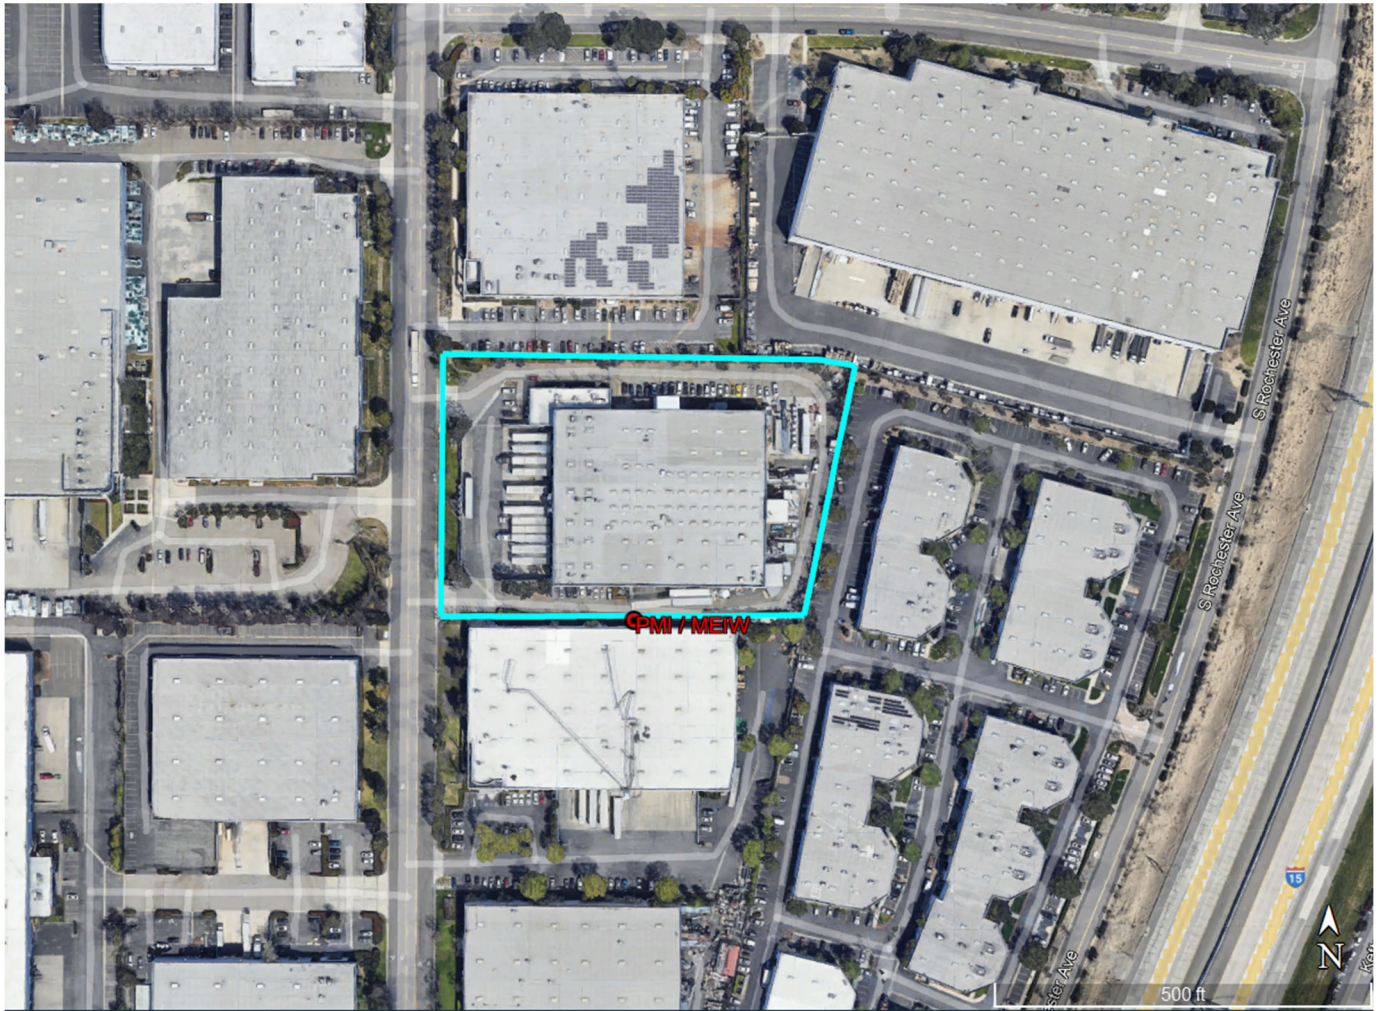

 Facility Boundary

Figure ES-4:

**Locations of PMI and MEIW
for 8-HR Chronic Hazard Index**

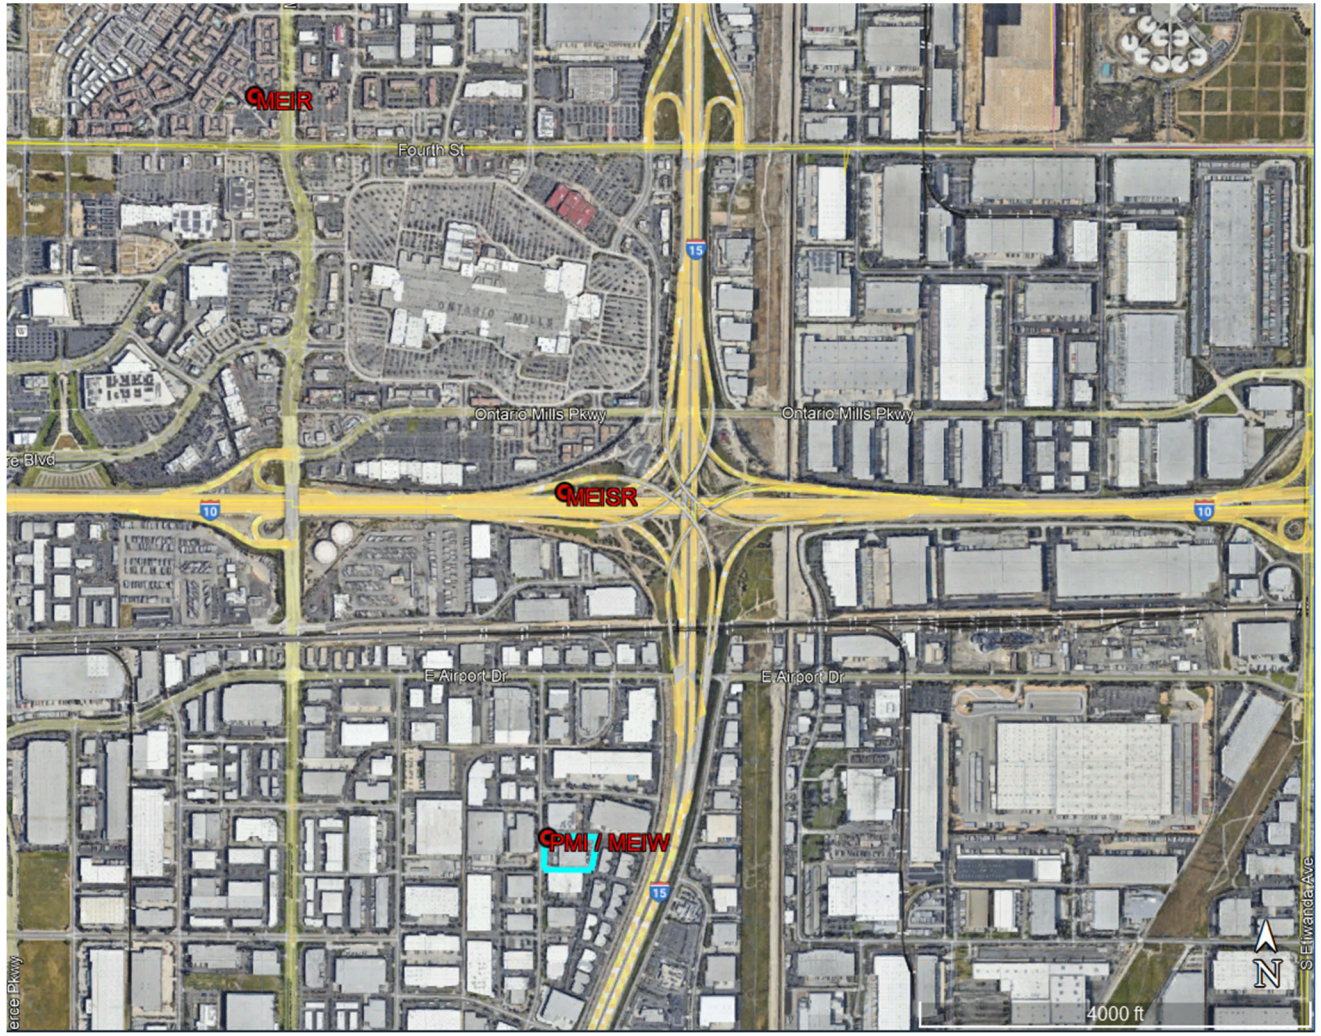


 Facility Boundary

Figure ES-5:

**Locations of PMI, MEIR, MEIW and MEISR
for Acute Hazard Index**

HEALTH RISK ASSESSMENT SUMMARY FORM



South Coast Air Quality Management District
 21865 Copley Drive, Diamond Bar, CA 91765-4182
 (909) 396-2000 • www.aqmd.gov

HEALTH RISK ASSESSMENT SUMMARY FORM

(Required in Executive Summary of HRA)

Facility Name : Sterigenics US, LLC
 Facility Address: 687 Wanamaker Ave
Ontario, CA 91710
 Type of Business: Medical Sterilization
 SCAQMD ID No.: 126060

A. Cancer Risk

(One in a million means one chance in a million of getting cancer from being constantly exposed to a certain level of a chemical over a period of time)

1. Inventory Reporting Year : 2021
2. Maximum Cancer Risk to Receptors : *(Offsite and residence = 30-year exposure, worker = 25-year exposure)*

a. Offsite	<u>6,831.5</u>	in a million	Location:	<u>449,423.84 m E, 3,768,704.09 m N</u>
b. Residence	<u>2.3</u>	in a million	Location:	<u>453,640 m E, 3,769,024 m N</u>
c. Worker	<u>568.0</u>	in a million	Location:	<u>449,423.84 m E, 3,768,704.09 m N</u>
3. Substances Accounting for 90% of Cancer Risk: Ethylene Oxide
 Processes Accounting for 90% of Cancer Risk: Fugitive Emissions
4. Cancer Burden for a 70-yr exposure: *(Cancer Burden = [cancer risk] x [# of people exposed to specific cancer risk])*

a. Cancer Burden	<u>0.05</u>
b. Number of people exposed to >1 per million cancer risk for a 70-yr exposure	<u>33,008</u>
c. Maximum distance to edge of 70-year, 1×10^{-6} cancer risk isopleth (meters)	<u>9,340</u>

B. Hazard Indices

*[Long Term Effects (chronic) and Short Term Effects (acute)]
 (non-carcinogenic impacts are estimated by comparing calculated concentration to identified Reference Exposure Levels, and expressing this comparison in terms of a "Hazard Index")*

1. Maximum Chronic Hazard Indices:

a. Residence HI:	<u>0.00</u>	Location:	<u>453,640 m E, 3,769,024 m N</u>	toxicological endpoint:	<u>Central Nervous System</u>
b. Worker HI:	<u>1.09</u>	Location:	<u>449,423.84 m E, 3,768,704.09 m N</u>	toxicological endpoint:	<u>Central Nervous System</u>
2. Substances Accounting for 90% of Chronic Hazard Index: Ethylene Oxide
3. Maximum 8-hour Chronic Hazard Index:

8-Hour Chronic HI:	<u>0.00</u>	Location:	<u>449,344.72 m E, 3,768,650.30 m N</u>	toxicological endpoint:	<u>Respiratory System</u>
--------------------	-------------	-----------	---	-------------------------	---------------------------
4. Substances Accounting for 90% of 8-hour Chronic Hazard Index: Acrolein and Formaldehyde
5. Maximum Acute Hazard Index:

PMI:	<u>0.00</u>	Location:	<u>449,282.55 m E, 3,768,755.00 m N</u>	toxicological endpoint:	<u>Eyes</u>
------	-------------	-----------	---	-------------------------	-------------
6. Substances Accounting for 90% of Acute Hazard Index: Acrolein, Ammonia and Formaldehyde

C. Public Notification and Risk Reduction

1. Public Notification Required? Yes No
 a. If 'Yes', estimated population exposed to risks > 10 in a million for a 30-year exposure, or an HI > 1
0 residents
2. Risk Reduction Required? Yes No

1. INTRODUCTION

1.1 Background

At the direction of the South Coast Air Quality Management District (South Coast AQMD or "the District"), a revised Air Toxics Health Risk Assessment ("Revised 2021 HRA") Report based on the 2021 Toxic Air Contaminants (TACs) emission inventory for the Sterigenics U.S., LLC (Sterigenics of "Facility", South Coast AQMD Facility ID 126060) is being submitted on behalf of Sterigenics, located at 687 Wanamaker Avenue in Ontario, California. In accordance with the State of California's Air Toxics "Hot Spots" Information Act (AB2588), Sterigenics previously submitted an AB2588 HRA to South Coast AQMD on March 28, 2023 ("Original 2021 HRA"). South Coast AQMD rejected the Sterigenics Original 2021 HRA in a letter dated October 31, 2023. In response, a Revised 2021 HRA was prepared to address South Coast AQMD's comments on the Original 2021 HRA. The revised report was then modified by the South Coast AQMD to address deficiencies ("Modified 2021 HRA"). This modified report follows relevant AB2588 HRA guidance from Office of Environmental Health Hazard Assessment (OEHHA) and South Coast AQMD, and the United States Environmental Protection Agency (USEPA) guidelines for air dispersion modeling.

1.2 Health Risk Assessment Format and Definitions

For the purpose of this AB2588 HRA, acute, chronic, and cancer health impacts are defined as follows:

- Acute risks are non-cancer adverse health impacts, commonly associated with exposures to relatively high concentrations of TACs over short periods of time, from minutes to hours. Acute exposure typically results in headaches, dizziness, nausea, eye/nose/throat irritation, and/or skin rash. Each toxic chemical may affect the body through different mechanisms. Target organs for each TAC have been identified by OEHHA in its guidance document.
- Chronic risks are non-cancer adverse health impacts, commonly associated with exposures to relatively low concentrations of TACs over long periods of time, as in several years. Typical symptoms of chronic exposure include persistent respiratory or digestive problems, chronic cough, chest pains, numbness or tingling, loss of smell or taste, etc. As with acute risks, the target organs due to chronic risks that will be analyzed in this HRA may affect the body through different mechanisms and have been identified by OEHHA (OEHHA, 2015).
- Eight-Hour chronic risks non-cancer adverse health impacts, commonly associated with exposures on a recurrent basis but only during a portion of each day. The target organs due to 8-hour chronic risks that will be analyzed in this HRA may affect the body through different mechanisms and have been identified by OEHHA (OEHHA, 2015).
- Cancer is defined as the abnormal or irregular growth of cells or tissue. There are many triggers that may cause or increase the risk of cancer, including exposure to certain chemicals or TACs. The increased risk of cancer from exposure to a chemical means the additional risk of getting cancer from continuous exposure (i.e., 30 years and 365 days per year) to potentially cancer-causing compounds. Cancer risk is usually expressed as a probability (e.g., ten excess chances of contracting cancer in one million exposed individuals).

In general, this AB2588 HRA provides conservative estimates of the probabilities for contracting adverse health effects due to the processes occurring at the facility. A

“conservative” estimate assumes that the worst-case exposure conditions exist so that the health effects are not underestimated.

1.3 Significance Criteria and Notification Levels

Under AB2588, the operator of a facility must provide notices to all exposed persons if the facility’s health risk assessment indicates that there is a significant health risk associated with the air toxic emissions from the facility. The South Coast AQMD’s public notification thresholds are as follows:

- Greater than or equal to 10 maximum individual (lifetime) cancer risk (MICR),
- Greater than 1.0 Hazard Index Acute (HIA), or
- Greater than 1.0 Hazard Index Chronic (HIC).

The operator is also required to implement risk reduction measures if the emissions from the facility cause an exceedance of any of the following Action Risk Levels in South Coast AQMD Rule 1402:

- MICR of twenty-five chances in-one-million,
- Cancer burden of 0.5, or
- Total HIA or HIC of three (3.0) for any target organ system at any receptor location.

South Coast AQMD Rule 1402 also establishes significant risk levels; facilities above these levels are required to submit a risk reduction plan, as well as expedited actions to implement the Risk Reduction Plan:

- MICR of 100 chances in-one-million, or
- Total HIA or HIC of five (5.0) for any target organ system at any receptor location.

1.4 Objectives

Consistent with AB2588 requirements, the objective of this HRA report is to estimate potential risks to human populations in the vicinity of the Facility that may be exposed to potential operational emissions. At the direction of South Coast AQMD staff, potential operational emissions were modeled based on 2021 Facility operations.

The methodologies used to complete the 2021 HRA are based on the District-approved Office of Environmental Health Hazard Assessment (OEHHA) of Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessments (“OEHHA Guidance,” OEHHA 2015) as well as the South Coast AQMD Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics “Hot Spots” Information and Assessment Act (AB2588) (“South Coast AQMD Supplemental Guidelines,” South Coast AQMD 2020).

As prescribed in the OEHHA Guidance, the Hotspots Analysis Reporting Program (HARP) model was used to estimate the potential impacts to human health in the vicinity of the Facility. Dispersion of potential emissions attributable to the Facility was modeled using the American Meteorological Society/Environmental Protection Agency regulatory air dispersion model (AERMOD version 23123). The results from AERMOD were imported into the Risk Analysis module of HARP2, developed by the California Air Resources Board (ARB), to

calculate the potential cancer risk¹, potential chronic non-cancer hazard index (HI), and potential acute HI at an array of receptors.

This report includes the sections corresponding to the sections in South Coast AQMD's HRA outline contained in Appendix B of the South Coast AQMD Supplemental Guidelines as follows:

- Table of Content corresponds to Section I in South Coast AQMD guidelines
- Executive Summary corresponds to Section II in South Coast AQMD guidelines
- Section 2 Hazard Identification corresponds to Section III.A in South Coast AQMD guidelines
- Section 2.1 Facility Location and Process Description corresponds to Section III.B.1 in South Coast AQMD guidelines
- Section 2.3 Quantification of Emissions corresponds to Section III.B.2 in South Coast AQMD guidelines
- Section 3.1 Air Dispersion Modeling corresponds to Section III.B.3 in South Coast AQMD guidelines
- Section 3.3 Source Parameters and Operating Schedule corresponds to III.B.2 in South Coast AQMD guidelines
- Sections 4, 5, 7, and 8 Risk Assessment Procedures correspond to III.C in South Coast AQMD guidelines
- Section 9 References corresponds to III.D in South Coast AQMD guidelines

¹ Cancer risks evaluated in the Modified 2021 HRA refer to the calculated excess theoretical cancer risk due to potential emissions at the Facility, as required by OEHHA and South Coast AQMD guidance documents.

2. HAZARD IDENTIFICATION

2.1 Site Description and Facility Operations

Sterigenics Ontario (Facility ID 126060) is a sterilization plant located in the city of Ontario at 687 Wanamaker Avenue. **Figure 1** shows the facility location and its vicinity. The land use in the immediate vicinity of the facility is primarily industrial or commercial urban area with the nearest residential neighborhood approximately 2,200 meters to the northwest of the facility, on the northwest corner of Fourth Street and Milliken Avenue in Rancho Cucamonga. The topography around the facility is generally flat. The facility's layout showing the locations of the various buildings and the emission sources is included as **Figure 2**. As recommended in the South Coast AQMD Supplemental Guidelines and the South Coast AQMD Modeling Guidance for AERMOD (South Coast AQMD, 2022), the urban dispersion option was used with a population of 2,035,210, based on the population of San Bernardino County.²

Due to its location in an urbanized area with no drinking water reservoirs within the zone of influence, exposure to TACs from the Facility was estimated for the inhalation, dermal, soil ingestion, home-grown produce, and mother's milk pathways.³ The input parameters for each pathway are further discussed in Section 4.1.

Sterigenics operates a medical sterilization business. As a contract sterilization facility, the Ontario facility sterilizes medical devices such as surgical kits, medical hardware, gowns and drapes, surgical accessories, and medical packaging using ethylene oxide (EtO). Potential onsite sources of emissions include the vacuum chambers controlled by the scrubbers, backvents and aeration rooms controlled by the catalytic oxidizers, fugitive emissions from the building and in the outdoor process areas, and natural gas boilers, and a diesel-fueled emergency generator.

2.2 Ethylene Oxide Monitoring

South Coast AQMD began ambient monitoring of EtO in the vicinity of the Facility in June 2022⁴. The 24-hour air monitoring results show the combined concentration due to facility emissions and background levels of EtO. The locations of the EtO monitoring sites are depicted on **Figure HI-1** below. Data collected from South Coast AQMD's regional monitor located in Rubidoux, well outside the zone of influence of the facility, show that background levels of EtO measured in the ambient air range from 0.02 to 0.14 ppb.

² South Coast AQMD Modeling Guidance for AERMOD, available at: <http://www.aqmd.gov/home/air-quality/meteorological-data/modeling-guidance>. Accessed: March 2023.

³ Home-grown produce and mother's milk pathways are only applicable to potential residential exposures.


⁴ Available at: <https://www.aqmd.gov/home/news-events/community-investigations/sterigenics-ontario>. Accessed: March 2023.

Figure HI-1: Map of South Coast AQMD’s EtO Monitoring Sites



Sterigenics has undergone significant and sustainable operational and procedural changes to reduce both point source and potential fugitive EtO emissions and corresponding concentrations. This trend can be seen in **Figure HI-2** below, which shows average monthly results, including days during which the facility was not operating, calculated based on the South Coast AQMD’s 24-hour average EtO concentrations sampled at the Ontario Gateway Business Center Site 1B, beginning in August 2022.


Figure HI-2: EtO Monthly Monitoring Trends

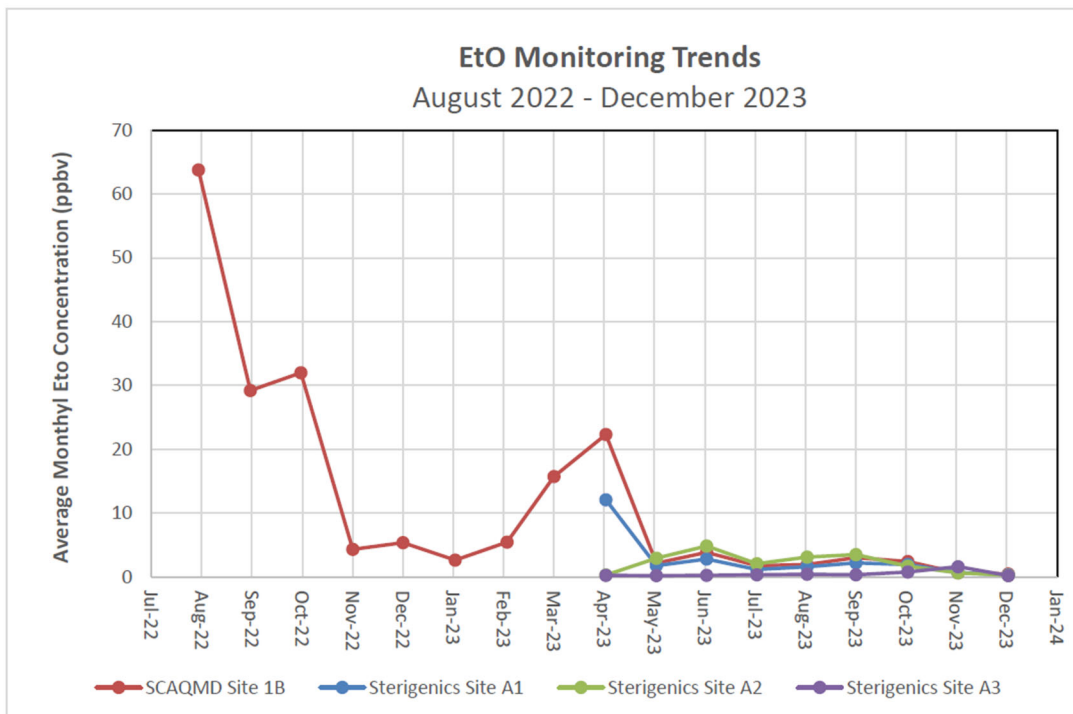

As can be seen from this figure, EtO concentrations in the industrial/commercial area in the immediate vicinity of the facility measured in December 2023 have dropped by over 99% on average since August 2022. Further, as part of the EARP, Sterigenics has been conducting routine fence-line monitoring and will take appropriate actions when elevated EtO concentrations are detected to protect public health.

The monitored levels around Sterigenics, although trending downward, did at times exceed concentrations that would correspond to South Coast AQMD’s Significant Risk threshold of 100 chances in-one-million. For off-site workers, cancer risks of 100 chances in-one-million would correspond to exposure to EtO levels of 3.18 parts per billion (ppb) consistently over a 25-year period. As depicted in **Figure HI-3** below, the monitored levels around Sterigenics in non-residential areas exceed the significant risk threshold even after initial changes were made in late 2022 and early 2023 to operations and procedures in an effort to reduce emissions of EtO. For reference, the dashed red bar in the figure represents 3.18 ppb.

Figure HI-3: South Coast AQMD’s EtO Monitoring Results for Non-Residents

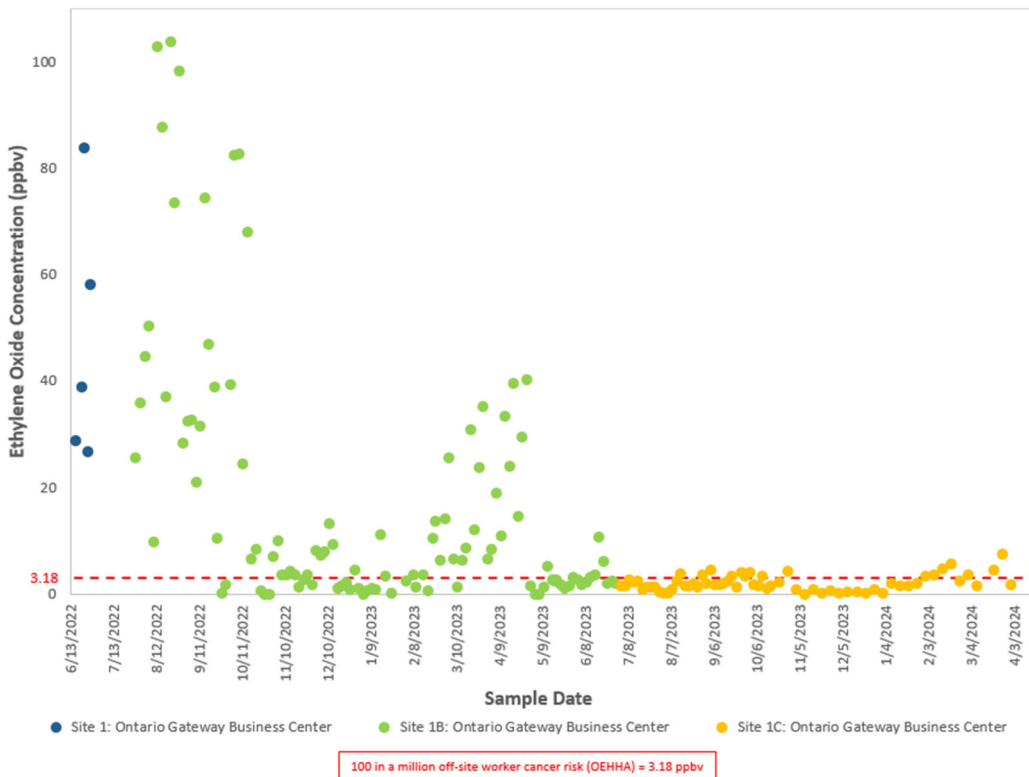

2.3 Substances Emitted and Evaluated

The list of potentially emitted substances considered in preparation of the 2021 HRA is from Appendix A-I of the California Air Resources Board (CARB) AB2588 requirements and the OEHA Guidance. The AB2588 TACs potentially emitted from the Ontario facility are shown in **Table 1**, which also includes an identification of which compounds are evaluated for cancer risk, non-cancer chronic, or non-cancer acute impacts, as well as which compounds

have non-inhalation routes of exposure.⁵ **Table 2 - Table 5** summarize the estimated 2021 annual and hourly EtO emissions by emitted source and substance.

For carcinogens, cancer potency factors (CPF) were used for computing cancer risk. For non-cancer health effects, reference exposure levels (REL) were used. The non-carcinogenic hazard indices were computed for chronic and acute exposures with their respective toxicological endpoints shown. For multipathway pollutants, oral doses, oral CPFs, and/or non-inhalation RELs were used as appropriate. Details of the risk assessment procedures used are included in Section 4.

2.4 TAC Emission Sources

Sterigenics has the following TAC emission sources from different processes. These sources were divided into two groups based on the source configuration (e.g., point, volume, or area source) used in the air dispersion model. More details on the source characterization are discussed in Section 3.2.

1. Point sources include the following:
 - Ceilcote scrubber
 - Donaldson abator
 - Pollution Systems catalytic oxidizer
 - Five natural gas boilers
 - One diesel-fueled emergency generator
2. Volume sources includes as the follows:
 - Fugitive EtO emissions

Annual and maximum hourly emissions for TACs were reported from the above ten source groups as shown in **Table 2** and **Table 4**. The emission calculation methodology and emission updates were discussed in the sections below.

2.5 Sterilization Process Emissions

Medical devices are shipped to the Ontario facility via truck. These products are unloaded, sterilized with EtO, aerated, sometimes staged for a few hours in the shipping area, then shipped out to medical facilities and customers. EtO process emissions are treated through a scrubber and two catalytic oxidizers (abators). Emissions calculations assume that 93.36% of all EtO used at the facility enters the scrubber, 4% enters the abator as process emissions via the aeration room, 1% enters the abator as process emissions via sterilizer backvents, with 0.64% released as fugitive emissions from the facility. For purposes of this HRA, the EPA methodology was refined based on site-specific configurations. An estimated 0.44% of the total EtO usage was released as fugitives, while 0.2% of the total EtO usage was routed to and controlled by the abator and/or the catalytic oxidizer. Emissions were assumed to occur 24 hours per day, 7 days per week.

The Ontario facility operates nine sterilization chambers (P/O G45325, G45324, G45323, G45322, G45321, G45320, G45319, G45310, and G53770). Calculations assume 2021 usage of EtO was distributed evenly amongst the sterilization chambers. Exhaust from these sterilizer vacuum pumps is treated by a scrubber (P/O F98585). A source test conducted on

⁵ All potential non-inhalation pathways are listed in Table 1.

this scrubber on July 8, 2022 showed that the scrubber controls 99.991% of the emissions from these sterilizers. The remaining 0.009% of all EtO processed by these sterilizers and sent to the scrubber is emitted.

Emissions from the sterilization chamber back vents and aeration rooms (P/O G30731 and G44856) are controlled via an abator (P/O R-G47352) and catalytic oxidizer (P/O G52334). The emissions controlled by the abator and catalytic oxidizer were scaled based on the flow rate of each piece of control equipment. A source test conducted on this control equipment on October 29, 2021 showed that the abator and catalytic oxidizer have a control efficiency of 99.96% for the aeration rooms and 99.96% and 99.98% for the backvents, respectively. The remaining 0.04% of all EtO entering the abator via the aeration rooms and the remaining 0.03% of all EtO entering the abator via backvents is emitted.

2.6 Fugitive Emissions

Sterigenics typically estimates its fugitive emissions of ethylene oxide as 0.05% of each facility's overall ethylene oxide usage. This estimate was derived based on a study conducted in November 2018 at Sterigenics' Willowbrook, Illinois facility. However, for the 2021 Modified HRA, South Coast AQMD used the USEPA's methodology for estimating fugitive emissions from sterilizing facilities⁶ to estimate the emissions from Sterigenics, with refinements for site-specific configurations as described in Section 2.5. **Table HI-1**, below, summarizes the industry-wide average percentages of EtO emitted by each process group. This information was published by the USEPA for estimating fugitive emissions of EtO from sterilizers.

⁶ <https://www.federalregister.gov/d/2023-06676/p-243>

Table HI-1: Emissions of EtO By Process Group Per USEPA

Emission Process Group (EPG)	Industry Average Percentage of EtO Use (2019 and 2021 data)
Aeration Room Vent (ARV)	4%
Chamber Exhaust Vent (CEV)	1%
Indoor EtO Storage	Confidential Business Information
EtO Dispensing (HC)	0.1%
Vacuum Pump Operation (VP)	0.1%
Pre-Aeration Handling Sterilized Material (PR)	0.2%
Post- Aeration Handling Sterilized Material (PO)	0.2%
Non-Oxidizer APCD Area (NO)	0.04%
Sterilization Chamber Vent (SC)	93.36%

Fugitive emissions were modeled as volume sources to be as consistent as possible with known conditions of the operations in 2021. In AERMOD, volume sources must be entered as squares, so multiple square sources were used to approximate a building opening and outdoor area around the scrubber. Fugitive emissions from the "Non-Oxidizer APCD Area" was assigned to the volume source around the scrubber and all other fugitive emission groups were assigned to the remaining volume source.

2.7 Combustion Source Emissions

The Sterigenics Ontario facility operates various pieces of combustion equipment as follows:

- Five permit-exempt natural gas fired boilers, each rated at 1.995 MMBtu/hr.
- One natural gas fired abator, rated at 4.5 MMBtu/hr (Permit to Operate (P/O) R-G47352 and G52334).
- One natural gas fired catalytic oxidizer, rated at 4.5 MMBtu/hr (P/O G52334).
- One diesel fired emergency generator, rated at 128 brake horsepower (P/O F37957).

Emissions for the ATIR are calculated using natural gas and diesel usage obtained from the facility 2021 annual emissions reports (AER).

Consistent with the emissions for the ATIR, TAC emissions were estimated from combustion equipment using fuel usage obtained from the facility 2021 annual emissions reports (AER) and South Coast AQMD AB2588 reporting procedures default emission factors for natural gas-fired external combustion equipment with equipment ratings less than 10 MMBtu/hr

without selective catalytic reduction (SCR) or selective non-catalytic reduction (SNCR) and diesel fired stationary and portable internal combustion engines without SCR or SNCR.⁷

⁷ Reporting Procedures for AB2588 Facilities Reporting their Quadrennial Air Toxic Emission Inventory in the Annual Emission Reporting Program. Available: <http://www.aqmd.gov/docs/default-source/planning/annual-emission-reporting/supplemental-instructions-for-ab2588-facilities.pdf>.

3. EXPOSURE ASSESSMENT

3.1 Air Dispersion Modeling

AERMOD (version 23132) and the meteorological data processed by the South Coast AQMD were used to estimate ambient concentrations resulting from the TAC emissions from Sterigenics Ontario facility. The air dispersion analysis was performed in accordance with OEHHA Guidance, the South Coast AQMD Supplemental Guidelines, and SCAQMD Modeling Guidance for AERMOD. The results of the air dispersion analysis were used in conjunction with the chemical-specific emissions rates discussed above to estimate potential ambient air concentrations of each compound using Air Dispersion Modeling and Risk Tool (ADMRT) module in HARP developed by ARB.⁸

The air dispersion analysis requires the following: identification of source parameters and operating schedules, evaluation of building downwash effects, preparation of meteorological data, evaluation of potential terrain considerations, selection of appropriate dispersion coefficients based on land use, selection of receptor locations, and selection of appropriate averaging time periods. The following sections describe each of these steps.

Appendix A provide electronic files related to the air dispersion modeling analysis.

3.2 Source Characterization

AERMOD requires source-specific parameters such as stack height, stack inside diameter, exit velocity, and stack gas temperature. **Table 6** presents the AERMOD model options and inputs for the Modified 2021 HRA.

Three different representations of emission sources are used in the air dispersion model:

- Point sources;
- Area sources; and
- Volume sources.

Point sources are used to represent those emissions that have single identifiable points of release. A typical point source will have a stack with a defined location. Other sources, however, do not have a single, discrete point of release. Sources that can be reasonably represented as emitting at a uniform rate over a two-dimensional surface are modeled as area sources. Sources that can be reasonably represented as emitting at a uniform rate from a three-dimensional space are modeled as volume sources. **Table 7** and **Table 8** summarize the source parameters in the AERMOD model for modeled point and volume TAC emission sources, respectively.

Figure 2 shows the modeled TAC emission sources for the Modified 2021 HRA.

3.3 Source Parameters and Operating Schedules

Combustion TAC emissions and process EtO emissions are modeled as point sources with the stack parameters from the source tests. To account for the emissions escaping from the building through the rear roll-up door of the warehouse, per the South Coast AQMD comment, fugitive EtO emissions are modeled as volume sources with a release height of one-half of the building height, as presented in **Table 9**. The locations of potential onsite

⁸ HARP is available for download at: <https://ww2.arb.ca.gov/our-work/programs/hot-spots-analysis-reporting-program>. Accessed: March 2023

sources and nearby buildings are included as **Figure 2**. Routine sources were modeled according to Sterigenics' operating schedule (24 hours per day, and 7 days per week).

3.4 Building Downwash

All the point sources at the facility are located on or near the buildings (refer to **Figure 2**). Consistent with South Coast AQMD Modeling Guidance for AERMOD, the USEPA-approved Building Profile Input Program PRIME (BPIP/PRIME) was used to simulate the building downwash, which is the effect of nearby structures on the flow of the plumes from their respective emission sources. **Figure 2** shows the buildings included and **Table 9** includes the building heights modeled in AERMOD.

3.5 Dispersion Parameters

Per the South Coast AQMD Modeling Guidance for AERMOD, the urban dispersion option was used, with a population of 2,035,210, based on the population of San Bernardino County. AERMOD was run using the regulatory default option, also per South Coast AQMD Modeling Guidance for AERMOD.

3.6 Receptor Locations

Health effect indices such as cancer risk, chronic hazard index, and acute hazard index were calculated for a variety of receptor locations. Receptors of primary interest are those at residential locations, at sensitive population locations, and at offsite worker locations. However, in order to get a more complete picture of the patterns of exposure, concentrations and risk are also calculated at regularly spaced grid points throughout the modeling domain.

As shown in **Figures 3a – 3d**, the following receptor grids with different receptor spacings were constructed for the dispersion analysis based on South Coast AQMD modeling guidance⁹:

- 20-m spacing receptor along the facility boundary;
- 50-m spacing receptor grid from the site boundary to 500 m from the facility boundary;
- 100-m spacing receptor grid from 500 m to 1,000 m from the facility boundary;
- 250-m spacing receptor grid from 1,000 m to 5,000 m from the facility boundary;
- 500-m spacing receptor grid from 5,000 m to 10,000 m from the site boundary; and
- Discrete sensitive receptors.

The grid receptor locations inside of the facility boundary are disregarded in the health risk analysis. Consistent with South Coast AQMD Modeling Guidance for AERMOD, all receptors were run with a height of 0.0 meters, so that ground-level concentrations are modeled. Sensitive receptor locations (e.g., medical facilities) as included in **Table 10** were obtained via an internet search and the Google Maps database. A total of 2,898 fence-line and grid receptors were included in the analysis, plus an additional 18 sensitive receptors, 2 discrete receptors near the South Coast AQMD monitor for a total of 2,918 receptors.

Additionally, to calculate population exposure and cancer burden, separate dispersion modeling runs were performed at receptors located at the centroid of census blocks whose centroid was located within the modeling domain. The census blocks and population values

⁹ South Coast Air Quality Management District, Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spots" Information and Assessment Act, October 2020, Table 7 and Table 8.

from the 2010 United States Census Bureau's Cartographic Boundary Files were used to create the census tract centroid receptor grid.¹⁰ A total of 3,011 census block centroid receptors were modeled as shown in **Figure 3e**.

3.7 Coordinate System

The Universal Transverse Mercator (UTM) system of coordinates and the World Geodetic System (WGS84) were used for identifying the UTM coordinates of the various modeling objects (sources, buildings, receptors etc.).

3.8 Meteorological Data

Ontario International Airport meteorological station (KONT) was selected as the most representative surface station for the facility due to its proximity to the facility. Five years of the AERMOD-ready meteorological data for KONT were downloaded from the South Coast AQMD website and used for the air dispersion modeling in the Modified 2021 HRA.¹¹ A wind rose for the KONT data from 2012 to 2016 is provided in **Figure 4**.

3.9 Terrain

Terrain data were obtained from the United States Geological Survey (USGS), with 1/3 arc-second (~10 meter) National Elevation Dataset (NED) data downloaded. Elevations and hill heights were calculated for all sources, buildings, and receptors, using AERMOD terrain preprocessor, AERMAP.

3.10 Averaging Times

Calculation of chemical concentrations for use in exposure analysis requires the selection of appropriate concentration averaging times. 1-hour and five-year (i.e., period) dispersion averaging times are used in this analysis and are discussed below. The AERMOD model input and output files used to estimate long- and short-term dispersion factors are presented as an electronic attachment in **Appendix A**.

3.10.1 Long Term

Average concentrations over the five-year span of the Ontario International Airport meteorological data were calculated for each compound for use in estimating potential residential cancer risks and chronic non-cancer health effects.

3.10.2 Short Term

Maximum short-term concentrations (one-hour averages) of the five-year period modeled were calculated using maximum hourly emission rates to estimate acute non-health effects. One-hour maximum source-specific concentrations were summed regardless of time of occurrence (i.e., hour of year), which can differ by source, thereby conservatively overestimating the true one-hour maximum at any one time.

3.11 Dispersion Factors

Both point and volume source emissions were modeled using the X/Q ("chi over q") method, such that emission source groups are input to the model with unit average annual emission rates (i.e., 1 gram per second [g/s]), and the model estimates 1-hour maximum or annual

¹⁰ Available at: <https://www.census.gov/geographies/mapping-files/time-series/geo/cartographic-boundary.2020.html#list-tab-NP83ZD75IOWNF0AYRQ>

¹¹ AERMOD-ready Meteorological Stations and Data. Available at: <https://www.aqmd.gov/home/air-quality/meteorological-data/aermod-table-1>.

average dispersion factors (with units of $[\mu\text{g}/\text{m}^3]/[\text{g}/\text{s}]$). To calculate annual average ambient air concentrations, the five-year (i.e., period) average dispersion factors were multiplied by the annual emission rates. To calculate 1-hr maximum ambient air concentrations, the 1-hr maximum dispersion factors were multiplied by the maximum hourly emission rates.

3.12 Ground-Level Concentrations

Ground-level concentrations (GLCs) in the ambient air at each of the modeled Point of Maximum Impact (PMI), Maximally Exposed Individual Resident (MEIR), Maximally Exposed Individual Worker (MEIW), and maximally exposed individual sensitive receptor (MEISR) for both the long- and short-term scenarios are shown in **Table 11**.

4. RISK ASSESSMENT PROCEDURES

Modeled health risks were estimated for the Ontario Facility based on methods and tools outlined in the OEHHA Guidance. Potential Facility emissions and air dispersion results, using the HARP ADMRT tool, were input into HARP2, the OEHHA-recommended program for completing an HRA. The HARP emissions file used is provided in **Appendix B**.

4.1 Identification of Potentially Exposed Populations

The potentially exposed populations considered include current residents, off-site workers, and sensitive receptors located within the grid of receptors and described in Section 3.8. Locations of each potentially exposed population were identified based on review of the parcel data for the County of the San Bernardino.¹² The nearest residential property identified is located approximately 2,200 meters northwest of the Facility.

Since the Facility is located in the industrial/commercial zone, when evaluating the MEIR, receptors within the industrial zone were excluded.

Sensitive population locations, such as hospitals and hospices were obtained based on the review of Google Maps and California Department of Social Services Databases.¹³

Consistent with the methods specified by the OEHHA Guidance, risks were estimated at the location of the MEIR and the location of the MEIW. The MEIR and MEIW are defined as the off-site receptor locations where individuals may reside or work, respectively, with the potential highest cancer risk, acute Hazard Index (HI) or chronic non-cancer HI.

In addition, the point of PMI was identified for both cancer and non-cancer hazards.

4.1.1 Estimation of Exposure Point Concentrations

Exposure point concentrations are the concentrations of each chemical to which an individual may be exposed at a given receptor location. Chemical concentrations in air at each receptor location were estimated based on the air dispersion modeling described in Section 3. The exposure point concentrations used to estimate carcinogenic risks and chronic non-cancer HIs are the annual average concentrations of each chemical. The exposure point concentrations used to estimate acute non-cancer HIs are the one-hour maximum concentrations of each chemical. These concentrations at the 2021 operations modeled PMI, MEIR, MEIW, and the MEISR are presented in **Table 11**, respectively, as discussed in Section 3.12 above.

4.1.2 Exposure Pathways

The exposure pathways evaluated in the 2021 HRA were selected in accordance with the OEHHA Guidance and the South Coast AQMD Supplemental Guidelines. The inhalation pathway must be evaluated for all chemicals. In addition, the OEHHA Guidance also requires the evaluation of non-inhalation exposure pathways, referred to as a multi-pathway analysis, for specific chemicals.

¹² Southern California Association of Governments (SCAG 2019 Annual Land Use Dataset). Available at: <https://gisdata-scag.opendata.arcgis.com/maps/2019-annual-land-use-dataset-alu-v-2019-2-download-in-file-gdb-format-only>. Accessed: March 2023.

¹³ California Department of Social Services. Available at: <https://www.cdss.ca.gov/inforesources/community-care-licensing/facility-search-welcome>. Accessed: March 2023.

Selection of the additional pathways for a multi-pathway analysis is specific to the chemical and land use in the area surrounding the Facility and was based on the recommendations in the OEHHA Guidance. The chemicals that must be evaluated in a multi-pathway analysis are shown in Table 5.1 of the OEHHA Guidance and are programmed into HARP. As discussed in Section 2, HARP, which complements the OEHHA Guidance with respect to exposure pathway selection, was used in the Modified 2021 HRA to estimate potential cancer risks and potential non-cancer hazards. The sections below discuss the exposure pathways considered for each potentially exposed population identified in the vicinity of the Facility.

4.1.2.1 Residents

Consistent with the OEHHA Guidance for conducting a multi-pathway analysis, it was assumed that residents considered in the Modified 2021 HRA may be exposed to Sterigenics emissions via inhalation, dermal absorption, incidental ingestion of soil, ingestion of homegrown produce, and mother's milk. **Table 12** includes exposure pathways associated with the potential TACs emitted from Sterigenics Ontario. A deposition rate of 0.02 meters per second (m/s) was used, per South Coast AQMD Supplemental Guidelines.

Since the Facility is located in an urban area with no agricultural areas (e.g., cattle grazing areas or dairy farms) in the vicinity, the Modified 2021 HRA does not include an evaluation of potential exposures via ingestion of meat, dairy, or eggs. However, potential exposures to chemicals in homegrown produce were evaluated for residents in the Revised 2021 HRA because it is possible that residents in the area may have small vegetable gardens exclusively for personal use. The default home-grown produce parameters for urban settings were used in HARP, consistent with South Coast AQMD Supplemental Guidelines. Nearby drinking water reservoirs were not identified within the modeled zone of impact; therefore the drinking water pathway was not included.

4.1.2.2 Off-Site Workers

Consistent with the OEHHA Guidance, off-site workers are assumed to be potentially exposed to facility emissions via inhalation, dermal absorption, and incidental ingestion of soil. Similar to residents, a deposition rate of 0.02 meters per second (m/s) was used, per South Coast AQMD Supplemental Guidelines.

4.1.2.3 Sensitive Receptors

The sensitive populations considered in the Modified 2021 HRA include schools, hospices and medical centers as identified in **Table 10**. However, HARP does not include methods for evaluating these specific populations differently than residential populations. Thus, as a conservative screening approach, sensitive receptor locations were evaluated assuming the exposure pathways utilized for evaluating the residential population noted above.

4.1.3 Exposure Assumptions

For all pathways, default exposure assumptions built into HARP were used in the risk calculations. The exposure assumptions in HARP are consistent with OEHHA Guidance. However, the specific exposure assumptions applied to calculate risks are dependent on the exposure analysis method selected to calculate risks, as described below in Section 4.1.4.

4.1.4 HARP Exposure Analysis Methods

HARP allows a user to select from a series of exposure analysis methods. Each method in HARP utilizes exposure assumptions differently, depending on the requirements of a specific regulation (e.g., compliance with CARB's Air Toxics Hot Spots Program) or project need

(e.g., provide point estimates for risk management decisions). That is, HARP will select the dominant pathway(s) and assign exposure assumptions depending on the exposure analysis method identified by the user. For the 2021 HRA, each exposure analysis method selected was based on the type of receptor as presented in **Table 13** and is described below.

4.1.4.1 Resident

Consistent with HARP and OEHHA Guidance, potential cancer risks for residential populations were calculated based on RMP using Derived Analysis Method. This method applies conservative exposure assumptions to the two dominant exposure pathways for each chemical. The remaining pathways are evaluated using average exposure assumptions. If inhalation is one of the two dominant exposure pathways, then it is evaluated using the 80th percentile breathing rate.

As required in the OEHHA Guidance for preparing a Tier 1 risk assessment under AB2588, it was assumed that a resident may be exposed to Facility emissions for 30 years. Cancer risks estimated assuming a residential exposure duration of 30 years are used by State and local agencies for risk management and public notification purposes, even though could be conservative and not representative of actual exposure scenarios.

As discussed previously, it was assumed that individuals residing in the vicinity of the Facility may ingest produce obtained from vegetable gardens grown at their homes. Ingestion of homegrown produce is estimated by applying a default parameter of 13.7 percent of produce ingested by individuals in an urban setting that is homegrown and is comprised of four categories including exposed, leafy, protected, and root vegetables (OEHHA 2015). This is the default setting in HARP and is recommended in the South Coast AQMD Supplemental Guidelines.

The Derived (OEHHA) Analysis method was used to calculate chronic non-cancer HIs for the resident. This method utilizes high-end exposure assumptions to evaluate the two dominant pathways for each chemical. The remaining pathways are evaluated using average exposure assumptions.

4.1.4.2 Off-Site Worker

Consistent with the OEHHA Guidance, the Point Estimate Analysis method was used to calculate carcinogenic risks and chronic non-cancer HIs associated with off-site worker exposure to Facility emissions. This method utilizes the standard exposure assumptions for worker populations as defined in OEHHA Guidance.

Since potential cancer risks are driven by emission sources operating 24 hours/day and 7 days/week, adjustment factor for worker ground-level concentrations is not required, following the 2020 South Coast AQMD Supplemental Guidelines for continuous operation. This is consistent with OEHHA Guidance which recommends using the average concentration that the worker breathes over their workday, which, for continuous operation, is equivalent to the annual average air concentration calculated in AERMOD.

4.1.4.3 Sensitive Receptor

The RMP using Derived Analysis method described previously was used to calculate risks for the MEISR. Potential exposures of the MEISR were evaluated using a continuous 30-year exposure duration, consistent with the residential exposure duration. This is a very conservative approach, as the sensitive receptors include locations such as hospitals, K-12

schools, preschools, childcare facilities, and age-care facilities, where the exposure duration is not continuous and is much lower than 30 years.

4.2 Dose-Response Assessment

The dose-response assessment (also referred to as the toxicity assessment) examines the potential for a chemical to cause adverse health effects in exposed individuals (as modeled). Toxicity values that are used to estimate the likelihood of adverse effects occurring in humans are identified in this component of the risk assessment process. Toxicity factors in the latest HARP Health Database,¹⁴ integrated into the HARP program were used in the 2021 HRA. The HARP program contains the most up-to-date listing of available inhalation and oral CPFs, chronic inhalation and oral RELs, and acute RELs approved by California Environmental Protection Agency (Cal/EPA) for use in AB2588 Air Toxics Hot Spots Program risk assessments. OEHHA decided to withdraw the proposed rulemaking intended to update the CPF for EtO and plans to resume the rulemaking process at a later time. Once finalized, any future HRAs will utilize the updated value.

4.3 Risk Characterization Methodology

This section describes the methods used to estimate potential adverse effects associated with off-site exposures to chemicals emitted from the Facility. The results of the 2021 HRA are presented in Section 5. HARP was used to estimate carcinogenic risks and non-cancer HIs associated with potential exposures to potential emissions from the Facility.

4.3.1 Carcinogenic Risks

Carcinogenic risks were estimated as the incremental probability that an individual will develop cancer over a lifetime as a direct result of exposure to carcinogens potentially present in Facility emissions (USEPA 1989). The estimated risk is expressed as a unitless probability. For carcinogenic chemicals, both inhalation and non-inhalation pathways must be considered, using the CPFs in HARP. Total risk is the sum of risks attributable to each chemical considered by each pathway.

The equation used to calculate the potential excess cancer risk from inhalation for each carcinogenic chemical is:

$$\text{Risk}_{\text{inh}} = \text{DOSE}_{\text{air}} \times \text{CPF} \times \text{ASF} \times \text{ED}/\text{AT}$$

Where:

Risk_{inh}	=	Excess cancer risk from inhalation of chemical _i
Dose_{air}	=	Daily inhalation dose of chemical _i (mg/kg-day)
CPF_i	=	Inhalation CPF for chemical _i (mg/kg-day) ⁻¹
ASF	=	Age sensitivity factor for a specified age group (unitless)
ED	=	Exposure duration (in years) for a specified age group
AT	=	Averaging time for lifetime cancer risk (70 years)

¹⁴ The latest HARP Health Database is available from ARB here:
<https://ww2.arb.ca.gov/sites/default/files/classic/toxics/healthval/contable.pdf>

For residential cancer risk calculations, a factor for the fraction of time spent at home is also applied to the equation above. A similar equation, using oral dose and the oral CPF, is used to calculate risks from oral exposure. In the Modified 2021 HRA, oral cancer risks include dermal absorption, incidental ingestion of soil, ingestion of homegrown produce, and mother's milk. HARP default exposure parameters were used, as described in Section 4.1.4. Doses by pathway of exposure for each substance at the PMI, MEIR, MEIW, and MEISR calculated by HARP are in **Tables 16 – 19**.

4.3.2 Chronic Non-Cancer Hazards

When evaluating chronic non-cancer effects due to chemical exposures, a hazard quotient HQ or hazard index HI is established for each constituent. The equation used to calculate an inhalation HQ is:

$$HQ_i = \frac{C_i}{REL_i}$$

Where:

HQ _i	=	Chronic hazard quotient for chemical _i
C _i	=	Annual average air concentration of chemical _i (µg/m ³)
REL _i	=	Chronic REL for chemical _i (µg/m ³)

To evaluate the potential for adverse non-cancer health effects from simultaneous exposure to multiple chemicals, the HQs for all chemicals that affect the same target organ are summed yielding a HI. The HI is thus estimated as follows:

$$HI_{(eyes)} = \sum HQ_{substance1 (eyes)} + HQ_{substance2 (eyes)}$$

Estimation of non-inhalation chronic health effects uses a similar method, but the annual average air concentration is replaced by the dose calculated by HARP using the exposure parameters mentioned above, and the appropriate non-inhalation REL is used.

Estimation of an HI for each target organ (also referred to as a segregation of HI by target organ analysis) is recommended by OEHHA because the non-cancer effects of chemicals with different target organs are generally not additive. **Table 14** includes target organs for the TACs modeled in this analysis. For the Modified 2021 HRA, a segregation of hazard indices analysis was performed for the modeled PMI, MEIR, MEIW, and the MEISR.

4.3.3 Acute Non-Cancer Hazards

The potential for acute effects was evaluated by comparing the one-hour maximum concentrations with the acute RELs within the HARP program. Acute HQs were estimated for those chemicals for which an REL was available. The equation used to calculate acute HQs is as follows:

$$HQ_i = \frac{C_i}{REL_i}$$

Where:

HQ _i	=	Acute hazard quotient for chemical _i
C _i	=	One-hour maximum air concentration for chemical _i (µg/m ³)
REL	=	Acute non-cancer reference exposure level for chemical _i (µg/m ³)

The HQs were summed to obtain a target organ-specific HI as follows:

$$HI_{(eyes)} = \sum HQ_{\text{substance1 (eyes)}} + HQ_{\text{substance2 (eyes)}}$$

Table 14 includes target organs for the TACs modeled in this analysis. The acute HIs presented in the Modified 2021 HRA conservatively overestimate the true one hour maximum at any one time because one hour maximum air concentrations were summed regardless of time of occurrence (i.e., hour of year) which can differ by source.

5. RISK CHARACTERIZATION FOR AB2588¹⁵

Table 15 shows the results of the Modified 2021 HRA at the modeled PMI, the modeled MEIR, the modeled MEISR, and the modeled MEIW. There are no sensitive receptors with a cancer risk at or above 10 chances in-one-million.

Figures 5 through 8 show the locations of these receptors. **Figure 9** shows the location of sensitive receptors with risk greater or equal to one chance in-one-million. **Figure 10** shows the modeled 30-year lifetime cancer risk zone of impact which represent receptor locations where the multi-pathway lifetime cancer risk is greater than one chance in-one-million. It is important to note that the zone of impact (i.e., one chance in-one-million cancer risk contour) presented in **Figure 10** conservatively assumes all receptors are residential (which is not the case), along with the modeled 10, 25, and 100 chances in-one-million cancer risk contours. **Figure 11** shows the modeled 25-year lifetime cancer risk based on the worker exposure scenario. The results of the HARP risk characterization runs are provided electronically in **Appendix B**.

5.1 Carcinogens

HARP calculates cancer risk based on five-year average concentrations estimated using the annual average emission rates and dispersion factors.

5.1.1 Point of Maximum Impact (PMI)

The cancer risk at the point of maximum impact¹⁶ is 6,831.5 chances in-one-million, at a fence-line receptor (#105) on the eastern boundary of the facility. Cancer risk at the PMI is broken down by substance and pathway in **Table 20**. Over 99% of the risk is due to ethylene oxide emissions. Fugitive emissions are responsible for 99.2% of the risk, and scrubber emissions are responsible for 0.7% of the risk, due to their emissions of ethylene oxide and proximity to the receptor. The remainder of the cancer risk is due to combustion sources and ethylene oxide emissions from the oxidizers. Complete breakdowns of cancer risk by source at the PMI are provided in **Table 21**. **Figure 5** shows the location of the PMI for cancer risk.

5.1.2 Resident (MEIR)

The highest cancer risk at a residential receptor (#1468) is a cancer risk value of 2.3 chances in-one-million. The receptor is located about 4,228 meters east of Sterigenics in the City of Fontana. Cancer risk at the MEIR is broken down by substance and pathway in **Table 22**. Similar to the PMI, nearly all of the risk is due to ethylene oxide. Scrubber emissions and fugitive emissions are responsible for 1.9% and 97.6% of the risk, respectively. Complete breakdowns of cancer risk by source at the MEIR are provided in **Table 23**. **Figure 5** shows the location of the MEIR for cancer risk. A contour map showing the 30-yr residential cancer risk is included as **Figure 10**.

5.1.3 Off-Site Worker (MEIW)

The MEIW cancer risk is 568.0 chances in-one-million located at the Ontario Gateway Business Center east of Sterigenics (receptor #105). Cancer risk at the MEIW is broken down

¹⁵ When evaluating risk results, total multi-pathway potential cancer risks and maximum potential non-cancer hazard indices as reported in HARP were used. Additionally, rounding procedures specified in Section 4.2 of the South Coast AQMD Supplemental Guidelines were followed.

¹⁶ Based on 30-yr residential exposure.

by substance and pathway in **Table 24**. Ethylene oxide contributes to more than 99% of the risk. The primary sources of the worker cancer are fugitive emissions and scrubber emissions, accounting for 99.2% and 0.7% of the risk, respectively. Complete breakdowns of cancer risk by source at the MEIW are provided in **Table 25**. A contour map showing the 25-yr worker cancer risk is included as **Figure 11**.

5.1.4 Maximally Exposed Individual Sensitive Receptor (MEISR)

The highest calculated cancer risk at a sensitive receptor is 6.6 chances in-one-million, at Port View Preparatory (receptor #1250) located about 1.3 kilometers southwest of Sterigenics. Cancer risk at the maximum exposed sensitive receptor is broken down by substance and pathway in **Table 26**. Cancer risk at this receptor is primarily due to exposure to ethylene oxide, making up 99.9% of the cancer risk. Scrubber emissions and fugitive emissions are responsible for 2.2% and 97.5% of the risk, respectively. Complete breakdowns of cancer risk by source at the maximum exposed sensitive receptor are provided in **Table 27**.

Figure 5 shows the location of the maximum exposed sensitive receptor. **Table 10** provides a list of all sensitive receptors. **Figure 9** shows the locations of sensitive receptors with cancer risk greater than or equal to 1 chance in-one-million.

5.1.5 Population Exposure & Cancer Burden

Along with potential cancer risk, potential population exposure was analyzed, and potential cancer burden was calculated within the modeled zone of impact. Census block receptors were extracted from HARP within the one chance in-one-million 30-year exposure cancer risk isopleth and were modeled in AERMOD. To determine population exposure, modeling was performed at receptors located at the centroid of all census blocks whose centroid was located within the modeling domain. Both AERMOD and HARP were run in the manner as was done previously, except with the census block centroid receptors instead of fence line, grid, and sensitive receptors. 70-yr residential cancer risk was calculated at each of these receptors. For any receptor with a cancer risk greater than one per million, the population of the census block represented by that receptor was summed to determine the total exposure to various levels of cancer risk. The results of these calculations are provided in **Table 28**. Additionally, cancer burden was calculated based on the total population exposed to 70-yr cancer risk above one per million. The population of each census tract was multiplied by the 70-yr cancer risk calculated at the representative receptor. These products were summed, and the cancer burden was determined to be 0.05.

5.2 Non-Carcinogens

As described in Section 4.3.2 and 4.3.3, the non-cancer health impacts are characterized through a hazard index (HI). When more than one chemical is considered, it is assumed that the effects are additive provided the associated chemicals are expected to have an adverse impact on the same target organ system (respiratory system, liver, etc.). Thus, chemical-specific hazard indices are summed to arrive at a hazard index for each target organ. For any organ system, a total hazard index exceeding 1.0 indicates a potential health effect. Although the assumption of additivity of exposure to multiple chemicals ignores possible antagonistic or synergistic interactions, this approach has been accepted by regulatory agencies as generally conservative.

5.2.1 Chronic HI

The chronic HI calculations are based on annual average concentrations and the chronic REL.

The chronic hazard index at the PMI is 1.09, at receptor #105 located on the eastern boundary of the facility. The chronic hazard index at the PMI is broken down by substance and pathway in **Table 29**. The primary chemical contributing to the chronic hazard index is ethylene oxide (99.97%). The associated target organ is the central nervous system. Over 99% of the chronic risk is a result of emissions from fugitive emissions (99.2%) and scrubber emissions (0.7%). Complete breakdowns of chronic risk by source at the PMI are provided in **Table 30**.

The maximum chronic risk at a residential receptor is a hazard index well below 0.01, at receptor #1468 located about 4,228 meters east of Sterigenics in the City of Fontana. The chronic hazard index at the MEIR is broken down by substance and pathway in **Table 31**. The primary chemical contributing to the chronic hazard index is ethylene oxide (99.79%). The associated target organ is the central nervous system. Over 99% of the chronic risk is a result of scrubber emissions (1.9%) and fugitive emissions (97.5%). Complete breakdowns of chronic risk by source at the MEIR are provided in **Table 32**.

The maximum chronic risk at a worker receptor is a hazard index of 1.09, located on the eastern boundary of the facility (receptor #105). The chronic hazard index at the MEIW is broken down by substance and pathway in **Table 33**. The primary chemical contributing to the chronic hazard index is ethylene oxide (99.99%). The associated target organ is the central nervous system. Over 99% of the chronic risk is a result of fugitive emissions (99.2%) and scrubber emissions (0.7%). Complete breakdowns of chronic risk by source at the MEIW are provided in **Table 34**.

The maximum chronic risk at a sensitive receptor is well below 0.01 at Port View Preparatory (receptor #1250) located about 1.3 kilometers southwest of Sterigenics. The chronic hazard index at the MEISR is broken down by substance and pathway in **Table 35**. The primary chemical contributing to the chronic hazard index is ethylene oxide (99.8%). The associated target organ is the central nervous system. Over 99% of the chronic risk is a result of scrubber emissions (2.2%) and fugitive emissions (97.4%). Complete breakdowns of chronic risk by source at the MEISR are provided in **Table 36**.

Figure 6 shows the location of these receptors. A contour map showing the worker chronic risk is included as **Figure 12**.

5.2.2 8-Hour Chronic HI

The 8-hr chronic hazard index at the point of maximum impact is well below 0.01, at receptor #111 located on the southern facility boundary. The chronic hazard index at the PMI is broken down by substance and pathway in **Tables 37**. The primary chemicals contributing to the 8-hr chronic hazard index are acrolein (61.91%) and formaldehyde (34.0%). The associated target organ is the respiratory system. The sources responsible for the 8-hr chronic risk are boilers (51.4%), the two oxidizers (39.4%), and the diesel emergency generator (9.2%). Complete breakdowns of chronic risk by source at the PMI are provided in **Tables 38**.

The maximum 8-hr chronic risk at a residential receptor is a hazard index well below 0.01, at receptor #1468 located about 4,228 meters east of Sterigenics in the City of Fontana. The chronic hazard index at the MEIR is broken down by substance and pathway in **Table 39**.

The primary chemicals contributing to the 8-hr chronic hazard index are acrolein (64.9%) and formaldehyde (33.3%). The associated target organ is the respiratory system. The sources responsible for the 8-hr chronic risk are boilers (30.5%), the two oxidizers (65.7%), and the diesel emergency generator (3.8%). Complete breakdowns of chronic risk by source at the MEIR are provided in **Table 40**.

The maximum 8-hr chronic risk at a worker receptor is a hazard index well below 0.01, located at the adjacent facility south of Sterigenics (receptor #111). The 8-hr chronic hazard index at the MEIW is broken down by substance and pathway in **Table 41**. The primary chemicals contributing to the 8-hr chronic hazard index are acrolein (61.9%) and formaldehyde (34.0%). The associated target organ is the respiratory system. The sources responsible for the 8-hr chronic risk are boilers (51.4%), the two oxidizers (39.4%), and the diesel emergency generator (9.2%). Complete breakdowns of 8-hr chronic risk by source at the MEIW are provided in **Table 42**.

The maximum 8-hr chronic risk at a sensitive receptor is a hazard index well below 0.01 at Port View Preparatory (receptor #12) located about 1.3 kilometers southwest of Sterigenics. The chronic hazard index at the MEISR is broken down by substance and pathway in **Table 43**. The primary chemicals contributing to the 8-hr chronic hazard index are acrolein (63.5%) and formaldehyde (33.6%). The associated target organ is the respiratory system. The sources responsible for the 8-hr chronic risk are boilers (49.7%), the two oxidizers (44.1%), and the diesel emergency generator (6.2%). Complete breakdowns of 8-hr chronic risk by source at the MEISR are provided in **Table 44**.

Figure 7 shows the location of these receptors. The 8-hr chronic HI contours are not presented as the estimated 8-hr chronic HI at all the modeled receptors is below 0.5.

5.2.3 Acute HI

The acute hazard index at the point of maximum impact is well below 0.01, at receptor #95 located in located on the northwest corner of the facility boundary. The acute hazard index at the PMI is broken down by substance and pathway in **Table 45**. The primary chemicals contributing to the acute hazard index are acrolein (44.4%), ammonia (40.4%), and formaldehyde (14.3%). The associated target organ is the eyes. The sources responsible for the acute risk are boilers (53.0%), the two oxidizers (44.4%), and the diesel emergency generator (2.7%). Complete breakdowns of acute risk by source at the PMI are provided in **Table 46**.

The maximum acute risk at a residential receptor is a hazard index well below 0.01, at receptor #1748 located approximately 2.5 kilometers northwest of Sterigenics. The acute hazard index at the MEIR is broken down by substance and pathway in **Table 47**. The primary chemicals contributing to the acute hazard index are acrolein (44.6%), ammonia (40.9%), and formaldehyde (13.7%). The associated target organ is the eyes. The sources responsible for the acute risk are boilers (49.5%), the two oxidizers (49.0%), and the diesel emergency generator (1.5%). Complete breakdowns of acute risk by source at the MEIR are provided in **Table 48**.

The acute hazard index at the MEIW is well below 0.01, at receptor #95 located on the northwest corner of the facility. The acute hazard index at the MEIW is broken down by substance and pathway in **Table 49**. The primary chemicals contributing to the acute hazard index are acrolein (44.4%), ammonia (40.4%), and formaldehyde (14.3%). The associated target organ is the eyes. The sources responsible for the acute risk are boilers (53.0%), the

two oxidizers (44.4%), and the diesel emergency generator (2.7%). Complete breakdowns of acute risk by source at the MEIW are provided in **Table 50**.

The maximum acute risk at a sensitive receptor is a hazard index well below 0.01 at Uplift Private School (receptor #12) located about 1.2 kilometers north of Sterigenics. The acute hazard index at the MEISR is broken down by substance and pathway in **Table 51**. The primary chemicals contributing to the acute hazard index are acrolein (44.4%), ammonia (40.5%), and formaldehyde (14.3%). The associated target organ is the eyes. The sources responsible for the acute risk are boilers (60.4%), the two oxidizers (36.9%), and the diesel emergency generator (2.7%). Complete breakdowns of acute risk by source at the MEISR are provided in **Table 52**.

The MEI locations for acute HI are shown in **Figure 8**. Acute HI contours are not presented as the estimated acute HI at all the modeled receptors is below 0.5.

6. UNCERTAINTIES

In any risk evaluation, a number of assumptions must be made in order to estimate human exposure and to calculate potential risks. These assumptions may, however, introduce uncertainty in risk calculations. Regulatory guidance requires that conservative assumptions be used to provide an upper-bound estimate of the risk and to avoid underestimating the potential exposures and associated health risks, even though these assumptions may not be indicative or representative of actual conditions at and in the vicinity of the Facility. The key sources of uncertainty in the Revised 2021 HRA include:

- Estimation of emissions,
- Estimation of exposure concentrations,
- Exposure assumptions, and
- Chemical toxicity criteria.

In all of these cases, conservative, health-protective assumptions were used in the Modified 2021 HRA. By compounding conservative assumptions, the estimated excess cancer risks are upper-bound estimates and the actual incidence of cancer or non-cancer health impacts is likely to be lower (USEPA 1989). The following sections summarize the critical uncertainties associated with the emissions estimation, air dispersion modeling, and risk estimation components of the risk assessment.

6.1 Estimation of Emissions

There are some uncertainties associated with the estimation of emissions in this Modified 2021 HRA. These uncertainties would affect the subsequent estimation of exposure concentrations and risk characterization. In particular, there could be some uncertainties associated with the estimation of potential fugitive emissions from the Facility.

The EPA methodology used to prepare this HRA was formulated using industry-wide information, however minor adjustments were made for site-specific data where possible.

6.2 Estimation of Exposure Concentrations

There are a number of uncertainties associated with the estimation of exposure concentrations from air dispersion modeling of potential emissions from the Sterigenics Ontario operations, particularly when focusing on near-source receptors. This section briefly describes some of the uncertainties that may influence the exposure concentrations used in the risk characterization.

In this instance, air monitoring data is available from near-source locations at Sterigenics. The air monitoring data supports certain uncertainties associated with near-source air dispersion modeling and can qualitatively be referenced to provide a more comprehensive understanding of EtO exposures near the facility.

6.2.1 Estimates from Air Dispersion Models

As discussed in Section 3, the dispersion modeling algorithm in AERMOD was used to estimate average off-site TAC exposure concentrations at the various offsite receptor locations. The AERMOD model uses a steady-state Gaussian plume equation to calculate ambient air concentrations from emission sources. AERMOD does not predict concentrations during calm winds. AERMOD may not be appropriate for some near-field modeling in cases

where the wind field is complex due to complicated building configurations or terrain wake effects.

When air flows over buildings and similar structures, it creates a turbulent area on the downwind side of the building called a wake. A plume in the path of this airflow is drawn into the wake, temporarily trapping it in a recirculating cavity. This downwash effect leads to higher ground-level pollutant concentrations near the building than if the building was not present. The AERMOD model includes algorithms to model the effects of building downwash on emissions from nearby or adjacent point sources. As discussed in Section 2, fugitive emissions were modeled as volume sources. AERMOD currently does not account for potential downwash effects for volume sources, which is likely leading to underestimated ground level concentrations near the buildings.

The limitations of the air dispersion model provide a source of uncertainty in the estimation of exposure concentrations. According to USEPA, errors due to the limitation of the algorithms implemented in the AERMOD model in the highest estimated concentrations of +/- 10 percent to 40 percent are typical (USEPA 2005).

6.2.2 Meteorological Data Selection

Uncertainty also exists in the meteorological data used in the AERMOD air dispersion model. These uncertainties are related to the use of meteorological data that is not collected at the site. Therefore, the meteorological data used in this analysis was based on meteorological data from the Ontario International Airport. While this meteorological station is close to the Facility, the uncertainties due to the use of meteorological data not collected at the site resulted in approximate exposure concentrations.

6.3 Risk Characterization

There are a number of uncertainties associated with the risk characterization process. This section briefly describes some of the uncertainties that may influence the risk estimates produced in this analysis.

6.3.1 Exposure Assumption Uncertainties

Consistent with OEHHA Guidance, risks were estimated assuming that hypothetical residents at the receptor points spend a continuous 30 years at one location. However, the USEPA has estimated that 50% of the population lives in the same residence for only eight years, while only 10% remain in the same house for 32 years (USEPA 2011). Adults, moreover, spend only 66 to 82% of their total daily time at home (USEPA 2011), rather than the 100% assumed here. Accordingly, the actual risks to hypothetical residents at the modeled receptor locations are likely lower than those calculated in this assessment. Moreover, as discussed previously, use of residential exposure parameters represents a conservative assessment of actual risk to other types of receptors, such as sensitive receptors.

6.3.2 Dose-Response Assessment

The primary uncertainties associated with the toxicity assessment are related to derivation of toxicity values. Standard RELs and CPFs established by Cal/EPA and listed in the HARP model were used to estimate potential carcinogenic and non-cancer health effects from exposures to compounds emitted from the Facility. These values are derived by applying conservative assumptions and are intended to protect the most sensitive individuals in the potentially exposed populations.

To derive the toxicity values, Cal/EPA makes several assumptions that tend to overestimate the actual hazard or risk to human health. Because data from human studies are generally unavailable, RELs are typically derived from animal studies. Uncertainty factors and modifying factors are then applied to these data to ensure that the RELs are adequately protective of human health. For many compounds, it is anticipated that this approach overestimates the potential for non-cancer effects.

CPFs used to estimate carcinogenic risk are also typically derived based on data from animal studies. These data are based on studies in which high doses of a test chemical were administered to laboratory animals, and the reported response is extrapolated to the much lower doses typical of human exposure. Very little experimental data are available on the nature of the dose-response relationship at low doses, such as whether a threshold exists or if the dose-response curve passes through the origin. Because of this uncertainty, a conservative model is used to estimate the low-dose relationship, and uses an upper bound estimate (the 95 upper confidence limit of the slope predicted by the extrapolation model) as the CPF. With this factor, an upper-bound estimate of potential cancer risks is obtained.

OEHHA is currently evaluating changes to its inhalation unit risk for ethylene oxide, so it is possible that the OEHHA value will change. For this HRA, since the process has not yet been finalized, the HRA was prepared using OEHHA's current IUR for EtO. If OEHHA ultimately finalizes a higher cancer potency value, then the resulting estimated health risks from Sterigenics would be higher.

6.3.3 Risk Calculation

The USEPA (1989) notes that the conservative assumptions used in a risk assessment are intended to assure that the estimated risks do not underestimate the actual risks posed by a site and that the estimated risks do not necessarily represent actual risks experienced by populations at or near a site. The estimated risks in this risk assessment are based primarily on a series of conservative assumptions related to predicted environmental concentrations, exposure, and chemical toxicity. The use of conservative assumptions tends to produce upper-bound estimates of risk. Although it is difficult to quantify the uncertainties associated with all the assumptions made in this risk assessment, the use of conservative assumptions is likely to result in conservative estimates of exposure, and hence, risk.

7. CONCLUSIONS

The results of the HRA indicate that Notification Risk Level and Action Risk Level for cancer risk were exceeded based on the 2021 emissions from Sterigenics. Modified 2021 HRA results are summarized in **Table 15**. Based on these results, Sterigenics is subject to the following Rule 1402 provisions:

7.1 Public Notice

As results of this HRA, cancer risk exceeds the Notification Risk Level, Sterigenics will be required to provide public notice, in accordance with the procedures in the most current version of "SCAQMD Public Notification Procedures for Facilities Under the Air Toxics 'Hot Spots' Information and Assessment Act (AB 2588) and Rule 1402.

7.2 Risk Reduction Plan (RRP)

As results of this Modified 2021 HRA for cancer risk exceeded, Sterigenics is required to prepare a Risk Reduction Plan (RRP) because of these results and the Potentially High Risk Level Facility designation. The purpose of the RRP is to perform risk reduction measures at the Ontario facility, which will bring modeled risk below the Action Risk Level. Sterigenics has already evaluated various risk reduction measures to be implemented and included in a Risk Reduction Plan (RRP), per the Rule 1402 significant risk level requirements. An Early Risk Reduction Plan was approved by the SCAQMD on April 7, 2023. A revised Risk Reduction Plan (RRP) was submitted for SCAQMD's approval on October 6, 2023.

7.3 Current Mitigation Measures

As described in Section 6, the results of this HRA relied on various conservative assumptions which could overestimate the emissions and therefore subsequent exposure concentration and risk at the offsite receptors.

Notably, the results of this HRA **do not** represent current risk levels as Sterigenics has already implemented numerous risk reduction measures and continues to assess others. As early as June 2022, after South Coast AQMD raised concerns based on the nearby air monitoring results, Sterigenics began identifying actions they could quickly take to reduce emissions, and thus risk, through procedural changes, process changes, and physical modifications. The following risk reduction measures are the example measures that have already been implemented at the Ontario facility:

- Direct fugitive emissions to control equipment where feasible.
- Extended the amount of time sterile product is stored in heated aeration rooms to help reduce any fugitive emissions.
- Sealed off all building draft openings that were not under negative pressure as verified by conducting smoke testing or differential pressure measurements.
- Kept all access and overhead dock doors in process, storage, and shipping areas closed, except while in active use.
- Installed signage on both sides of personnel and vehicle access doors for areas with known fugitive EtO emissions.
- Inspecting all roll-up door(s) for any damage that may allow for potential fugitive EtO emissions to pass through such door twice daily or at the beginning of each shift, whichever is more frequent. Sterigenics maintains a log that documents all daily inspections.

Additionally, Sterigenics intends to implement the following measures. Detailed and additional risk reduction measures will be included in the RRP:

1. Construct and install a secondary control system which is currently being evaluated to further control scrubber EtO emissions. This control will lead to at least an additional 80% reduction in EtO emissions from the scrubber.
2. Construct and operate Permanent Total Enclosure (PTE) to capture and control fugitive emissions.

8. REFERENCES

- California Air Resources Board (CARB). 2022. Hotspots Analysis and Reporting Program (HARP). California Environmental Protection Agency. Version 1.4f. January. Available online at <https://ww2.arb.ca.gov/our-work/programs/hot-spots-analysis-reporting-program>.
- California Department of Social Services (CDSS). Community Care Licensing Facility Search. Available online at: <https://www.cdss.ca.gov/inforesources/community-care-licensing/facility-search-welcome>
- City of Los Angeles. 2022. LA County Parcels. January. Available online at: <https://geohub.lacity.org/datasets/6d85cb5f5f5641c6aa95203849ca05bb>.
- Office of Environmental Health Hazard Assessment (OEHHA). 2015. Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessments. February. Available online at <https://oehha.ca.gov/media/downloads/crn/2015guidancemanual.pdf>.
- South Coast AQMD. 2022. South Coast AQMD Modeling Guidance for AERMOD. Available online at: <http://www.aqmd.gov/home/air-quality/air-quality-data-studies/meteorological-data/modeling-guidance#Urban>. Accessed May, 2018.
- South Coast AQMD. 2020. Supplemental Guidelines for Preparing Risk Assessments for the Air Toxics "Hot Spot" Information and Assessment Act (AB2588). October. Available online at: <http://www.aqmd.gov/docs/default-source/planning/risk-assessment/ab-2588-supplemental-guidelines.pdf>
- South Coast AQMD. 2016. South Coast AQMD Rule 1402 (Control of Toxic Air Contaminants from Existing Sources). October 7. Available online at: <http://www.aqmd.gov/docs/default-source/rule-book/reg-xiv/rule-1402.pdf>.
- United States Census Bureau. 2020. Cartographic Boundary Files. Available online at: <https://www.census.gov/geographies/mapping-files/time-series/geo/cartographic-boundary.2020.html#list-tab-NP83ZD75IOWNF0AYRQ>
- United States Environmental Protection Agency (USEPA). 2013. Memorandum, Use of ASOS Meteorological Data in AERMOD Dispersion Modeling. 8 March. Available online at: <http://www.aqmd.gov/home/air-quality/meteorological-data/modeling-guidance>
- USEPA. 2005. Revision to the Guideline on Air Quality Models: Adoption of a Preferred General Purpose (Flat and Complex Terrain) Dispersion Model and Other Revisions; Final Rule. 40 CFR Part 51, Appendix W (Federal Register) 70216.
- USEPA. 2000. Meteorological Monitoring Guidance for Regulatory Modeling Applications. Office of Air Quality Planning and Standards. Research Triangle Park, North Carolina. EPA-454/R-00-005. February.
- USEPA. 1996. AP 42 Compilation of Air Pollutant Emission Factors, Volume I, Fifth Edition, Chapter 12.20 Electroplating. July. Available online at: <http://www.epa.gov/ttnchie1/ap42/ch12/final/c12s20.pdf>.

USEPA. 1989. Risk Assessment Guidance for Superfund. Volume 1: Human Health Evaluation Manual (Part A). Interim Final. Office of Emergency and Remedial Response. EPA-540/1-89/002. Washington, D.C. December. Available online at:
<http://rais.ornl.gov/documents/HHEMA.pdf>.

United States Geological Survey (USGS). National Elevation Dataset.

TABLES

Table 1
List of TAC Compounds, Associated Endpoints Evaluated, and Identification of Non-Inhalation Pathways
Sterigenics
Ontario, CA

Compound	CAS Number / Pollutant ID	Endpoints Evaluated ¹			Pathways Evaluated ¹				
		Cancer Risk	Chronic HI	Acute HI	Inhalation	Soil Ingestion	Dermal	Mother's Milk Ingestion	Homegrown produce
Acetaldehyde	75-07-0	X	X	X	X				
Acrolein	107-02-8		X	X	X				
Ammonia	7664-41-7		X	X	X				
Benzene	71-43-2	X	X	X	X				
Ethylbenzene	100-41-4	X	X		X				
Ethylene oxide	75-21-8	X	X		X				
Formaldehyde	50-00-0	X	X	X	X				
Hexane	110-54-3		X		X				
Naphthalene	91-20-3	X	X		X				
Toluene	108-88-3		X	X	X				
Total PAHs [excluding naphthalene]	1151	X			X	X	X	X	X
Xylene	1330-20-7		X	X	X				
1,3-Butadiene	106-99-0	X	X	X	X				
Cadmium	7440-43-9	X	X		X	X	X	X	
Hexavalent chromium	18540-29-9	X	X		X	X	X	X	
Arsenic	7440-38-2	X	X	X	X	X	X	X	
Lead	7439-92-1	X			X	X	X	X	X
Nickel	7440-02-0	X	X	X	X	X	X	X	
Copper	7440-50-8			X	X				
Hydrogen Chloride	7647-01-0		X	X	X				
Manganese	7439-96-5		X		X				
Mercury	7439-97-6		X	X	X	X	X	X	
Selenium	7782-49-2		X		X				
Diesel exhaust particulates	9-90-1	X	X		X				

Notes:

¹ Endpoints and exposure pathways were identified based on classifications within ARB's HARP. Available at: <https://ww2.arb.ca.gov/our-work/programs/hot-spots-analysis-reporting-program>. Accessed: March 2023.

Abbreviations:

- ARB = (California) Air Resources Board
- CAS = Chemical Abstract Service
- HARP = Hotspots Analysis and Reporting Program
- HI = Hazard Index
- OEHHA = Office of Environmental Health Hazard Assessment
- TAC = Toxic Air Contaminant

Table 2
2021 Modeled Annual Emissions by Source and Substance, in Pounds per Year and Grams per Second
Sterigenics
Ontario, CA

Source ID	Source Description	Compound		Annual Emissions	
		CAS Number / Pollutant ID	Name	lb/year	g/s
BOILER1	Boiler #1	71-43-2	Benzene	2.32E-02	3.33E-07
BOILER1		50-00-0	Formaldehyde	4.93E-02	7.09E-07
BOILER1		1151	Total PAHs [excluding naphthalene]	2.90E-04	4.17E-09
BOILER1		91-20-3	Naphthalene	8.69E-04	1.25E-08
BOILER1		75-07-0	Acetaldehyde	1.25E-02	1.79E-07
BOILER1		107-02-8	Acrolein	7.82E-03	1.13E-07
BOILER1		7664-41-7	Ammonia	9.27E+00	1.33E-04
BOILER1		100-41-4	Ethyl Benzene	2.75E-02	3.96E-07
BOILER1		110-54-3	Hexane	1.83E-02	2.63E-07
BOILER1		108-88-3	Toluene	1.06E-01	1.53E-06
BOILER1		1330-20-7	Xylene	7.88E-02	1.13E-06
BOILER2		Boiler #2	71-43-2	Benzene	2.32E-02
BOILER2	50-00-0		Formaldehyde	4.93E-02	7.09E-07
BOILER2	1151		Total PAHs [excluding naphthalene]	2.90E-04	4.17E-09
BOILER2	91-20-3		Naphthalene	8.69E-04	1.25E-08
BOILER2	75-07-0		Acetaldehyde	1.25E-02	1.79E-07
BOILER2	107-02-8		Acrolein	7.82E-03	1.13E-07
BOILER2	7664-41-7		Ammonia	9.27E+00	1.33E-04
BOILER2	100-41-4		Ethyl Benzene	2.75E-02	3.96E-07
BOILER2	110-54-3		Hexane	1.83E-02	2.63E-07
BOILER2	108-88-3		Toluene	1.06E-01	1.53E-06
BOILER2	1330-20-7		Xylene	7.88E-02	1.13E-06
BOILER5	Boiler #5		71-43-2	Benzene	2.32E-02
BOILER5		50-00-0	Formaldehyde	4.93E-02	7.09E-07
BOILER5		1151	Total PAHs [excluding naphthalene]	2.90E-04	4.17E-09
BOILER5		91-20-3	Naphthalene	8.69E-04	1.25E-08
BOILER5		75-07-0	Acetaldehyde	1.25E-02	1.79E-07
BOILER5		107-02-8	Acrolein	7.82E-03	1.13E-07
BOILER5		7664-41-7	Ammonia	9.27E+00	1.33E-04
BOILER5		100-41-4	Ethyl Benzene	2.75E-02	3.96E-07
BOILER5		110-54-3	Hexane	1.83E-02	2.63E-07
BOILER5		108-88-3	Toluene	1.06E-01	1.53E-06
BOILER5		1330-20-7	Xylene	7.88E-02	1.13E-06
BOILER6		Boiler #6	71-43-2	Benzene	2.32E-02
BOILER6	50-00-0		Formaldehyde	4.93E-02	7.09E-07
BOILER6	1151		Total PAHs [excluding naphthalene]	2.90E-04	4.17E-09
BOILER6	91-20-3		Naphthalene	8.69E-04	1.25E-08
BOILER6	75-07-0		Acetaldehyde	1.25E-02	1.79E-07
BOILER6	107-02-8		Acrolein	7.82E-03	1.13E-07
BOILER6	7664-41-7		Ammonia	9.27E+00	1.33E-04
BOILER6	100-41-4		Ethyl Benzene	2.75E-02	3.96E-07
BOILER6	110-54-3		Hexane	1.83E-02	2.63E-07
BOILER6	108-88-3		Toluene	1.06E-01	1.53E-06
BOILER6	1330-20-7		Xylene	7.88E-02	1.13E-06

Table 2
2021 Modeled Annual Emissions by Source and Substance, in Pounds per Year and Grams per Second
Sterigenics
Ontario, CA

Source ID	Source Description	Compound		Annual Emissions		
		CAS Number / Pollutant ID	Name	lb/year	g/s	
BOILER7	Boiler #7	71-43-2	Benzene	2.32E-02	3.33E-07	
BOILER7		50-00-0	Formaldehyde	4.93E-02	7.09E-07	
BOILER7		1151	Total PAHs [excluding naphthalene]	2.90E-04	4.17E-09	
BOILER7		91-20-3	Naphthalene	8.69E-04	1.25E-08	
BOILER7		75-07-0	Acetaldehyde	1.25E-02	1.79E-07	
BOILER7		107-02-8	Acrolein	7.82E-03	1.13E-07	
BOILER7		7664-41-7	Ammonia	9.27E+00	1.33E-04	
BOILER7		100-41-4	Ethyl Benzene	2.75E-02	3.96E-07	
BOILER7		110-54-3	Hexane	1.83E-02	2.63E-07	
BOILER7		108-88-3	Toluene	1.06E-01	1.53E-06	
BOILER7		1330-20-7	Xylene	7.88E-02	1.13E-06	
ABATOR		Abator, R-G47352	71-43-2	Benzene	1.72E-01	2.47E-06
ABATOR			50-00-0	Formaldehyde	3.65E-01	5.24E-06
ABATOR	1151		Total PAHs [excluding naphthalene]	2.14E-03	3.08E-08	
ABATOR	91-20-3		Naphthalene	6.43E-03	9.25E-08	
ABATOR	75-07-0		Acetaldehyde	9.22E-02	1.33E-06	
ABATOR	107-02-8		Acrolein	5.79E-02	8.33E-07	
ABATOR	7664-41-7		Ammonia	6.86E+01	9.87E-04	
ABATOR	100-41-4		Ethyl Benzene	2.04E-01	2.93E-06	
ABATOR	110-54-3		Hexane	1.35E-01	1.94E-06	
ABATOR	108-88-3		Toluene	7.85E-01	1.13E-05	
ABATOR	1330-20-7		Xylene	5.83E-01	8.39E-06	
ABATOR	75-21-8		Ethylene oxide	8.45E+00	1.22E-04	
SCRUBBER	Scrubber, F98585		75-21-8	Ethylene oxide	7.30E+01	1.05E-03
CATOX	Catalytic Oxidizer, G52334	71-43-2	Benzene	1.76E-01	2.53E-06	
CATOX		50-00-0	Formaldehyde	3.74E-01	5.39E-06	
CATOX		1151	Total PAHs [excluding naphthalene]	2.20E-03	3.17E-08	
CATOX		91-20-3	Naphthalene	6.61E-03	9.50E-08	
CATOX		75-07-0	Acetaldehyde	9.47E-02	1.36E-06	
CATOX		107-02-8	Acrolein	5.95E-02	8.55E-07	
CATOX		7664-41-7	Ammonia	7.05E+01	1.01E-03	
CATOX		100-41-4	Ethyl Benzene	2.09E-01	3.01E-06	
CATOX		110-54-3	Hexane	1.39E-01	2.00E-06	
CATOX		108-88-3	Toluene	8.06E-01	1.16E-05	
CATOX		1330-20-7	Xylene	5.99E-01	8.62E-06	
CATOX		75-21-8	Ethylene oxide	8.76E+00	1.26E-04	
FUGITIVE		Fugitive Emissions	75-21-8	Ethylene oxide	3.82E+03	5.50E-02

Table 2
2021 Modeled Annual Emissions by Source and Substance, in Pounds per Year and Grams per Second
Sterigenics
Ontario, CA

Source ID	Source Description	Compound		Annual Emissions	
		CAS Number / Pollutant ID	Name	lb/year	g/s
ICE	ICE Emergency Generator	71-43-2	Benzene	4.66E-03	6.70E-08
ICE		106-99-0	1,3-Butadiene	5.44E-03	7.82E-08
ICE		7440-43-9	Cadmium	3.75E-05	5.39E-10
ICE		50-00-0	Formaldehyde	4.32E-02	6.21E-07
ICE		18540-29-9	Hexavalent chromium	2.50E-06	3.60E-11
ICE		7440-38-2	Arsenic	4.00E-05	5.75E-10
ICE		7439-92-1	Lead	2.08E-04	2.98E-09
ICE		7440-02-0	Nickel	9.75E-05	1.40E-09
ICE		91-20-3	Naphthalene	4.93E-04	7.08E-09
ICE		1151	Total PAHs [excluding naphthalene]	9.05E-04	1.30E-08
ICE		75-07-0	Acetaldehyde	1.96E-02	2.82E-07
ICE		107-02-8	Acrolein	8.48E-04	1.22E-08
ICE		7664-41-7	Ammonia	2.00E-02	2.88E-07
ICE		7440-50-8	Copper	1.03E-04	1.47E-09
ICE		100-41-4	Ethyl Benzene	2.73E-04	3.92E-09
ICE		110-54-3	Hexane	6.73E-04	9.67E-09
ICE		7647-01-0	Hydrogen Chloride	4.66E-03	6.70E-08
ICE		7439-96-5	Manganese	7.75E-05	1.11E-09
ICE		7439-97-6	Mercury	5.00E-05	7.19E-10
ICE		7782-49-2	Selenium	5.50E-05	7.91E-10
ICE	108-88-3	Toluene	2.64E-03	3.79E-08	
ICE	1330-20-7	Xylenes	1.06E-03	1.52E-08	
ICE	9901	Diesel exhaust particulates	8.38E-01	1.20E-05	

Abbreviations:

CAS = Chemical Abstract Service

lb = pound

g/s = grams per second

PAHs = Polycyclic aromatic hydrocarbons

Table 3
2021 Modeled Annual Emissions by Substance, in Pounds per Year and Grams per Second
Sterigenics
Ontario, CA

Compound		Annual Emissions	
CAS Number / Pollutant ID	Name	lb/year	g/s
75-21-8	Ethylene Oxide	3.91E+03	5.63E-02
71-43-2	Benzene	4.68E-01	6.73E-06
106-99-0	1,3-Butadiene	5.43E-03	7.80E-08
7440-43-9	Cadmium	3.75E-05	5.39E-10
50-00-0	Formaldehyde	1.03E+00	1.48E-05
18540-29-9	Hexavalent chromium	2.50E-06	3.60E-11
7440-38-2	Arsenic	4.00E-05	5.75E-10
7439-92-1	Lead	2.08E-04	2.98E-09
7440-02-0	Nickel	9.75E-05	1.40E-09
91-20-3	Naphthalene	1.79E-02	2.57E-07
1151	Total PAHs [excluding naphthalene]	6.70E-03	9.64E-08
75-07-0	Acetaldehyde	2.69E-01	3.87E-06
107-02-8	Acrolein	1.57E-01	2.26E-06
7664-41-7	Ammonia	1.86E+02	2.67E-03
7440508	Copper	1.03E-04	1.47E-09
100-41-4	Ethyl Benzene	5.51E-01	7.93E-06
110-54-3	Hexane	3.66E-01	5.26E-06
7647-01-0	Hydrogen Chloride	4.65E-03	6.69E-08
7439-96-5	Manganese	7.75E-05	1.11E-09
7439-97-6	Mercury	5.00E-05	7.19E-10
7782-49-2	Selenium	5.50E-05	7.91E-10
108-88-3	Toluene	2.12E+00	3.06E-05
1330-20-7	Xylene	1.58E+00	2.27E-05
9901	Diesel exhaust particulates	8.38E-01	1.21E-05

Abbreviations:

CAS = Chemical Abstract Service

lb = pound

g/s = grams per second

PAHs = Polycyclic aromatic hydrocarbons

Table 4
2021 Modeled Maximum Hourly Emissions by Source and Substance, in Pounds per Hour and Grams per Second
Sterigenics
Ontario, CA

Source ID	Source Description	Compound		Hourly Emissions	
		CAS Number / Pollutant ID	Name	lb/hr	g/s
BOILER1	Boiler #1	71-43-2	Benzene	2.65E-06	3.33E-07
BOILER1		50-00-0	Formaldehyde	5.62E-06	7.09E-07
BOILER1		1151	Total PAHs [excluding naphthalene]	3.31E-08	4.17E-09
BOILER1		91-20-3	Naphthalene	9.92E-08	1.25E-08
BOILER1		75-07-0	Acetaldehyde	1.42E-06	1.79E-07
BOILER1		107-02-8	Acrolein	8.93E-07	1.13E-07
BOILER1		7664-41-7	Ammonia	1.06E-03	1.33E-04
BOILER1		100-41-4	Ethyl Benzene	3.14E-06	3.96E-07
BOILER1		110-54-3	Hexane	2.08E-06	2.63E-07
BOILER1		108-88-3	Toluene	1.21E-05	1.53E-06
BOILER1		1330-20-7	Xylene	9.00E-06	1.13E-06
BOILER2	Boiler #2	71-43-2	Benzene	2.65E-06	3.33E-07
BOILER2		50-00-0	Formaldehyde	5.62E-06	7.09E-07
BOILER2		1151	Total PAHs [excluding naphthalene]	3.31E-08	4.17E-09
BOILER2		91-20-3	Naphthalene	9.92E-08	1.25E-08
BOILER2		75-07-0	Acetaldehyde	1.42E-06	1.79E-07
BOILER2		107-02-8	Acrolein	8.93E-07	1.13E-07
BOILER2		7664-41-7	Ammonia	1.06E-03	1.33E-04
BOILER2		100-41-4	Ethyl Benzene	3.14E-06	3.96E-07
BOILER2		110-54-3	Hexane	2.08E-06	2.63E-07
BOILER2		108-88-3	Toluene	1.21E-05	1.53E-06
BOILER2		1330-20-7	Xylene	9.00E-06	1.13E-06
BOILER5	Boiler #5	71-43-2	Benzene	2.65E-06	3.33E-07
BOILER5		50-00-0	Formaldehyde	5.62E-06	7.09E-07
BOILER5		1151	Total PAHs [excluding naphthalene]	3.31E-08	4.17E-09
BOILER5		91-20-3	Naphthalene	9.92E-08	1.25E-08
BOILER5		75-07-0	Acetaldehyde	1.42E-06	1.79E-07
BOILER5		107-02-8	Acrolein	8.93E-07	1.13E-07
BOILER5		7664-41-7	Ammonia	1.06E-03	1.33E-04
BOILER5		100-41-4	Ethyl Benzene	3.14E-06	3.96E-07
BOILER5		110-54-3	Hexane	2.08E-06	2.63E-07
BOILER5		108-88-3	Toluene	1.21E-05	1.53E-06
BOILER5		1330-20-7	Xylene	9.00E-06	1.13E-06
BOILER6	Boiler #6	71-43-2	Benzene	2.65E-06	3.33E-07
BOILER6		50-00-0	Formaldehyde	5.62E-06	7.09E-07
BOILER6		1151	Total PAHs [excluding naphthalene]	3.31E-08	4.17E-09
BOILER6		91-20-3	Naphthalene	9.92E-08	1.25E-08
BOILER6		75-07-0	Acetaldehyde	1.42E-06	1.79E-07
BOILER6		107-02-8	Acrolein	8.93E-07	1.13E-07
BOILER6		7664-41-7	Ammonia	1.06E-03	1.33E-04
BOILER6		100-41-4	Ethyl Benzene	3.14E-06	3.96E-07
BOILER6		110-54-3	Hexane	2.08E-06	2.63E-07
BOILER6		108-88-3	Toluene	1.21E-05	1.53E-06
BOILER6		1330-20-7	Xylene	9.00E-06	1.13E-06

Table 4
2021 Modeled Maximum Hourly Emissions by Source and Substance, in Pounds per Hour and Grams per Second
Sterigenics
Ontario, CA

Source ID	Source Description	Compound		Hourly Emissions	
		CAS Number / Pollutant ID	Name	lb/hr	g/s
BOILER7	Boiler #7	71-43-2	Benzene	2.65E-06	3.33E-07
BOILER7		50-00-0	Formaldehyde	5.62E-06	7.09E-07
BOILER7		1151	Total PAHs [excluding naphthalene]	3.31E-08	4.17E-09
BOILER7		91-20-3	Naphthalene	9.92E-08	1.25E-08
BOILER7		75-07-0	Acetaldehyde	1.42E-06	1.79E-07
BOILER7		107-02-8	Acrolein	8.93E-07	1.13E-07
BOILER7		7664-41-7	Ammonia	1.06E-03	1.33E-04
BOILER7		100-41-4	Ethyl Benzene	3.14E-06	3.96E-07
BOILER7		110-54-3	Hexane	2.08E-06	2.63E-07
BOILER7		108-88-3	Toluene	1.21E-05	1.53E-06
BOILER7		1330-20-7	Xylene	9.00E-06	1.13E-06
ABATOR	Abator, R-G47352	71-43-2	Benzene	1.96E-05	2.47E-06
ABATOR		50-00-0	Formaldehyde	4.16E-05	5.24E-06
ABATOR		1151	Total PAHs [excluding naphthalene]	2.45E-07	3.08E-08
ABATOR		91-20-3	Naphthalene	7.34E-07	9.25E-08
ABATOR		75-07-0	Acetaldehyde	1.05E-05	1.33E-06
ABATOR		107-02-8	Acrolein	6.61E-06	8.33E-07
ABATOR		7664-41-7	Ammonia	7.83E-03	9.87E-04
ABATOR		100-41-4	Ethyl Benzene	2.33E-05	2.93E-06
ABATOR		110-54-3	Hexane	1.54E-05	1.94E-06
ABATOR		108-88-3	Toluene	8.96E-05	1.13E-05
ABATOR		1330-20-7	Xylene	6.66E-05	8.39E-06
ABATOR		75-21-8	Ethylene oxide	9.65E-04	1.22E-04
SCRUBBER		Scrubber, F98585	75-21-8	Ethylene oxide	8.34E-03
CATOX	Catalytic Oxidizer, G52334	71-43-2	Benzene	2.01E-05	2.53E-06
CATOX		50-00-0	Formaldehyde	4.27E-05	5.39E-06
CATOX		1151	Total PAHs [excluding naphthalene]	2.51E-07	3.17E-08
CATOX		91-20-3	Naphthalene	7.54E-07	9.50E-08
CATOX		75-07-0	Acetaldehyde	1.08E-05	1.36E-06
CATOX		107-02-8	Acrolein	6.79E-06	8.55E-07
CATOX		7664-41-7	Ammonia	8.05E-03	1.01E-03
CATOX		100-41-4	Ethyl Benzene	2.39E-05	3.01E-06
CATOX		110-54-3	Hexane	1.58E-05	2.00E-06
CATOX		108-88-3	Toluene	9.20E-05	1.16E-05
CATOX		1330-20-7	Xylene	6.84E-05	8.62E-06
CATOX	75-21-8	Ethylene oxide	1.00E-03	1.26E-04	
FUG	Fugitive Emissions	75-21-8	Ethylene oxide	4.37E-01	5.50E-02

Table 4
2021 Modeled Maximum Hourly Emissions by Source and Substance, in Pounds per Hour and Grams per Second
Sterigenics
Ontario, CA

Source ID	Source Description	Compound		Hourly Emissions	
		CAS Number / Pollutant ID	Name	lb/hr	g/s
ICE	ICE Emergency Generator	71-43-2	Benzene	5.32E-07	6.70E-08
ICE		106-99-0	1,3-Butadiene	6.20E-07	7.82E-08
ICE		7440-43-9	Cadmium	4.28E-09	5.39E-10
ICE		50-00-0	Formaldehyde	4.93E-06	6.21E-07
ICE		18540-29-9	Hexavalent chromium	2.85E-10	3.60E-11
ICE		7440-38-2	Arsenic	4.57E-09	5.75E-10
ICE		7439-92-1	Lead	2.37E-08	2.98E-09
ICE		7440-02-0	Nickel	1.11E-08	1.40E-09
ICE		91-20-3	Naphthalene	5.62E-08	7.08E-09
ICE		1-15-1	Total PAHs [excluding naphthalene]	1.03E-07	1.30E-08
ICE		75-07-0	Acetaldehyde	2.24E-06	2.82E-07
ICE		107-02-8	Acrolein	9.67E-08	1.22E-08
ICE		7664-41-7	Ammonia	2.28E-06	2.88E-07
ICE		7440-50-8	Copper	1.17E-08	1.47E-09
ICE		100-41-4	Ethyl Benzene	3.11E-08	3.92E-09
ICE		110-54-3	Hexane	7.68E-08	9.67E-09
ICE		7647-01-0	Hydrogen Chloride	5.32E-07	6.70E-08
ICE		7439-96-5	Manganese	8.85E-09	1.11E-09
ICE		7439-97-6	Mercury	5.71E-09	7.19E-10
ICE		7782-49-2	Selenium	6.28E-09	7.91E-10
ICE	108-88-3	Toluene	3.01E-07	3.79E-08	
ICE	1330-20-7	Xylenes	1.21E-07	1.52E-08	
ICE	9901	Diesel exhaust particulates	9.56E-05	1.20E-05	

Abbreviations:

CAS = Chemical Abstract Service

lb = pound

g/s = grams per second

PAHs = Polycyclic aromatic hydrocarbons

Table 5
Modeled Maximum Hourly Emissions by Substance, in Pounds per Hour and Grams per Second
Sterigenics
Ontario, CA

Compound		Hourly Emissions	
CAS Number / Pollutant ID	Name	lb/hr	g/s
75-21-8	Ethylene Oxide	4.47E-01	5.63E-02
71-43-2	Benzene	5.34E-05	6.73139E-06
106-99-0	1,3-Butadiene	6.19E-07	7.80295E-08
7440-43-9	Cadmium	4.28E-09	5.39374E-10
50-00-0	Formaldehyde	1.17E-04	1.48004E-05
18540-29-9	Hexavalent chromium	2.85E-10	3.59583E-11
7440-38-2	Arsenic	4.57E-09	5.75333E-10
7439-92-1	Lead	2.37E-08	2.98454E-09
7440-02-0	Nickel	1.11E-08	1.40237E-09
91-20-3	Naphthalene	2.04E-06	2.57174E-07
1151	Total PAHs [excluding naphthalene]	7.65E-07	9.6397E-08
75-07-0	Acetaldehyde	3.07E-05	3.86911E-06
107-02-8	Acrolein	1.79E-05	2.25818E-06
7664-41-7	Ammonia	2.12E-02	0.002668451
7440508	Copper	1.17E-08	1.47429E-09
100-41-4	Ethyl Benzene	6.29E-05	7.92521E-06
110-54-3	Hexane	4.18E-05	5.2643E-06
7647-01-0	Hydrogen Chloride	5.31E-07	6.68824E-08
7439-96-5	Manganese	8.85E-09	1.11471E-09
7439-97-6	Mercury	5.71E-09	7.19166E-10
7782-49-2	Selenium	6.28E-09	7.91083E-10
108-88-3	Toluene	2.42E-04	3.05502E-05
1330-20-7	Xylene	1.80E-04	2.26969E-05
9901	Diesel exhaust particulates	9.57E-05	1.20532E-05

Abbreviations:

CAS = Chemical Abstract Service
lb = pound
g/s = grams per second
PAHs = Polycyclic aromatic hydrocarbons

Table 6
Summary of Model Options and Parameters
Sterigenics
Ontario, CA

Parameter	Assumptions
Model Control Options	
Use Regulatory Default	Yes
Urban or Rural Option	Urban
Flagpole Receptor Height	0.0 meters
Source Options	
Include Building Downwash	Yes
Receptor Information	
Census Receptors	452 receptors within 1-in-a-million residential cancer risk isopleth
Fenceline Receptors	25 receptors at 20 meter spacing along property boundary line
Sensitive Receptors	18 receptors within 1-in-a-million residential cancer risk isopleth
Grid Receptors	2,874 receptors; fine grid at 50 meter spacing to 500 meter radius, medium grid at 100 meter spacing to 1,000 meter radius, coarse grid at 250 meter spacing to 5 km radius, and coarse grid at 500 meter spacing to 10 km radius
Monitoring Location Receptors	2 receptors at SCAQMD monitoring locations
Meteorology Information	
Meteorological Station ¹	Ontario Int'l Airport
Station Base Elevation	289 meters
Output	
Averaging Times	Highest 1-hour and Period (Five-Year) Average

Notes:

¹Meteorological station was selected based on proximity to the site.

References:

South Coast Air Quality Management District (SCAQMD). Processed hourly meteorological data are available for AERMOD applications. Available at: <https://www.aqmd.gov/home/air-quality/meteorological-data/data-for-aermod>

**Table 7
Point Source Modeling Parameters
Sterigenics
Ontario, CA**

AERMOD Source Group	Source¹	UTM East (m)	UTM North (m)	Base Elevation (m)	Modeled Emission Rate (g/s)	Stack Height (m)	Stack Temperature (K)	Exhaust Velocity (m/s)	Stack Diameter (m)
S0001	Ceilcote Wet Acid Scrubber	449398	3768690	290	1	14.6	304.0	1.1	0.30
S0002	Donaldson Abator	449400	3768678	290	1	13.7	355.7	18.9	0.91
S0003	Pollution Systems CatOx	449404	3768705	290	1	13.7	372.6	8.7	1.37
S0004	1.995 MMBtu/hr Boiler #1	449394	3768664	290	1	9.0	497.6	3.0	0.46
S0005	1.995 MMBtu/hr Boiler #2	449394	3768667	290	1	8.9	480.9	2.3	0.46
S0006	1.995 MMBtu/hr Boiler #5	449407	3768699	290	1	4.0	556.5	2.2	0.46
S0007	1.995 MMBtu/hr Boiler #6	449409	3768694	290	1	5.6	537.0	2.8	0.46
S0008	1.995 MMBtu/hr Boiler #7	449407	3768694	290	1	6.0	527.0	2.6	0.46
S0009	128 bhp Diesel ICE	449386	3768661	290	1	0.3	739.8	45.3	0.10

Notes

¹ Coordinates shown are in a projected coordinate system of UTM zone 11N, with a datum based on WGS 1984.

² Control equipment stack parameters based on source tests.

³ Boiler stack parameters calculated using high fire combustion source test results provided by the facility. Flow rate was calculated using fuel factors according to EPA method 19.

⁴ Emergency generator stack height and stack diameter provided by the facility. Emergency generator exhaust flow rate and exhaust temperature estimated using default parameters obtained from a San Francisco Citywide Health Risk Assessment: Technical Support Documentation. Available at: https://www.sfdph.org/dph/files/EHSdocs/AirQuality/Air_Pollutant_Exposure_Zone_Technical_Documentation_2020.pdf. Accessed: February 2023.

Abbreviations:

AERMOD = AMS/EPA Regulatory Model

g/s = grams per second

K = Kelvin

m = meter

m/s = meters per second

UTM = Universal Transverse Mercator

**Table 8
Volume Source Modeling Parameters
Sterigenics
Ontario, CA**

AERMOD Source Group	Source	UTM East¹ (m)	UTM North¹ (m)	Base Elevation (m)	Modeled Emission Rate (g/s)	Release Height² (m)	Initial Lateral Dimension (m)	Initial Vertical Dimension²³ (m)
S0010	Fugitive Emissions	449,398	3,768,690	289.96	1.00	1.5	1.90	4.98
S0011	Fugitive Emissions	449,396	3,768,709	290.03	1.00	2.7	1.24	4.98

Notes:

¹ Coordinates shown are in a projected coordinate system of UTM zone 11N, with a datum based on WGS 1984.

² The release height for fugitive emissions is modeled as half of the equipment height.

³ The initial vertical dimension represents the building height divided by 2.15, per AERMOD user's guide. The initial lateral dimension represents the length of the fugitive sources divided by 2.15, as these volume sources are adjacent to each other. per AERMOD user's guide. Available at: https://gaftp.epa.gov/Air/aqmg/SCRAM/models/preferred/aermod/aermod_userguide.pdf. Accessed: March 2023.

Abbreviations:

AERMOD = AMS/EPA Regulatory Model

South Coast AQMD = South Coast Air Quality Management District

g/s = grams per second

g/s-m² = grams per second per meter squared

m = meter

USEPA = US Environmental Protection Agency

UTM = Universal Transverse Mercator

Table 9
Building Downwash Parameters
Sterigenics
Ontario, CA

Building ID	Building	Building UTM East^{1,2} (m)	Building UTM North^{1,2} (m)	Building Height¹ (m)
STERIGENICS	687 S Wanamaker Ave, Ontario, CA 91761	449,311	3,768,733	10.70
720	720 S Rochester Ave, Ontario, CA 91761	449,450	3,768,718	6.71
FERGUSON	4652 E Brickell St, Ontario, CA 91761	449,455	3,768,867	12.19
RAYMOND	4602 E Brickell St, Ontario, CA 91761	449,279	3,768,857	9.75
STWORTH	727 S Wanamaker Ave, Ontario, CA 91761	449,277	3,768,647	9.75
700	700 S Rochester Ave, Ontario, CA 91761	449,506	3,768,705	6.71
760	760 S Rochester Ave, Ontario, CA 91761	449,423	3,768,624	6.71

Notes:

¹ Building heights were estimated using elevation data from the Google Earth Pro.

² Building locations are at the northwest corner of each building.

Abbreviations:

m = meter

UTM = Universal Transverse Mercator

Table 10
Modeled Sensitive Receptors
Sterigenics
Ontario, CA

Receptor ID	Description	Type	Address	UTM East¹ (m)	UTM North¹ (m)
SR1	Creek View Elementary School	K-12 School	3742 E Lytle Creek Loop N, Ontario, CA 91766	447,566	3,765,035
SR2	Live Oak Elementary School	K-12 School	9522 Live Oak Ave, Fontana, CA 92335	455,517	3,771,051
SR3	Beech Avenue Elementary School	K-12 School	9206 Beech Ave, Fontana, CA 92335	456,332	3,771,756
SR4	West Randall Elementary School	K-12 School	15620 Randall Ave, Fontana, CA 92335	457,061	3,771,669
SR5	Sequoia Middle School	K-12 School	9452 Hemlock Ave, Fontana, CA 92335	455,735	3,771,248
SR6	Citrus Elementary School	K-12 School	16041 Randall Ave, Fontana, CA 92335	457,867	3,771,456
SR7	Fontana High School	K-12 School	9453 Citrus Ave, Fontana, CA 92335	458,158	3,771,053
SR8	Wee Care Learning Center	Preschool	3876 Lytle Creek Loop, Ontario, CA 91761	447,742	3,764,871
SR9	Fontana Unified Early Head Start	Preschool	9680 Citrus Ave, Fontana, CA 92335	458,048	3,770,860
SR10	Hernandez Family Child Care	Daycare	9639 Larkspur Dr, Fontana, CA 92335	456,425	3,770,991
SR11	Politz Family Child Care	Daycare	11575 Countryside Dr, Fontana, CA 92337	453,316	3,767,068
SR12	Fontana Citrus Head Start	Preschool	9315 Citrus Ave, Fontana, CA 92335	458,155	3,771,453
SR13	Life Covenant Christian Academy	Private School	9315 Citrus Ave, Fontana, CA 92335	458,155	3,771,453
SR14	Poplar Elementary School	K-12 School	9937 Poplar Ave, Fontana, CA 92335	457,337	3,770,245
SR15	Henry J. Kaiser High School	K-12 School	11155 Almond Ave, Fontana, CA 92337	454,480	3,768,024
SR16	Amphy Family Day Care	Daycare	15359 Yew Ct, Fontana, CA 92335	456,632	3,770,647
SR17	Gomez Family Childcare	Daycare	9951 Catawba Ave, Fontana, CA 92335	457,738	3,770,336
SR18	Good Heart Hospice & Palliative Care	Hospice	1120, 3595-1 Inland Empire Blvd, Bldg 1, Ontario, CA 91764	447,211	3,770,147
1250	Port View Preparatory	K-12 School	1460 S Milliken Ave, Ontario, CA 91761	448,390	3,767,524
12	Uplift (Private School)	K-12 School	4684 Ontario Mills Pkwy, Ontario, CA 91764	449,338	3,769,813

Notes:

¹ Coordinates shown are in a projected coordinate system of UTM zone 11N, with a datum based on WGS 1984.

Abbreviations:

m = meter

UTM = Universal Transverse Mercator

Table 11
2021 Ground-level Concentrations (GLCs) at the PMI, MEIR, MEIW and MEISR
Sterigenics
Ontario, CA

Compound	CAS Number / Pollutant ID	Average Annual Concentration ($\mu\text{g}/\text{m}^3$) at Cancer Risk MEI				Average Annual Concentration ($\mu\text{g}/\text{m}^3$) at Chronic HI MEI				One-Hour Maximum Concentration ($\mu\text{g}/\text{m}^3$) at Acute HI PMI/MEI			
		PMI ⁵	MEISR ⁷	MEIR ¹	MEIW ²	PMI ⁵	MEISR ⁷	MEIR ¹	MEIW ²	PMI ⁶	MEISR ⁸	MEIR ⁴	MEIW ³
Benzene	71-43-2	1.08E-04	2.12E-06	1.08E-06	1.08E-04	1.08E-04	2.12E-06	1.08E-06	1.08E-04	2.62E-03	7.70E-05	3.57E-05	2.62E-03
Formaldehyde	50-00-0	2.75E-04	4.83E-06	2.40E-06	2.75E-04	2.75E-04	4.83E-06	2.40E-06	2.75E-04	6.16E-03	1.81E-04	8.06E-05	6.16E-03
Total PAHs [excluding naphthalene]	1151	2.51E-06	3.47E-08	1.60E-08	2.51E-06	2.51E-06	3.47E-08	1.60E-08	2.51E-06	4.78E-05	1.40E-06	5.65E-07	4.78E-05
Naphthalene	91-20-3	4.48E-06	8.27E-08	4.15E-08	4.48E-06	4.48E-06	8.27E-08	4.15E-08	4.48E-06	1.04E-04	3.05E-06	1.38E-06	1.04E-04
Acetaldehyde	75-07-0	8.13E-05	1.31E-06	6.31E-07	8.13E-05	8.13E-05	1.31E-06	6.31E-07	8.13E-05	1.71E-03	5.02E-05	2.16E-05	1.71E-03
Acrolein	107-02-8	3.54E-05	7.10E-07	3.63E-07	3.54E-05	3.54E-05	7.10E-07	3.63E-07	3.54E-05	8.70E-04	2.56E-05	1.19E-05	8.70E-04
Ammonia	7664-41-7	4.06E-02	8.32E-04	4.28E-04	4.06E-02	4.06E-02	8.32E-04	4.28E-04	4.06E-02	1.01E+00	2.98E-02	1.40E-02	1.01E+00
Ethylbenzene	100-41-4	1.21E-04	2.47E-06	1.27E-06	1.21E-04	1.21E-04	2.47E-06	1.27E-06	1.21E-04	3.01E-03	8.87E-05	4.16E-05	3.01E-03
Hexane	110-54-3	8.08E-05	1.64E-06	8.44E-07	8.08E-05	8.08E-05	1.64E-06	8.44E-07	8.08E-05	2.01E-03	5.91E-05	2.77E-05	2.01E-03
Toluene	108-88-3	4.68E-04	9.54E-06	4.90E-06	4.68E-04	4.68E-04	9.54E-06	4.90E-06	4.68E-04	1.16E-02	3.42E-04	1.61E-04	1.16E-02
Xylene	1330-20-7	3.46E-04	7.08E-06	3.64E-06	3.46E-04	3.46E-04	7.08E-06	3.64E-06	3.46E-04	8.63E-03	2.54E-04	1.19E-04	8.63E-03
Ethylene oxide	75-21-8	3.26E+01	3.14E-02	1.11E-02	3.26E+01	3.26E+01	3.14E-02	1.11E-02	3.26E+01	1.76E+01	2.08E+00	9.34E-01	1.76E+01
1,3-Butadiene	106-99-0	7.43E-06	5.22E-08	1.58E-08	7.43E-06	7.43E-06	5.22E-08	1.58E-08	7.43E-06	9.72E-05	2.83E-06	7.66E-07	9.72E-05
Cadmium	7440-43-9	5.13E-08	3.60E-10	1.09E-10	5.13E-08	5.13E-08	3.60E-10	1.09E-10	5.13E-08	6.71E-07	1.96E-08	5.29E-09	6.71E-07
Cr(VI)	18540-29-9	3.42E-09	2.40E-11	7.25E-12	3.42E-09	3.42E-09	2.40E-11	7.25E-12	3.42E-09	4.47E-08	1.30E-09	3.52E-10	4.47E-08
Arsenic	7440-38-2	5.47E-08	3.84E-10	1.16E-10	5.47E-08	5.47E-08	3.84E-10	1.16E-10	5.47E-08	7.16E-07	2.09E-08	5.65E-09	7.16E-07
Lead	7439-92-1	2.84E-07	1.99E-09	6.02E-10	2.84E-07	2.84E-07	1.99E-09	6.02E-10	2.84E-07	3.71E-06	1.08E-07	2.93E-08	3.71E-06
Nickel	7440-02-0	1.33E-07	9.37E-10	2.83E-10	1.33E-07	1.33E-07	9.37E-10	2.83E-10	1.33E-07	1.74E-06	5.08E-08	1.37E-08	1.74E-06
Copper	7440-50-8	1.40E-07	9.85E-10	1.40E-07	1.40E-07	1.40E-07	9.85E-10	2.97E-10	1.40E-07	1.83E-06	5.35E-08	1.45E-08	1.83E-06
HCl	7647-01-0	6.37E-06	4.48E-08	1.35E-08	6.37E-06	6.37E-06	4.48E-08	1.35E-08	6.37E-06	8.34E-05	2.43E-06	6.57E-07	8.34E-05
Manganese	7439-96-5	1.06E-07	7.45E-10	2.25E-10	1.06E-07	1.06E-07	7.45E-10	2.25E-10	1.06E-07	1.39E-06	4.05E-08	1.09E-08	1.39E-06
Mercury	7439-97-6	6.84E-08	4.80E-10	1.45E-10	6.84E-08	6.84E-08	4.80E-10	1.45E-10	6.84E-08	8.95E-07	2.61E-08	7.05E-09	8.95E-07
Selenium	7782-49-2	7.52E-08	5.28E-10	1.59E-10	7.52E-08	7.52E-08	5.28E-10	1.59E-10	7.52E-08	9.84E-07	2.87E-08	7.76E-09	9.84E-07
DieselExhPM	9901	1.15E-03	8.05E-06	2.43E-06	1.15E-03	1.15E-03	8.05E-06	2.43E-06	1.15E-03	1.50E-02	4.37E-04	1.18E-04	1.50E-02

Notes:

- ¹ Maximally Exposed Individual Resident for cancer and chronic is #1468 at UTM 11N 453,640.00 m E 3,769,024.00 m N.
- ² Maximally Exposed Individual Worker for cancer and chronic is #105 at UTM 11N 449,423.84 m E 3,768,704.09 m N.
- ³ Maximally Exposed Individual Worker for acute is #95 at UTM 11N 449,282.55 m E 3,768,755.80 m N.
- ⁴ Maximally Exposed Individual Resident for acute is #1748 at UTM 11N 448,390.00 m E 3,771,024.00 m N.
- ⁵ Point of maximum impact for cancer and chronic is #105 at UTM 11N 449,423.84 m E 3,768,704.09 m N.
- ⁶ Point of maximum impact for acute is #95 at UTM 11N 449,282.55 m E 3,768,755.80 m N.
- ⁷ Maximally Exposed Individual Sensitive Receptor for cancer and chronic is Receptor #1250 at UTM 11N 448,390 m E 3,767,524 m N.
- ⁸ Maximally Exposed Individual Sensitive Receptor for acute is Receptor #12 at UTM 11N 449,338 m E 3,769,813 m N.

Abbreviations:

μg = microgram
CAS = Chemical Abstract Service
GLC = Ground-Level Concentration
m = meter
 m^3 = cubic meter
MEI = Maximally Exposed Individual
MEIR = Maximally Exposed Individual Resident
MEIW = Maximally Exposed Individual Worker
MEISR = Maximally Exposed Individual Sensitive Receptor
PAHs = Polycyclic aromatic hydrocarbons
PMI = Point of Maximum Impact
UTM = Universal Transverse Mercator

Table 12
Multipathway Substances and Pathways
Sterigenics
Ontario, CA

Compound	CAS Number / Pollutant ID	Pathways				
		Inhalation	Soil Ingestion	Dermal	Homegrown Produce	Mother's Milk Ingestion
Acetaldehyde	75-07-0	X				
Acrolein	107-02-8	X				
Ammonia	7664-41-7	X				
Benzene	71-43-2	X				
Ethylbenzene	100-41-4	X				
Ethylene oxide	75-21-8	X				
Formaldehyde	50-00-0	X				
Hexane	110-54-3	X				
Naphthalene	91-20-3	X				
Toluene	108-88-3	X				
Total PAHs [excluding naphthalene]	1151	X	X	X	X	X
Xylene	1330-20-7	X				
1,3-Butadiene	106-99-0	X				
Cadmium	7440-43-9	X	X	X	X	
Hexavalent chromium	18540-29-9	X	X	X	X	
Arsenic	7440-38-2	X	X	X	X	
Lead	7439-92-1	X	X	X	X	X
Nickel	7440-02-0	X	X	X	X	
Copper	7440-50-8	X				
Hydrogen Chloride	7647-01-0	X				
Manganese	7439-96-5	X				
Mercury	7439-97-6	X	X	X	X	
Selenium	7782-49-2	X				
Diesel exhaust particulates	9901	X				

Abbreviations:

CAS = Chemical Abstract Services

PAHs = Polycyclic aromatic hydrocarbons

**Table 13
HARP 2 Risk Analysis Options
Sterigenics
Ontario, CA**

HARP2 Risk Analysis		Residential Cancer Risk	Population-wide Cancer Risk	Worker Cancer Risk	Residential Chronic HI	Worker Chronic HI	8-Hour Chronic HI	Acute HI
Risk Scenario	Analysis Type	Cancer Risk			Chronic HI		8-Hour Chronic HI	Acute HI
	Receptor Type	Resident	Population-wide	Worker	Resident	Worker	Worker	N/A
	Exposure Duration	30 Year	70 Year	25 year	N/A	N/A	N/A	N/A
	Intake Rate Percentile	RMP using the Derived Method	RMP using the Derived Method	OEHHA Derived Method	OEHHA Derived Method	OEHHA Derived Method	OEHHA Derived Method	N/A
Pathways to Evaluate	Tab "Pathways to Evaluate"	Inhalation, Soil ingestion, Dermal, Mother's milk, and Homegrown produce Deposition rate of 0.02 m/s		Worker Pathways Deposition rate of 0.02 m/s	Inhalation, Soil ingestion, Dermal, Mother's milk, and Homegrown produce Deposition rate of 0.02 m/s	Worker Pathways Deposition rate of 0.02 m/s	HARP Default	HARP Default
	Tab "Inh"	Apply fraction of time at residence to age bins greater than or equal to 16 years	HARP Defaults	Sources operating 24/7, no worker adjustment factor (WAF) needed	HARP Default	HARP Default	HARP Default	HARP Default
	Tab "Soil"	HARP Default	HARP Default	HARP Default	HARP Default	N/A	N/A	N/A
	Tab "Derm"	Using Warm Climate					N/A	N/A
	Tab "MMik"	HARP Default	HARP Default	N/A	HARP Default	N/A	N/A	N/A
	Tab "HG Produce"	HARP Default	HARP Default	N/A	HARP Default	N/A	N/A	N/A

References:

South Coast Air Quality Management District (SCAQMD). 2020. AB2588 and Rule 1402 Supplemental Guidelines. October. Available online at: <http://www.aqmd.gov/docs/default-source/planning/risk-assessment/ab-2588-supplemental-guidelines.pdf>

Table 14
Target Organ Systems for Non-cancer Health Effects
Sterigenics
Ontario, CA

Compound	CAS Number / Pollutant ID	Chronic Hazard Target Organs		Acute Hazard Target Organs
		Inhalation	Oral	
Acetaldehyde	75-07-0	Respiratory System	-	Eyes; Respiratory System
Acrolein	107-02-8	Respiratory System	-	Eyes; Respiratory System
Ammonia	7664-41-7	Respiratory System	-	Eyes; Respiratory System
Benzene	71-43-2	Hematologic System	-	Reproductive / Development; Immune System; Hematologic System
Ethylbenzene	100-41-4	Alimentary System; Endocrine System; Kidney; Development	-	-
Ethylene oxide	75-21-8	Nervous System	-	-
Formaldehyde	50-00-0	Respiratory System	-	Eyes
Hexane	110-54-3	Nervous System	-	-
Naphthalene	91-20-3	Respiratory System	-	-
Toluene	108-88-3	Nervous System; Development; Respiratory System	-	Nervous System; Respiratory System; Eyes; Reproductive / Developmental
Total PAHs [excluding naphthalene]	1151	-	-	-
Xylene	1330-20-7	Nervous System; Respiratory System; Eyes	-	Eyes; Respiratory System; Nervous System
1,3-Butadiene	106-99-0	Reproductive/Development	-	Reproductive/Development
Cadmium	7440-43-9	-	Kidney	-
Hexavalent chromium	18540-29-9	Respiratory System	Hematologic System	-
Arsenic	7440-38-2	Cardiovascular System; Reproductive/Development; Nervous System; Respiratory System; Skin	Reproductive/Development; Nervous System; Respiratory System; Cardiovascular System; Skin	Reproductive/Development; Cardiovascular System; Nervous System
Lead	7439-92-1	-	-	-
Nickel	7440-02-0	Hematologic System; Respiratory System	Reproductive/Development	Immune System
Copper	7440-50-8	-	-	Respiratory System
Hydrogen Chloride	7647-01-0	Respiratory System	-	Eyes; Respiratory System
Manganese	7439-96-5	Nervous System	-	-
Mercury	7439-97-6	Kidney; Nervous System; Reproductive/Development	Kidney; Nervous System; Reproductive/Development	Nervous System; Development
Selenium	7782-49-2	Alimentary System; Cardiovascular System; Nervous System	Alimentary System; Cardiovascular System; Nervous System	-
Diesel exhaust particulates	9901	-	-	-

Abbreviations:

- CAS = Chemical Abstract Service
- HARP = Hotspots Analysis Reporting Program
- OEHHA = Office of Environmental Health Hazard Assessment
- PAHs = Polycyclic aromatic hydrocarbons

References:

California Air Resource Board (CARB). 2022. OEHHA/ARB Approved Reference Exposure Levels and Target Organs. September. Available at: <https://ww2.arb.ca.gov/sites/default/files/classic/toxics/healthval/totables.pdf>

Table 15
2021 Health Effects Results for PMI, MEIR, MEISR, and MEIW
Sterigenics
Ontario, CA

Health Effect	Receptor Type	Receptor ID	UTM East (m)	UTM North (m)	Cancer Risk (in a million) or HI	SCAQMD Thresholds ⁴	
						Public Notice	Action Level
Cancer ¹	PMI-R ³	105	449,423.84	3,768,704.09	6831.5	10	25
	MEIR	1468	453,640.00	3,769,024.00	2.3		
	PMI-W ³	105	449,423.84	3,768,704.09	568.0		
	MEIW	105	449,423.84	3,768,704.09	568.0		
	MEISR	1250	448,390.00	3,767,524.00	6.6		
Chronic HI ²	PMI ³	105	449,423.84	3,768,704.09	1.09	1	3
	MEIR	1468	453,640.00	3,769,024.00	0.0004		
	MEIW	105	449,423.84	3,768,704.09	1.09		
	MEISR	1250	448,390.00	3,767,524.00	0.00105		
8-Hr Chronic HI ²	PMI ³	111	449,344.72	3,768,650.38	0.0001	1	3
	MEIR	1468	453,640.00	3,769,024.00	0.000001		
	MEIW	111	449,344.72	3,768,650.38	0.0001		
	MEISR	1250	448,390.00	3,767,524.00	0.000001		
Acute HI ²	PMI ³	95	449,282.55	3,768,755.80	0.0008	1	3
	MEIR	1748	448,390.00	3,771,024.00	0.00001		
	MEIW	95	449,282.55	3,768,755.80	0.0008		
	MEISR	12	449,338.00	3,769,813.00	0.00002		

Notes:

¹ Excess cancer risks for MEIR assume a 30-year exposure period; excess cancer risk for MEIW assumes a 25-year exposure period.

² The chronic HI and acute HI reflect the maximum risk to a given target organ.

³ The location of the PMI includes the facility boundary.

⁴ South Coast AQMD thresholds are defined per Rule 1402.

Abbreviations:

ARB = (California) Air Resources Board

South Coast AQMD = South Coast Air Quality Management District

HARP = Hotspots Analysis Reporting Program

HI = Hazard Index

m = meters

MEIR = Maximally Exposed Individual Resident

MEIW = Maximally Exposed Individual Worker

MEISR = Maximally Exposure Individual Sensitive Receptor

OEHHA = Office of Environmental Health Hazard Assessment

PMI = Point of Maximum Impact

UTM = Universal Transverse Mercator

Table 16
Inhalation Concentration and Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk PMI
Sterigenics
Ontario, CA

Cancer Risk PMI: Receptor #105						
UTM East (m): 449423.84, UTM North (m): 3768704.09						
Chemical Name	CAS Number / Pollutant ID	Inhalation Concentration ($\mu\text{g}/\text{m}^3$)	Estimated Dose by Pathway (mg/kg/d)			
			Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce
Benzene	71-43-2	1.08E-04	-	-	-	-
Formaldehyde	50-00-0	2.75E-04	-	-	-	-
Total PAHs [excluding naphthalene]	1151	2.51E-06	3.2E-10	1.7E-10	3.0E-08	4.9E-09
Naphthalene	91-20-3	4.48E-06	-	-	-	-
Acetaldehyde	75-07-0	8.13E-05	-	-	-	-
Acrolein	107-02-8	3.54E-05	-	-	-	-
Ammonia	7664-41-7	4.06E-02	-	-	-	-
Ethylbenzene	100-41-4	1.21E-04	-	-	-	-
Hexane	110-54-3	8.08E-05	-	-	-	-
Toluene	108-88-3	4.68E-04	-	-	-	-
Xylene	1330-20-7	3.46E-04	-	-	-	-
Ethylene oxide	75-21-8	3.26E+01	-	-	-	-
1,3-Butadiene	106-99-0	7.43E-06	-	-	-	-
Cadmium	7440-43-9	5.13E-08	4.6E-10	1.1E-12	-	9.4E-10
Cr(VI)	18540-29-9	3.42E-09	3.1E-11	7.5E-13	-	9.4E-10
Arsenic	7440-38-2	5.47E-08	4.9E-10	3.6E-11	-	7.0E-10
Lead	7439-92-1	2.84E-07	2.6E-09	9.3E-11	1.5E-09	3.7E-10
Nickel	7440-02-0	1.33E-07	1.2E-09	2.9E-11	-	8.6E-10
Copper	7440-50-8	1.40E-07	-	-	-	-
HCl	7647-01-0	6.37E-06	-	-	-	-
Manganese	7439-96-5	1.06E-07	-	-	-	-
Mercury	7439-97-6	6.84E-08	6.2E-10	3.0E-11	-	4.8E-10
Selenium	7782-49-2	7.52E-08	6.8E-10	2.5E-11	-	3.5E-09
DieselExhPM	9901	1.15E-03	-	-	-	-

Abbreviations:

μg = microgram
CAS = Chemical Abstract Service
d = day
kg = kilogram
m = meter
 m^3 = cubic meter
mg = milligram

PAHs = Polycyclic aromatic hydrocarbons
PMI = Point of Maximum Impact
UTM = Universal Transverse Mercator

Table 17
Inhalation Concentration and Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk MEIR
Sterigenics
Ontario, CA

Cancer Risk MEIR: Receptor #1468						
UTM East (m): 453640, UTM North (m): 3769024						
Chemical Name	CAS Number / Pollutant ID	Inhalation Concentration ($\mu\text{g}/\text{m}^3$)	Estimated Dose by Pathway (mg/kg/d)			
			Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce
Benzene	71-43-2	1.08E-06	-	-	-	-
Formaldehyde	50-00-0	2.40E-06	-	-	-	-
Total PAHs [excluding naphthalene]	1151	1.60E-08	2.1E-12	1.1E-12	1.9E-10	3.1E-11
Naphthalene	91-20-3	4.15E-08	-	-	-	-
Acetaldehyde	75-07-0	6.31E-07	-	-	-	-
Acrolein	107-02-8	3.63E-07	-	-	-	-
Ammonia	7664-41-7	4.28E-04	-	-	-	-
Ethylbenzene	100-41-4	1.27E-06	-	-	-	-
Hexane	110-54-3	8.44E-07	-	-	-	-
Toluene	108-88-3	4.90E-06	-	-	-	-
Xylene	1330-20-7	3.64E-06	-	-	-	-
Ethylene oxide	75-21-8	1.11E-02	-	-	-	-
1,3-Butadiene	106-99-0	1.58E-08	-	-	-	-
Cadmium	7440-43-9	1.09E-10	9.8E-13	2.4E-15	-	2.0E-12
Cr(VI)	18540-29-9	7.25E-12	6.5E-14	1.6E-15	-	2.0E-12
Arsenic	7440-38-2	1.16E-10	1.0E-12	7.6E-14	-	1.5E-12
Lead	7439-92-1	6.02E-10	5.4E-12	2.0E-13	3.2E-12	7.9E-13
Nickel	7440-02-0	2.83E-10	2.6E-12	6.2E-14	-	1.8E-12
Copper	7440-50-8	2.97E-10	-	-	-	-
HCl	7647-01-0	1.35E-08	-	-	-	-
Manganese	7439-96-5	2.25E-10	-	-	-	-
Mercury	7439-97-6	1.45E-10	1.3E-12	6.3E-14	-	1.0E-12
Selenium	7782-49-2	1.59E-10	1.4E-12	5.2E-14	-	7.4E-12
DieselExhPM	9901	2.43E-06	-	-	-	-

Abbreviations:

μg = microgram
CAS = Chemical Abstract Service
d = day
kg = kilogram
m = meter
 m^3 = cubic meter

MEIR = Maximally Exposed Individual Resident
mg = milligram
PAHs = Polycyclic aromatic hydrocarbons
PMI = Point of Maximum Impact
UTM = Universal Transverse Mercator

Table 18
Inhalation Concentration and Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk MEIW
Sterigenics
Ontario, CA

Cancer Risk MEIW: Receptor #105				
UTM East (m): 449423.84, UTM North (m): 3768704.09				
Chemical Name	CAS Number / Pollutant ID	Inhalation Concentration ($\mu\text{g}/\text{m}^3$)	Estimated Dose by Pathway (mg/kg/d)	
			Soil Ingestion	Dermal
Benzene	71-43-2	1.08E-04	-	-
Formaldehyde	50-00-0	2.75E-04	-	-
Total PAHs [excluding naphthalene]	1151	2.51E-06	3.2E-10	1.7E-10
Naphthalene	91-20-3	4.48E-06	-	-
Acetaldehyde	75-07-0	8.13E-05	-	-
Acrolein	107-02-8	3.54E-05	-	-
Ammonia	7664-41-7	4.06E-02	-	-
Ethylbenzene	100-41-4	1.21E-04	-	-
Hexane	110-54-3	8.08E-05	-	-
Toluene	108-88-3	4.68E-04	-	-
Xylene	1330-20-7	3.46E-04	-	-
Ethylene oxide	75-21-8	3.26E+01	-	-
1,3-Butadiene	106-99-0	7.43E-06	-	-
Cadmium	7440-43-9	5.13E-08	4.6E-10	1.1E-12
Cr(VI)	18540-29-9	3.42E-09	3.1E-11	7.5E-13
Arsenic	7440-38-2	5.47E-08	4.9E-10	3.6E-11
Lead	7439-92-1	2.84E-07	2.6E-09	9.3E-11
Nickel	7440-02-0	1.33E-07	1.2E-09	2.9E-11
Copper	7440-50-8	1.40E-07	-	-
HCl	7647-01-0	6.37E-06	-	-
Manganese	7439-96-5	1.06E-07	-	-
Mercury	7439-97-6	6.84E-08	6.2E-10	3.0E-11
Selenium	7782-49-2	7.52E-08	6.8E-10	2.5E-11
DieselExhPM	9901	1.15E-03	-	-

Abbreviations:

μg = microgram

CAS = Chemical Abstract Service

d = day

kg = kilogram

m = meter

m^3 = cubic meter

MEIW = Maximally Exposed Individual Worker

mg = milligram

PAHs = Polycyclic aromatic hydrocarbons

UTM = Universal Transverse Mercator

Table 19
Inhalation Concentration and Dose by Substance and Exposure Pathway at the 2021 Modeled Cancer Risk MEISR
Sterigenics
Ontario, CA

Cancer Risk MEISR: Sensitive Receptor #1250						
UTM East (m): 448390, UTM North (m): 3767524						
Chemical Name	CAS Number / Pollutant ID	Inhalation Concentration ($\mu\text{g}/\text{m}^3$)	Estimated Dose by Pathway (mg/kg/d)			
			Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce
Benzene	71-43-2	2.12E-06	-	-	-	-
Formaldehyde	50-00-0	4.83E-06	-	-	-	-
Total PAHs [excluding naphthalene]	1151	3.47E-08	4.4E-12	2.3E-12	4.1E-10	6.8E-11
Naphthalene	91-20-3	8.27E-08	-	-	-	-
Acetaldehyde	75-07-0	1.31E-06	-	-	-	-
Acrolein	107-02-8	7.10E-07	-	-	-	-
Ammonia	7664-41-7	8.32E-04	-	-	-	-
Ethylbenzene	100-41-4	2.47E-06	-	-	-	-
Hexane	110-54-3	1.64E-06	-	-	-	-
Toluene	108-88-3	9.54E-06	-	-	-	-
Xylene	1330-20-7	7.08E-06	-	-	-	-
Ethylene oxide	75-21-8	3.14E-02	-	-	-	-
1,3-Butadiene	106-99-0	5.22E-08	-	-	-	-
Cadmium	7440-43-9	3.60E-10	3.3E-12	7.9E-15	-	6.6E-12
Cr(VI)	18540-29-9	2.40E-11	2.2E-13	5.2E-15	-	6.6E-12
Arsenic	7440-38-2	3.84E-10	3.5E-12	2.5E-13	-	4.9E-12
Lead	7439-92-1	1.99E-09	1.8E-11	6.5E-13	1.1E-11	2.6E-12
Nickel	7440-02-0	9.37E-10	8.5E-12	2.0E-13	-	6.1E-12
Copper	7440-50-8	9.85E-10	-	-	-	-
HCl	7647-01-0	4.48E-08	-	-	-	-
Manganese	7439-96-5	7.45E-10	-	-	-	-
Mercury	7439-97-6	4.80E-10	4.3E-12	2.1E-13	-	3.4E-12
Selenium	7782-49-2	5.28E-10	4.8E-12	1.7E-13	-	2.5E-11
DieselExhPM	9901	8.0E-06	-	-	-	-

Abbreviations:

μg = microgram
CAS = Chemical Abstract Service
d = day
kg = kilogram
m = meter
 m^3 = cubic meter

MEISR = Maximally Exposed Individual Sensitive Receptor
mg = milligram
PAHs = Polycyclic aromatic hydrocarbons
PMI = Point of Maximum Impact
UTM = Universal Transverse Mercator

Table 20
Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk PMI
Sterigenics
Ontario, CA

Residential Cancer Risk PMI: Receptor #105									
UTM East (m): 449423.84, UTM North (m): 3768704.09									
Chemical Name	CAS Number / Pollutant ID	Excess Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Excess Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce			
Benzene	71-43-2	7.3E-09	-	-	-	-	7.3E-09	7.3E-03	0.000%
Formaldehyde	50-00-0	3.9E-09	-	-	-	-	3.9E-09	3.9E-03	0.000%
Total PAHs [excluding naphthalene]	1151	4.7E-09	1.7E-08	4.3E-09	4.1E-08	1.2E-07	1.9E-07	1.9E-01	0.003%
Naphthalene	91-20-3	3.6E-10	-	-	-	-	3.6E-10	3.6E-04	0.0000%
Acetaldehyde	75-07-0	5.5E-10	-	-	-	-	5.5E-10	5.5E-04	0.0000%
Acrolein	107-02-8	-	-	-	-	-	-	-	-
Ammonia	7664-41-7	-	-	-	-	-	-	-	-
Ethylbenzene	100-41-4	7.1E-10	-	-	-	-	7.1E-10	7.1E-04	0.0000%
Hexane	110-54-3	-	-	-	-	-	-	-	-
Toluene	108-88-3	-	-	-	-	-	-	-	-
Xylene	1330-20-7	-	-	-	-	-	-	-	-
Ethylene oxide	75-21-8	6.8E-03	-	-	-	-	6.8E-03	6.8E+03	99.984%
1,3-Butadiene	106-99-0	3.0E-09	-	-	-	-	3.0E-09	3.0E-03	0.000%
Cadmium	7440-43-9	5.2E-10	-	-	-	-	5.2E-10	5.2E-04	0.000%
Cr(VI)	18540-29-9	1.2E-09	2.1E-11	8.0E-13	-	8.9E-10	2.1E-09	2.1E-03	0.000%
Arsenic	7440-38-2	3.1E-10	2.4E-09	1.2E-10	-	2.0E-09	4.8E-09	4.8E-03	0.000%
Lead	7439-92-1	5.7E-12	6.9E-11	1.7E-12	1.3E-12	1.9E-11	9.7E-11	9.7E-05	0.0000%
Nickel	7440-02-0	8.2E-11	-	-	-	-	8.2E-11	8.2E-05	0.0000%
Copper	7440-50-8	-	-	-	-	-	-	-	-
HCl	7647-01-0	-	-	-	-	-	-	-	-
Manganese	7439-96-5	-	-	-	-	-	-	-	-
Mercury	7439-97-6	-	-	-	-	-	-	-	-
Selenium	7782-49-2	-	-	-	-	-	-	-	-
DieselExhPM	9901	8.5E-07	-	-	-	-	8.5E-07	8.5E-01	0.012%
Total		6.8E-03	2.0E-08	4.4E-09	4.1E-08	1.2E-07	6.8E-03	6831.5	100%

Worker Cancer Risk PMI: Receptor #105									
UTM East (m): 449423.84, UTM North (m): 3768704.09									
Chemical Name	CAS Number / Pollutant ID	Excess Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Excess Cancer Risk (number in)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce			
Benzene	71-43-2	6.1E-10	-	-	-	-	6.1E-10	6.1E-04	0.000%
Formaldehyde	50-00-0	3.2E-10	-	-	-	-	3.2E-10	3.2E-04	0.000%
Total PAHs [excluding naphthalene]	1151	4.1E-10	1.7E-09	1.5E-09	-	-	3.6E-09	3.6E-03	0.000%
Naphthalene	91-20-3	3.0E-11	-	-	-	-	3.0E-11	3.0E-05	0.0000%
Acetaldehyde	75-07-0	4.6E-11	-	-	-	-	4.6E-11	4.6E-05	0.000%
Acrolein	107-02-8	-	-	-	-	-	-	-	-
Ammonia	7664-41-7	-	-	-	-	-	-	-	-
Ethylbenzene	100-41-4	5.9E-11	-	-	-	-	5.9E-11	5.9E-05	0.0000%
Hexane	110-54-3	-	-	-	-	-	-	-	-
Toluene	108-88-3	-	-	-	-	-	-	-	-
Xylene	1330-20-7	-	-	-	-	-	-	-	-
Ethylene oxide	75-21-8	5.7E-04	-	-	-	-	5.7E-04	5.7E+02	99.9866%
1,3-Butadiene	106-99-0	2.5E-10	-	-	-	-	2.5E-10	2.5E-04	0.000%
Cadmium	7440-43-9	4.3E-11	-	-	-	-	4.3E-11	4.3E-05	0.0000%
Cr(VI)	18540-29-9	9.8E-11	2.1E-12	1.4E-13	-	-	1.0E-10	1.0E-04	0.000%
Arsenic	7440-38-2	2.7E-11	1.0E-10	4.0E-11	-	-	1.7E-10	1.7E-04	0.0000%
Lead	7439-92-1	6.7E-13	2.9E-12	3.0E-13	-	-	3.9E-12	3.9E-06	0.000%
Nickel	7440-02-0	6.8E-12	-	-	-	-	6.8E-12	6.8E-06	0.0000%
Copper	7440-50-8	-	-	-	-	-	-	-	-
HCl	7647-01-0	-	-	-	-	-	-	-	-
Manganese	7439-96-5	-	-	-	-	-	-	-	-
Mercury	7439-97-6	-	-	-	-	-	-	-	-
Selenium	7782-49-2	-	-	-	-	-	-	-	-
DieselExhPM	9901	7.1E-08	-	-	-	-	7.1E-08	7.1E-02	0.0125%
Total		5.7E-04	1.8E-09	1.5E-09	-	-	5.7E-04	568.0	100%

Abbreviations:

- CAS = Chemical Abstract Service
- m = meter
- MEIR = Maximally Exposed Individual Resident
- PAHs = Polycyclic aromatic hydrocarbons
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 21
Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk PMI
Sterigenics
Ontario, CA

Residential Cancer Risk PMI: Receptor #105									
UTM East (m): 449423.84, UTM North (m): 3768704.09									
DEV_ID	Source	Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce			
ABATOR	Abator, R-G47352	1.7E-07	1.4E-09	3.6E-10	3.4E-09	9.8E-09	1.9E-07	1.9E-01	0.00%
CATOX	Catalytic Oxidizer, G52334	2.9E-08	2.4E-10	5.9E-11	5.7E-10	1.6E-09	3.2E-08	3.2E-02	0.00%
SCRUBBER	Scrubber, F98585	5.1E-05	-	-	-	-	5.1E-05	5.1E+01	0.7%
FUGITIVE	Fugitive Emissions	6.8E-03	-	-	-	-	6.8E-03	6.8E+03	99.2%
BOILER1	Boiler #1	2.1E-09	1.3E-09	3.3E-10	3.1E-09	8.9E-09	1.6E-08	1.6E-02	0.00%
BOILER2	Boiler #2	2.7E-09	1.7E-09	4.3E-10	4.1E-09	1.2E-08	2.0E-08	2.0E-02	0.00%
BOILERS5	Boiler #5	2.8E-09	1.8E-09	4.5E-10	4.3E-09	1.2E-08	2.2E-08	2.2E-02	0.00%
BOILER6	Boiler #6	1.7E-09	1.1E-09	2.8E-10	2.7E-09	7.6E-09	1.3E-08	1.3E-02	0.00%
BOILER7	Boiler #7	1.8E-09	1.1E-09	2.9E-10	2.7E-09	7.8E-09	1.4E-08	1.4E-02	0.00%
ICE	ICE Emergency Generator	8.6E-07	1.1E-08	2.3E-09	2.0E-08	6.1E-08	9.6E-07	9.6E-01	0.0%
Total		6.8E-03	2.0E-08	4.4E-09	4.1E-08	1.2E-07	6.8E-03	6831.54	100%

Worker Cancer Risk PMI: Receptor #105									
UTM East (m): 449423.84, UTM North (m): 3768704.09									
DEV_ID	Source	Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce			
ABATOR	Abator, R-G47352	1.4E-08	1.4E-10	1.2E-10	-	-	1.5E-08	1.5E-02	0.0%
CATOX	Catalytic Oxidizer, G52334	2.4E-09	2.4E-11	2.1E-11	-	-	2.5E-09	2.5E-03	0.0%
SCRUBBER	Scrubber, F98585	4.2E-06	-	-	-	-	4.2E-06	4.2E+00	0.7%
FUGITIVE	Fugitive Emissions	5.6E-04	-	-	-	-	5.6E-04	5.6E+02	99.2%
BOILER1	Boiler #1	1.7E-10	1.3E-10	1.1E-10	-	-	4.2E-10	4.2E-04	0.0%
BOILER2	Boiler #2	2.2E-10	1.7E-10	1.5E-10	-	-	5.4E-10	5.4E-04	0.0%
BOILERS5	Boiler #5	2.4E-10	1.8E-10	1.6E-10	-	-	5.7E-10	5.7E-04	0.0%
BOILER6	Boiler #6	1.5E-10	1.1E-10	9.7E-11	-	-	3.6E-10	3.6E-04	0.0%
BOILER7	Boiler #7	1.5E-10	1.1E-10	9.9E-11	-	-	3.6E-10	3.6E-04	0.0%
ICE	ICE Emergency Generator	7.2E-08	9.6E-10	7.8E-10	-	-	7.3E-08	7.3E-02	0.0%
Total		5.7E-04	1.8E-09	1.5E-09	0.0E+00	0.0E+00	5.7E-04	568.03	100%

Abbreviations:

- m = meter
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 22
Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk MEIR
Sterigenics
Ontario, CA

Cancer Risk MEIR: Receptor #1468									
UTM East (m): 453640, UTM North (m): 3769024									
Chemical Name	CAS Number / Pollutant ID	Excess Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Excess Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce			
Benzene	71-43-2	7.3E-11	-	-	-	-	7.3E-11	7.3E-05	0.003%
Formaldehyde	50-00-0	3.4E-11	-	-	-	-	3.4E-11	3.4E-05	0.001%
Total PAHs [excluding naphthalene]	1151	3.0E-11	1.1E-10	2.8E-11	2.6E-10	7.5E-10	1.2E-09	1.2E-03	0.051%
Naphthalene	91-20-3	3.4E-12	-	-	-	-	3.4E-12	3.4E-06	0.000%
Acetaldehyde	75-07-0	4.3E-12	-	-	-	-	4.3E-12	4.3E-06	0.000%
Acrolein	107-02-8	-	-	-	-	-	-	-	-
Ammonia	7664-41-7	-	-	-	-	-	-	-	-
Ethylbenzene	100-41-4	7.5E-12	-	-	-	-	7.5E-12	7.5E-06	0.000%
Hexane	110-54-3	-	-	-	-	-	-	-	-
Toluene	108-88-3	-	-	-	-	-	-	-	-
Xylene	1330-20-7	-	-	-	-	-	-	-	-
Ethylene oxide	75-21-8	2.3E-06	-	-	-	-	2.3E-06	2.3E+00	99.866%
1,3-Butadiene	106-99-0	6.4E-12	-	-	-	-	6.4E-12	6.4E-06	0.000%
Cadmium	7440-43-9	1.1E-12	-	-	-	-	1.1E-12	1.1E-06	0.000%
Cr(VI)	18540-29-9	2.5E-12	4.4E-14	1.7E-15	-	1.9E-12	4.4E-12	4.4E-06	0.000%
Arsenic	7440-38-2	6.6E-13	5.0E-12	2.4E-13	-	4.3E-12	1.0E-11	1.0E-05	0.000%
Lead	7439-92-1	1.2E-14	1.5E-13	3.6E-15	2.7E-15	4.1E-14	2.1E-13	2.1E-07	0.0000%
Nickel	7440-02-0	1.7E-13	-	-	-	-	1.7E-13	1.7E-07	0.0000%
Copper	7440-50-8	-	-	-	-	-	-	-	-
HCl	7647-01-0	-	-	-	-	-	-	-	-
Manganese	7439-96-5	-	-	-	-	-	-	-	-
Mercury	7439-97-6	-	-	-	-	-	-	-	-
Selenium	7782-49-2	-	-	-	-	-	-	-	-
DieselExhPM	9901	1.8E-09	-	-	-	-	1.8E-09	1.8E-03	0.077%
Total		2.3E-06	1.2E-10	2.8E-11	2.6E-10	7.6E-10	2.3E-06	2.3	100%

Abbreviations:

CAS = Chemical Abstract Service
m = meter
MEIR = Maximally Exposed Individual Resident
PAHs = Polycyclic aromatic hydrocarbons
UTM = Universal Transverse Mercator

Table 23
Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk MEIR
Sterigenics
Ontario, CA

Cancer Risk MEIR: Receptor #1468									
UTM East (m): 453640, UTM North (m): 3769024									
DEV_ID	Source	Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegro wn Produce			
ABATOR	Abator, R-G47352	3.9E-09	3.2E-11	8.0E-12	7.6E-11	2.2E-10	4.2E-09	4.2E-03	0.2%
CATOX	Catalytic Oxidizer, G52334	3.8E-09	3.1E-11	7.8E-12	7.4E-11	2.1E-10	4.1E-09	4.1E-03	0.176%
SCRUBBER	Scrubber, F98585	4.5E-08	-	-	-	-	4.5E-08	4.5E-02	1.9%
FUGITIVE	Fugitive Emissions	2.3E-06	-	-	-	-	2.3E-06	2.3E+00	97.6%
BOILER1	Boiler #1	9.2E-12	5.9E-12	1.5E-12	1.4E-11	4.0E-11	7.1E-11	7.1E-05	0.00%
BOILER2	Boiler #2	9.2E-12	5.9E-12	1.5E-12	1.4E-11	4.0E-11	7.1E-11	7.1E-05	0.00%
BOILER5	Boiler #5	9.1E-12	5.8E-12	1.5E-12	1.4E-11	3.9E-11	7.0E-11	7.0E-05	0.00%
BOILER6	Boiler #6	9.1E-12	5.8E-12	1.5E-12	1.4E-11	4.0E-11	7.0E-11	7.0E-05	0.00%
BOILER7	Boiler #7	9.1E-12	5.9E-12	1.5E-12	1.4E-11	4.0E-11	7.0E-11	7.0E-05	0.00%
ICE	ICE Emergency Generator	1.8E-09	2.3E-11	4.8E-12	4.3E-11	1.3E-10	2.0E-09	2.0E-03	0.1%
Total		2.3E-06	1.2E-10	2.8E-11	2.6E-10	7.6E-10	2.3E-06	2.3	100%

Abbreviations:

m = meter

MEIR = Maximally Exposed Individual Resident

UTM = Universal Transverse Mercator

Table 24
Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk MEIW
Sterigenics
Ontario, CA

Cancer Risk MEIW: Receptor #105							
UTM East (m): 449423.84, UTM North (m): 3768704.09							
Chemical Name	CAS Number / Pollutant ID	Excess Cancer Risk by Exposure Pathway			Total Cancer Risk	Total Excess Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal			
Benzene	71-43-2	6.1E-10	-	-	6.1E-10	6.1E-04	0.000%
Formaldehyde	50-00-0	3.2E-10	-	-	3.2E-10	3.2E-04	0.000%
Total PAHs [excluding naphthalene]	1151	4.1E-10	1.7E-09	1.5E-09	3.6E-09	3.6E-03	0.001%
Naphthalene	91-20-3	3.0E-11	-	-	3.0E-11	3.0E-05	0.0000%
Acetaldehyde	75-07-0	4.6E-11	-	-	4.6E-11	4.6E-05	0.0000%
Acrolein	107-02-8	-	-	-	-	-	-
Ammonia	7664-41-7	-	-	-	-	-	-
Ethylbenzene	100-41-4	5.9E-11	-	-	5.9E-11	5.9E-05	0.000%
Hexane	110-54-3	-	-	-	-	-	-
Toluene	108-88-3	-	-	-	-	-	-
Xylene	1330-20-7	-	-	-	-	-	-
Ethylene oxide	75-21-8	5.7E-04	-	-	5.7E-04	5.7E+02	99.987%
1,3-Butadiene	106-99-0	2.5E-10	-	-	2.5E-10	2.5E-04	0.000%
Cadmium	7440-43-9	4.3E-11	-	-	4.3E-11	4.3E-05	0.000%
Cr(VI)	18540-29-9	9.8E-11	2.1E-12	1.4E-13	1.0E-10	1.0E-04	0.000%
Arsenic	7440-38-2	2.7E-11	1.0E-10	4.0E-11	1.7E-10	1.7E-04	0.000%
Lead	7439-92-1	6.7E-13	2.9E-12	3.0E-13	3.9E-12	3.9E-06	0.0000%
Nickel	7440-02-0	6.8E-12	-	-	6.8E-12	6.8E-06	0.0000%
Copper	7440-50-8	-	-	-	-	-	-
HCl	7647-01-0	-	-	-	-	-	-
Manganese	7439-96-5	-	-	-	-	-	-
Mercury	7439-97-6	-	-	-	-	-	-
Selenium	7782-49-2	-	-	-	-	-	-
DieselExhPM	9901	7.1E-08	-	-	7.1E-08	7.1E-02	0.012%
	Total	5.7E-04	1.8E-09	1.5E-09	5.7E-04	568.04	100%

Abbreviations:

CAS = Chemical Abstract Service
m = meter
MEIW = Maximally Exposed Individual Worker
PAHs = Polycyclic aromatic hydrocarbons
UTM = Universal Transverse Mercator

Table 25
Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk MEIW
Sterigenics
Ontario, CA

Cancer Risk MEIW: Receptor #105							
UTM East (m): 449423.84, UTM North (m): 3768704.09							
DEV_ID	Source	Cancer Risk by Exposure Pathway			Total Cancer Risk	Total Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal			
ABATOR	Abator, R-G47352	1.4E-08	1.4E-10	1.2E-10	1.5E-08	1.5E-02	0.0%
CATOX	Catalytic Oxidizer, G52334	2.4E-09	2.4E-11	2.1E-11	2.5E-09	2.5E-03	0.000%
SCRUBBER	Scrubber, F98585	4.2E-06	-	-	4.2E-06	4.2E+00	0.7%
FUGITIVE	Fugitive Emissions	5.6E-04	-	-	5.6E-04	5.6E+02	99.2%
BOILER1	Boiler #1	1.7E-10	1.3E-10	1.1E-10	4.2E-10	4.2E-04	0.0%
BOILER2	Boiler #2	2.2E-10	1.7E-10	1.5E-10	5.4E-10	5.4E-04	0.0%
BOILER5	Boiler #5	2.4E-10	1.8E-10	1.6E-10	5.7E-10	5.7E-04	0.00%
BOILER6	Boiler #6	1.5E-10	1.1E-10	9.7E-11	3.6E-10	3.6E-04	0.00%
BOILER7	Boiler #7	1.5E-10	1.1E-10	9.9E-11	3.6E-10	3.6E-04	0.0%
ICE	ICE Emergency Generator	7.2E-08	9.6E-10	7.8E-10	7.3E-08	7.3E-02	0.0%
Total		5.7E-04	1.8E-09	1.5E-09	5.7E-04	568.0	100%

Abbreviations:

m = meter
MEIW = Maximally Exposed Individual Worker
UTM = Universal Transverse Mercator

Table 26
Excess Cancer Risk Contribution by Substance at the 2021 Modeled Cancer Risk MEISR
Sterigenics
Ontario, CA

Cancer Risk MEISR: Sensitive Receptor #1250									
UTM East (m): 448390, UTM North (m): 3767524									
Chemical Name	CAS Number / Pollutant ID	Excess Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Excess Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegrown Produce			
Benzene	71-43-2	1.4E-10	-	-	-	-	1.4E-10	1.4E-04	0.002%
Formaldehyde	50-00-0	6.9E-11	-	-	-	-	6.9E-11	6.9E-05	0.001%
Total PAHs [excluding naphthalene]	1151	6.5E-11	2.4E-10	6.0E-11	5.7E-10	1.6E-09	2.6E-09	2.6E-03	0.039%
Naphthalene	91-20-3	6.7E-12	-	-	-	-	6.7E-12	6.7E-06	0.000%
Acetaldehyde	75-07-0	8.8E-12	-	-	-	-	8.8E-12	8.8E-06	0.000%
Acrolein	107-02-8	-	-	-	-	-	-	-	-
Ammonia	7664-41-7	-	-	-	-	-	-	-	-
Ethylbenzene	100-41-4	1.5E-11	-	-	-	-	1.5E-11	1.5E-05	0.000%
Hexane	110-54-3	-	-	-	-	-	-	-	-
Toluene	108-88-3	-	-	-	-	-	-	-	-
Xylene	1330-20-7	-	-	-	-	-	-	-	-
Ethylene oxide	75-21-8	6.6E-06	-	-	-	-	6.6E-06	6.6E+00	99.865%
1,3-Butadiene	106-99-0	2.1E-11	-	-	-	-	2.1E-11	2.1E-05	0.000%
Cadmium	7440-43-9	3.7E-12	-	-	-	-	3.7E-12	3.7E-06	0.000%
Cr(VI)	18540-29-9	8.3E-12	1.5E-13	5.6E-15	-	6.2E-12	1.5E-11	1.5E-05	0.000%
Arsenic	7440-38-2	2.2E-12	1.7E-11	8.1E-13	-	1.4E-11	3.4E-11	3.4E-05	0.001%
Lead	7439-92-1	4.0E-14	4.9E-13	1.2E-14	8.9E-15	1.3E-13	6.8E-13	6.8E-07	0.0000%
Nickel	7440-02-0	5.8E-13	-	-	-	-	5.8E-13	5.8E-07	0.0000%
Copper	7440-50-8	-	-	-	-	-	-	-	-
HCl	7647-01-0	-	-	-	-	-	-	-	-
Manganese	7439-96-5	-	-	-	-	-	-	-	-
Mercury	7439-97-6	-	-	-	-	-	-	-	-
Selenium	7782-49-2	-	-	-	-	-	-	-	-
DieselExhPM	9901	6.0E-09	-	-	-	-	6.0E-09	6.0E-03	0.091%
Total		6.6E-06	2.6E-10	6.1E-11	5.7E-10	1.6E-09	6.6E-06	6.6	100%

Abbreviations:

CAS = Chemical Abstract Service
m = meter
MEISR = Maximally Exposed Individual Sensitive Receptor
PAHs = Polycyclic aromatic hydrocarbons
UTM = Universal Transverse Mercator

Table 27
Cancer Risk Contribution by Source at the 2021 Modeled Cancer Risk MEISR
Sterigenics
Ontario, CA

Cancer Risk MEISR: Sensitive Receptor #1250									
UTM East (m): 448390, UTM North (m): 3767524									
DEV_ID	Source	Cancer Risk by Exposure Pathway					Total Cancer Risk	Total Cancer Risk (number in one million)	Cancer Risk Contribution (%)
		Inhalation	Soil Ingestion	Dermal	Mother's Milk	Homegro wn Produce			
ABATOR	Abator, R-G47352	5.4E-09	4.5E-11	1.1E-11	1.1E-10	3.0E-10	5.9E-09	5.9E-03	0.1%
CATOX	Catalytic Oxidizer, G52334	4.9E-09	4.0E-11	1.0E-11	9.5E-11	2.7E-10	5.3E-09	5.3E-03	0.080%
SCRUBBER	Scrubber, F98585	1.4E-07	-	-	-	-	1.4E-07	1.4E-01	2.2%
FUGITIVE	Fugitive Emissions	6.4E-06	-	-	-	-	6.4E-06	6.4E+00	97.5%
BOILER1	Boiler #1	3.0E-11	1.9E-11	4.8E-12	4.5E-11	1.3E-10	2.3E-10	2.3E-04	0.0%
BOILER2	Boiler #2	3.0E-11	1.9E-11	4.8E-12	4.6E-11	1.3E-10	2.3E-10	2.3E-04	0.0%
BOILER5	Boiler #5	3.0E-11	1.9E-11	4.8E-12	4.6E-11	1.3E-10	2.3E-10	2.3E-04	0.00%
BOILER6	Boiler #6	2.9E-11	1.9E-11	4.7E-12	4.5E-11	1.3E-10	2.3E-10	2.3E-04	0.00%
BOILER7	Boiler #7	2.9E-11	1.9E-11	4.7E-12	4.5E-11	1.3E-10	2.3E-10	2.3E-04	0.0%
ICE	ICE Emergency Generator	6.1E-09	7.8E-11	1.6E-11	1.4E-10	4.3E-10	6.7E-09	6.7E-03	0.1%
Total		6.6E-06	2.6E-10	6.1E-11	5.7E-10	1.6E-09	6.6E-06	6.6	100%

Abbreviations:

m = meter

MEISR = Maximally Exposed Individual Sensitive Receptor

UTM = Universal Transverse Mercator

Table 28
Population Exposure within 2021 Modeled Zone of Impact^{1,2}
Sterigenics
Ontario, CA

Cancer Risk (number in one million)	Population
≥1 to <10	33,008
≥10 to <25	0
≥25 to <100	0
≥100 to <1000	0
≥1000	0
Total	33,008

Notes:

¹ Maximum Chronic and Acute HIs do not exceed 0.5, therefore corresponding population exposures are not applicable.

² The Zone of Impact is defined as the area subject to an added lifetime cancer risk (all pathways) of one in one million or greater ($\geq 1.0 \times 10^{-6}$) or a hazard index of greater than or equal to one half (≥ 0.5).

Abbreviations:

HI = Hazard Index

OEHHA = Office of Environmental Health Hazard Assessment

References:

Office of Environmental Health Hazard Assessment (OEHHA). 2015. Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessments. February. Available online at:
<https://oehha.ca.gov/media/downloads/crnrr/2015guidancemanual.pdf>.

Table 29
Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI PMI
Sterigenics
Ontario, CA

Chronic Risk PMI: Receptor #105														
UTM East (m): 449423.84, UTM North (m): 3768704.09														
Chemical Name	CAS Number / Pollutant ID	Chronic Hazard Quotients for Target Organs										Maximum Chronic HI ¹	Contribution (%)	
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Endocrine System	Blood			
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	-	3.6E-05	-	0.000%
Formaldehyde	50-00-0	-	-	-	-	-	-	3.1E-05	-	-	-	-	-	0.000%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	-	0.000%
Naphthalene	91-20-3	-	-	-	-	-	-	5.0E-07	-	-	-	-	-	0.000%
Acetaldehyde	75-07-0	-	-	-	-	-	-	5.8E-07	-	-	-	-	-	0.000%
Acrolein	107-02-8	-	-	-	-	-	-	1.0E-04	-	-	-	-	-	0.000%
Ammonia	7664-41-7	-	-	-	-	-	-	2.0E-04	-	-	-	-	-	0.000%
Ethylbenzene	100-41-4	-	-	6.0E-08	6.0E-08	6.0E-08	-	-	-	6.0E-08	-	-	-	0.000%
Hexane	110-54-3	-	1.2E-08	-	-	-	-	-	-	-	-	1.2E-08	-	0.00000%
Toluene	108-88-3	-	-	-	-	-	-	-	-	1.1E-06	-	-	-	0.000%
Xylene	1330-20-7	-	4.9E-07	-	-	-	-	4.9E-07	-	4.9E-07	-	-	4.9E-07	0.000%
Ethylene oxide	75-21-8	-	1.1E+00	-	-	-	-	-	-	-	-	-	1.1E+00	99.966%
1,3-Butadiene	106-99-0	-	-	-	-	3.7E-06	-	-	-	-	-	-	-	0.000%
Cadmium	7440-43-9	-	-	5.4E-06	-	-	-	2.6E-06	-	-	-	-	-	0.000%
Cr(VI)	18540-29-9	-	-	-	-	-	-	1.7E-08	-	-	-	4.9E-08	-	0.000%
Arsenic	7440-38-2	3.6E-04	3.6E-04	-	-	3.6E-04	3.6E-04	3.6E-04	3.6E-04	-	-	-	3.6E-04	0.033%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	-	0.000%
Nickel	7440-02-0	-	-	-	1.9E-07	9.5E-06	-	-	-	-	-	9.5E-06	-	0.000%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	-	0.000%
HCl	7647-01-0	-	-	-	-	7.1E-07	-	-	-	-	-	-	-	0.000%
Manganese	7439-96-5	-	1.2E-06	-	-	-	-	-	-	-	-	-	1.2E-06	0.000%
Mercury	7439-97-6	-	9.3E-06	-	9.3E-06	-	-	-	-	-	-	-	9.3E-06	0.001%
Selenium	7782-49-2	8.5E-07	8.5E-07	8.5E-07	-	-	-	-	-	-	-	-	8.5E-07	0.000%
DieselExhPM	9901	-	-	-	-	2.3E-04	-	-	-	-	-	-	-	0.000%
Total		3.6E-04	1.1E+00	6.3E-06	9.6E-06	6.0E-04	6.9E-04	3.6E-04	1.6E-06	6.0E-08	4.6E-05	1.1E+00	1.1E+00	

Notes:

¹Chronic HI results presented are for the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

- HI = Hazard Index
- m = meter
- PAHs = Polycyclic aromatic hydrocarbons
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 30
Chronic Health Quotients by Source at the 2021 Modeled Chronic HI PMI
Sterigenics
Ontario, CA

Chronic Risk PMI: Receptor #105													
UTM East (m): 449423.84, UTM North (m): 3768704.09													
DEV_ID	Source	Chronic Hazard Quotients for Target Organs										Maximum Chronic HI ¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Reproductive System/Developmental	Respiratory System	Skin	Eye	Endocrine System	Blood		
ABATOR	Abator, R-G47352	-	2.7E-05	9.9E-09	9.9E-09	9.9E-09	5.3E-05	-	2.6E-07	9.9E-09	5.5E-06	2.7E-05	0.003%
CATOX	Catalytic Oxidizer, G52334	-	4.6E-06	1.6E-09	1.6E-09	1.6E-09	8.8E-06	-	4.3E-08	1.6E-09	9.2E-07	4.6E-06	0.000%
SCRUBBER	Scrubber, F98585	-	8.0E-03	-	-	-	-	-	-	-	-	8.0E-03	0.741%
FUGITIVE	Fugitive Emissions	-	1.1E+00	-	-	-	-	-	-	-	-	1.1E+00	99.222%
BOILER1	Boiler #1	-	7.6E-08	9.1E-09	9.1E-09	9.1E-09	4.9E-05	-	2.4E-07	9.1E-09	5.1E-06	7.6E-08	0.0000%
BOILER2	Boiler #2	-	9.8E-08	1.2E-08	1.2E-08	1.2E-08	6.3E-05	-	3.1E-07	1.2E-08	6.6E-06	9.8E-08	0.0000%
BOILER5	Boiler #5	-	1.0E-07	1.2E-08	1.2E-08	1.2E-08	6.7E-05	-	3.3E-07	1.2E-08	7.0E-06	1.0E-07	0.000%
BOILER6	Boiler #6	-	6.5E-08	7.7E-09	7.7E-09	7.7E-09	4.2E-05	-	2.0E-07	7.7E-09	4.3E-06	6.5E-08	0.0000%
BOILER7	Boiler #7	-	6.6E-08	7.9E-09	7.9E-09	7.9E-09	4.2E-05	-	2.1E-07	7.9E-09	4.4E-06	6.6E-08	0.0000%
ICE	ICE Emergency Generator	3.6E-04	3.7E-04	1.5E-05	8.5E-07	3.7E-04	6.1E-04	3.6E-04	1.1E-08	1.9E-10	1.2E-05	3.7E-04	0.034%
Total		3.6E-04	1.1E+00	1.5E-05	9.1E-07	3.7E-04	9.3E-04	3.6E-04	1.6E-06	6.0E-08	4.6E-05	1.1E+00	100%

Notes:

¹ Chronic HI results presented are for the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

- HI = Hazard Index
- m = meter
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 31
Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI MEIR
Sterigenics
Ontario, CA

Chronic Risk MEIR: Receptor #1468													
UTM East (m): 453640, UTM North (m): 3769024													
Chemical Name	CAS Number / Pollutant ID	Chronic Hazard Quotients for Target Organs									Maximum Chronic HI ¹	Contribution (%)	
		Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Endocrine System	Blood			
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	3.6E-07	-	0%
Formaldehyde	50-00-0	-	-	-	-	2.7E-07	-	-	-	-	-	-	0%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	4.6E-09	-	-	-	-	-	-	0%
Acetaldehyde	75-07-0	-	-	-	-	4.5E-09	-	-	-	-	-	-	0%
Acrolein	107-02-8	-	-	-	-	1.0E-06	-	-	-	-	-	-	0%
Ammonia	7664-41-7	-	-	-	-	2.1E-06	-	-	-	-	-	-	0%
Ethylbenzene	100-41-4	-	6.4E-10	6.4E-10	6.4E-10	-	-	-	6.4E-10	-	-	-	0%
Hexane	110-54-3	1.2E-10	-	-	-	-	-	-	-	-	1.2E-10	-	0.00003%
Toluene	108-88-3	-	-	-	-	-	-	1.2E-08	-	-	-	-	0%
Xylene	1330-20-7	5.2E-09	-	-	-	5.2E-09	-	5.2E-09	-	-	5.2E-09	-	0.001%
Ethylene oxide	75-21-8	3.7E-04	-	-	-	-	-	-	-	-	3.7E-04	-	99.789%
1,3-Butadiene	106-99-0	-	-	-	7.9E-09	-	-	-	-	-	-	-	0%
Cadmium	7440-43-9	-	1.1E-08	-	-	5.4E-09	-	-	-	-	-	-	0%
Cr(VI)	18540-29-9	-	-	-	-	3.6E-11	-	-	-	-	1.0E-10	-	0%
Arsenic	7440-38-2	7.5E-07	-	-	7.5E-07	7.5E-07	7.5E-07	-	-	-	-	7.5E-07	0.203%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	-	4.0E-10	2.0E-08	-	-	-	-	2.0E-08	-	0%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	0%
HCl	7647-01-0	-	-	-	-	1.5E-09	-	-	-	-	-	-	0%
Manganese	7439-96-5	2.5E-09	-	-	-	-	-	-	-	-	2.5E-09	-	0.001%
Mercury	7439-97-6	2.0E-08	2.0E-08	-	2.0E-08	-	-	-	-	-	2.0E-08	-	0.005%
Selenium	7782-49-2	1.8E-09	-	1.8E-09	-	-	-	-	-	-	1.8E-09	-	0.000%
DieselExhPM	9901	-	-	-	-	4.9E-07	-	-	-	-	-	-	0%
Total		3.7E-04	3.2E-08	2.4E-09	7.8E-07	4.7E-06	7.5E-07	1.7E-08	6.4E-10	3.8E-07	3.7E-04	100%	

Notes:

¹Chronic HI results presented are for the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIW = Maximally Exposed Individual Resident
- PAHs = Polycyclic aromatic hydrocarbons
- UTM = Universal Transverse Mercator

Table 32
Chronic Health Quotients by Source at the 2021 Modeled Chronic HI MEIR
Sterigenics
Ontario, CA

Chronic Risk MEIR: Receptor #1468													
UTM East (m): 453640, UTM North (m): 3769024													
DEV_ID	Source	Chronic Hazard Quotients for Target Organs										Maximum Chronic HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Endocrine System	Blood		
ABATOR	Abator, R-G47352	-	6.1E-07	2.2E-10	2.2E-10	2.2E-10	1.2E-06	-	5.8E-09	2.2E-10	1.2E-07	6.1E-07	0.164%
CATOX	Catalytic Oxidizer, G52334	-	6.0E-07	2.1E-10	2.1E-10	2.1E-10	1.2E-06	-	5.7E-09	2.1E-10	1.2E-07	6.0E-07	0.160%
SCRUBBER	Scrubber, F98585	-	7.1E-06	-	-	-	-	-	-	-	-	7.1E-06	1.917%
FUGITIVE	Fugitive Emissions	-	3.6E-04	-	-	-	-	-	-	-	-	3.6E-04	97.548%
BOILER1	Boiler #1	-	3.4E-10	4.0E-11	4.0E-11	4.0E-11	2.2E-07	-	1.1E-09	4.0E-11	2.3E-08	3.4E-10	0.000%
BOILER2	Boiler #2	-	3.4E-10	4.1E-11	4.1E-11	4.1E-11	2.2E-07	-	1.1E-09	4.1E-11	2.3E-08	3.4E-10	0.000%
BOILER5	Boiler #5	-	3.3E-10	4.0E-11	4.0E-11	4.0E-11	2.2E-07	-	1.1E-09	4.0E-11	2.2E-08	3.3E-10	0.000%
BOILER6	Boiler #6	-	3.4E-10	4.0E-11	4.0E-11	4.0E-11	2.2E-07	-	1.1E-09	4.0E-11	2.2E-08	3.4E-10	0.000%
BOILER7	Boiler #7	-	3.4E-10	4.0E-11	4.0E-11	4.0E-11	2.2E-07	-	1.1E-09	4.0E-11	2.3E-08	3.4E-10	0.000%
ICE	ICE Emergency Generator	7.6E-07	7.8E-07	3.1E-08	1.8E-09	7.8E-07	1.3E-06	7.5E-07	2.3E-11	3.9E-13	2.5E-08	7.8E-07	0.209%
Total		7.6E-07	3.7E-04	3.2E-08	2.4E-09	7.8E-07	4.7E-06	7.5E-07	1.7E-08	6.4E-10	3.8E-07	3.7E-04	100%

Notes:

¹ Chronic HI results presented are for the the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIR = Maximally Exposed Individual Resident
- UTM = Universal Transverse Mercator

Table 33
Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI MEIW
Sterigenics
Ontario, CA

Chronic Risk MEIW: Receptor #105													
UTM East (m): 449423.84, UTM North (m): 3768704.09													
Chronic Hazard Quotients for Target Organs													
Chemical Name	CAS Number / Pollutant ID	Cardio-Vasucelar (CV)	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Repro-ductive System/ Develop-mental	Respiratory System	Skin	Eye	Endocrine System	Blood	Maximum Chronic HI ¹	Contribution (%)
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	3.6E-05	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	3.1E-05	-	-	-	-	-	0%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	5.0E-07	-	-	-	-	-	0%
Acetaldehyde	75-07-0	-	-	-	-	-	5.8E-07	-	-	-	-	-	0%
Acrolein	107-02-8	-	-	-	-	-	1.0E-04	-	-	-	-	-	0%
Ammonia	7664-41-7	-	-	-	-	-	2.0E-04	-	-	-	-	-	0%
Ethylbenzene	100-41-4	-	-	6.0E-08	6.0E-08	6.0E-08	-	-	-	6.0E-08	-	-	0%
Hexane	110-54-3	-	1.2E-08	-	-	-	-	-	-	-	-	1.2E-08	0.00000%
Toluene	108-88-3	-	-	-	-	-	-	-	1.1E-06	-	-	-	0%
Xylene	1330-20-7	-	4.9E-07	-	-	-	4.9E-07	-	4.9E-07	-	-	4.9E-07	0.000%
Ethylene oxide	75-21-8	-	1.1E+00	-	-	-	-	-	-	-	-	1.1E+00	99.990%
1,3-Butadiene	106-99-0	-	-	-	-	3.7E-06	-	-	-	-	-	-	0%
Cadmium	7440-43-9	-	-	3.1E-06	-	-	2.6E-06	-	-	-	-	-	0%
Cr(VI)	18540-29-9	-	-	-	-	-	1.7E-08	-	-	-	9.3E-10	-	0%
Arsenic	7440-38-2	1.0E-04	1.0E-04	-	-	1.0E-04	1.0E-04	1.0E-04	-	-	-	1.0E-04	0.010%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	-	-	6.6E-08	9.5E-06	-	-	-	9.5E-06	-	0%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	0%
HCl	7647-01-0	-	-	-	-	-	7.1E-07	-	-	-	-	-	0%
Manganese	7439-96-5	-	1.2E-06	-	-	-	-	-	-	-	-	1.2E-06	0.000%
Mercury	7439-97-6	-	4.8E-06	4.8E-06	-	4.8E-06	-	-	-	-	-	4.8E-06	0.000%
DieselExhPM	9901	-	-	-	-	-	2.3E-04	-	-	-	-	-	0%
Total		1.0E-04	1.1E+00	7.9E-06	1.5E-07	1.1E-04	6.8E-04	1.0E-04	1.6E-06	6.0E-08	4.5E-05	1.1E+00	1.1E+00

Notes:

¹Chronic HI results presented are for the the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIW = Maximally Exposed Individual Resident
- PAHs = Polycyclic aromatic hydrocarbons
- UTM = Universal Transverse Mercator

Table 34
Chronic Health Quotients by Source at the 2021 Modeled Chronic HI MEIW
Sterigenics
Ontario, CA

Chronic Risk MEIW: Receptor #105												
UTM East (m): 449423.84, UTM North (m): 3768704.09												
DEV_ID	Source	Chronic Hazard Quotients for Target Organs									Maximum Chronic HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Reproductive System/Developmental	Respiratory System	Eye	Endocrine System	Blood		
ABATOR	Abator, R-G47352	-	2.7E-05	9.9E-09	9.9E-09	9.9E-09	5.3E-05	2.6E-07	9.9E-09	5.5E-06	2.7E-05	0.003%
CATOX	Catalytic Oxidizer, G52334	-	4.6E-06	1.6E-09	1.6E-09	1.6E-09	8.8E-06	4.3E-08	1.6E-09	9.2E-07	4.6E-06	0.000%
SCRUBBER	Scrubber, F98585	-	8.0E-03	-	-	-	-	-	-	-	8.0E-03	0.742%
FUGITIVE	Fugitive Emissions	-	1.1E+00	-	-	-	-	-	-	-	1.1E+00	99.245%
BOILER1	Boiler #1	-	7.6E-08	9.1E-09	9.1E-09	9.1E-09	4.9E-05	2.4E-07	9.1E-09	5.1E-06	7.6E-08	0.0000%
BOILER2	Boiler #2	-	9.8E-08	1.2E-08	1.2E-08	1.2E-08	6.3E-05	3.1E-07	1.2E-08	6.6E-06	9.8E-08	0.0000%
BOILER5	Boiler #5	-	1.0E-07	1.2E-08	1.2E-08	1.2E-08	6.7E-05	3.3E-07	1.2E-08	7.0E-06	1.0E-07	0.000%
BOILER6	Boiler #6	-	6.5E-08	7.7E-09	7.7E-09	7.7E-09	4.2E-05	2.0E-07	7.7E-09	4.3E-06	6.5E-08	0.0000%
BOILER7	Boiler #7	-	6.6E-08	7.9E-09	7.9E-09	7.9E-09	4.2E-05	2.1E-07	7.9E-09	4.4E-06	6.6E-08	0.0000%
ICE	ICE Emergency Generator	1.0E-04	1.1E-04	7.9E-06	8.9E-08	1.1E-04	3.6E-04	1.1E-08	1.9E-10	1.2E-05	1.1E-04	0.010%
Total		1.0E-04	1.1E+00	7.9E-06	1.5E-07	1.1E-04	6.8E-04	1.6E-06	6.0E-08	4.5E-05	1.1E+00	100%

Notes:

¹ Chronic HI results presented are for the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

HI = Hazard Index
m = meter
MEIW = Maximally Exposed Individual Worker
UTM = Universal Transverse Mercator

Table 35
Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled Chronic HI MEISR
Sterigenics
Ontario, CA

Chronic Risk MEISR: Sensitive Receptor #1250												
UTM East (m): 448390, UTM North (m): 3767524												
Chronic Hazard Quotients for Target Organs												
Chemical Name	CAS Number / Pollutant ID	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Endocrine System	Blood	Maximum Chronic HI ¹	Contribution (%)
Benzene	71-43-2	-	-	-	-	-	-	-	-	7.1E-07	-	0%
Formaldehyde	50-00-0	-	-	-	-	5.4E-07	-	-	-	-	-	0%
Total PAHs [excluding naphthalen	1151	-	-	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	9.2E-09	-	-	-	-	-	0%
Acetaldehyde	75-07-0	-	-	-	-	9.3E-09	-	-	-	-	-	0%
Acrolein	107-02-8	-	-	-	-	2.0E-06	-	-	-	-	-	0%
Ammonia	7664-41-7	-	-	-	-	4.2E-06	-	-	-	-	-	0%
Ethylbenzene	100-41-4	-	1.2E-09	1.2E-09	1.2E-09	-	-	-	1.2E-09	-	-	0%
Hexane	110-54-3	2.3E-10	-	-	-	-	-	-	-	-	2.3E-10	0.00002%
Toluene	108-88-3	-	-	-	-	-	-	2.3E-08	-	-	-	0%
Xylene	1330-20-7	1.0E-08	-	-	-	1.0E-08	-	1.0E-08	-	-	1.0E-08	0.001%
Ethylene oxide	75-21-8	1.0E-03	-	-	-	-	-	-	-	-	1.0E-03	99.753%
1,3-Butadiene	106-99-0	-	-	-	2.6E-08	-	-	-	-	-	-	0%
Cadmium	7440-43-9	-	3.8E-08	-	-	1.8E-08	-	-	-	-	-	0%
Cr(VI)	18540-29-9	-	-	-	-	1.2E-10	-	-	-	3.4E-10	-	0%
Arsenic	7440-38-2	2.5E-06	-	-	2.5E-06	2.5E-06	2.5E-06	-	-	-	2.5E-06	0.238%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	-	1.3E-09	6.7E-08	-	-	-	6.7E-08	-	0%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	0%
HCl	7647-01-0	-	-	-	-	5.0E-09	-	-	-	-	-	0%
Manganese	7439-96-5	8.3E-09	-	-	-	-	-	-	-	-	8.3E-09	0.001%
Mercury	7439-97-6	6.5E-08	6.5E-08	-	6.5E-08	-	-	-	-	-	6.5E-08	0.006%
Selenium	7782-49-2	5.9E-09	-	5.9E-09	-	-	-	-	-	-	5.9E-09	0.001%
DieselExhPM	9901	-	-	-	-	1.6E-06	-	-	-	-	-	0%
Total		1.0E-03	1.0E-07	7.2E-09	2.6E-06	1.1E-05	2.5E-06	3.3E-08	1.2E-09	7.8E-07	1.0E-03	100%

Notes:

¹Chronic HI results presented are for the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

- HI = Hazard Index
- m = meter
- MEISR = Maximally Exposed Individual Sensitive Receptor
- PAHs = Polycyclic aromatic hydrocarbons
- UTM = Universal Transverse Mercator

Table 36
Chronic Health Quotients by Source at the 2021 Modeled Chronic HI MEISR
Sterigenics
Ontario, CA

Chronic Risk MEISR: Sensitive Receptor #1250												
UTM East (m): 448390, UTM North (m): 3767524												
DEV_ID	Source	Chronic Hazard Quotients for Target Organs									Maximum Chronic HI ¹	Contribution (%)
		Cardio-Vasucilar (CV)	Central Nervous System (CNS)	Kidney	Gastro-Intestinal (GILV)	Repro-ductive System/Develop-mental	Respiratory System	Eye	Endocrine System	Blood		
ABATOR	Abator, R-G47352	-	8.5E-07	3.1E-10	3.1E-10	3.1E-10	1.7E-06	8.1E-09	3.1E-10	1.7E-07	1.7E-06	0.2%
CATOX	Catalytic Oxidizer, G52334	-	7.7E-07	2.7E-10	2.7E-10	2.7E-10	1.5E-06	7.3E-09	2.7E-10	1.5E-07	1.5E-06	0.1%
SCRUBBER	Scrubber, F98585	-	2.3E-05	-	-	-	-	-	-	-	2.3E-05	2.2%
FUGITIVE	Fugitive Emissions	-	1.0E-03	-	-	-	-	-	-	-	1.0E-03	97.4%
BOILER1	Boiler #1	-	1.1E-09	1.3E-10	1.3E-10	1.3E-10	7.1E-07	3.5E-09	1.3E-10	7.3E-08	7.1E-07	0.1%
BOILER2	Boiler #2	-	1.1E-09	1.3E-10	1.3E-10	1.3E-10	7.2E-07	3.5E-09	1.3E-10	7.5E-08	7.2E-07	0.1%
BOILERS5	Boiler #5	-	1.1E-09	1.3E-10	1.3E-10	1.3E-10	7.1E-07	3.5E-09	1.3E-10	7.4E-08	7.1E-07	0.1%
BOILER6	Boiler #6	-	1.1E-09	1.3E-10	1.3E-10	1.3E-10	7.0E-07	3.4E-09	1.3E-10	7.2E-08	7.0E-07	0.1%
BOILER7	Boiler #7	-	1.1E-09	1.3E-10	1.3E-10	1.3E-10	7.0E-07	3.4E-09	1.3E-10	7.3E-08	7.0E-07	0.1%
ICE	ICE Emergency Generator	2.5E-06	2.6E-06	1.0E-07	5.9E-09	2.6E-06	4.3E-06	7.5E-11	1.3E-12	8.2E-08	4.3E-06	0.4%
Total		2.5E-06	1.0E-03	1.0E-07	7.2E-09	2.6E-06	1.1E-05	3.3E-08	1.2E-09	7.8E-07	1.0E-03	101%

Notes:

¹ Chronic HI results presented are for the the highest impact target organ, Central Nervous System (CNS).

Abbreviations:

HI = Hazard Index

m = meter

MEISR = Maximally Exposed Individual Sensitive Receptor

UTM = Universal Transverse Mercator

Table 37
8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI PMI
Sterigenics
Ontario, CA

8-hr Chronic HI PMI: Receptor #111													
UTM East (m): 449344.72, UTM North (m): 3768650.38													
Chemical Name	CAS Number / Pollutant ID	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI ¹	Contribution (%)	
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Blood			
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	4.6E-05	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	3.6E-05	-	-	-	-	3.6E-05	34.0%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75-07-0	-	-	-	-	-	3.0E-07	-	-	-	-	3.0E-07	0.3%
Acrolein	107-02-8	-	-	-	-	-	6.5E-05	-	-	-	-	6.5E-05	61.9%
Ammonia	7664-41-7	-	-	-	-	-	-	-	-	-	-	-	0%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	-	-	-	-	-	-	7.3E-07	-	-	-	0%
Xylene	1330-20-7	-	-	-	-	-	-	-	-	-	-	-	0%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	-	5.7E-07	-	-	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	2.5E-06	2.5E-06	-	-	2.5E-06	2.5E-06	2.5E-06	-	-	-	2.5E-06	2.4%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	0.0%
Nickel	7440-02-0	-	-	1.5E-06	-	-	1.5E-06	-	-	-	-	1.5E-06	1.4%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	0.0%
HCl	7647-01-0	-	-	-	-	-	-	-	-	-	-	-	0.0%
Manganese	7439-96-5	-	4.3E-07	-	-	-	-	-	-	-	-	-	0.0%
Mercury	7439-97-6	-	7.8E-07	-	7.8E-07	7.8E-07	-	-	-	-	-	-	0.0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	-	-	-	0.0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	-	-	-	0.0%
Total		2.5E-06	3.7E-06	1.5E-06	7.8E-07	3.8E-06	1.1E-04	2.5E-06	7.3E-07	4.6E-05	1.1E-04	100%	

Notes:

¹ 8-hr Chronic HI results presented are for the the highest impact target organ, Respiratory System.

Abbreviations:

- HI = Hazard Index
- m = meter
- PAHs = Polycyclic aromatic hydrocarbons
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 38
8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI PMI
Sterigenics
Ontario, CA

8-hr Chronic HI PMI: Receptor #111												
UTM East (m): 449344.72, UTM North (m): 3768650.38												
8-hr Chronic Hazard Quotients for Target Organs												
DEV_ID	Source	Cardio-Vasucular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Repro-ductive System/ Develop-mental	Respiratory System	Skin	Eye	Blood	Maximum 8-hr Chronic HI ¹	Contribution (%)
ABATOR	Abator, R-G47352	-	-	-	-	-	1.7E-05	-	1.3E-07	8.0E-06	1.7E-05	16.5%
CATOX	Catalytic Oxidizer, G52334	-	-	-	-	-	2.4E-05	-	1.8E-07	1.1E-05	2.4E-05	22.9%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	-	-	-	-	8.5E-06	-	6.5E-08	3.9E-06	8.5E-06	8.1%
BOILER2	Boiler #2	-	-	-	-	-	1.1E-05	-	8.1E-08	4.9E-06	1.1E-05	10.1%
BOILER5	Boiler #5	-	-	-	-	-	1.3E-05	-	9.8E-08	5.9E-06	1.3E-05	12.2%
BOILER6	Boiler #6	-	-	-	-	-	1.1E-05	-	8.2E-08	4.9E-06	1.1E-05	10.2%
BOILER7	Boiler #7	-	-	-	-	-	1.1E-05	-	8.8E-08	5.3E-06	1.1E-05	10.9%
ICE	ICE Emergency Generator	2.5E-06	3.7E-06	1.5E-06	7.8E-07	3.8E-06	9.7E-06	2.5E-06	3.0E-09	1.5E-06	9.7E-06	9.2%
Total		2.5E-06	3.7E-06	1.5E-06	7.8E-07	3.8E-06	1.1E-04	2.5E-06	7.3E-07	4.6E-05	1.1E-04	100%

Notes:

¹ 8-hr Chronic HI results presented are for the the highest impact target organ, Respiratory System.

Abbreviations:

HI = Hazard Index

m = meter

PMI = Point of Maximum Impact

UTM = Universal Transverse Mercator

Table 39
8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI MEIR
Sterigenics
Ontario, CA

8-hr Chronic HI MEIR: Receptor #1468													
UTM East (m): 453640, UTM North (m): 3769024													
Chemical Name	CAS Number / Pollutant ID	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI ¹	Contribution (%)	
		Cardio-Vasucular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Blood			
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	3.6E-07	-	0.0%
Formaldehyde	50-00-0	-	-	-	-	-	2.7E-07	-	-	-	-	2.7E-07	33.3%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	0.0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	-	-	-	0.0%
Acetaldehyde	75070	-	-	-	-	-	2.1E-09	-	-	-	-	2.1E-09	0.3%
Acrolein	107-02-8	-	-	-	-	-	5.2E-07	-	-	-	-	5.2E-07	64.9%
Ammonia	7664-41-7	-	-	-	-	-	-	-	-	-	-	-	0.0%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	-	-	-	0.0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	-	-	-	0.0%
Toluene	108-88-3	-	-	-	-	-	-	-	5.9E-09	-	-	-	0.0%
Xylene	1330-20-7	-	-	-	-	-	-	-	-	-	-	-	0.0%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	-	-	-	0.0%
1,3-Butadiene	106-99-0	-	-	-	-	1.8E-09	-	-	-	-	-	-	0.0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	-	-	-	0.0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	-	-	-	0.0%
Arsenic	7440-38-2	7.7E-09	7.7E-09	-	-	7.7E-09	7.7E-09	7.7E-09	-	-	-	7.7E-09	1.0%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	0.0%
Nickel	7440-02-0	-	-	4.7E-09	-	-	4.7E-09	-	-	-	-	4.7E-09	0.6%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	0.0%
HCl	7647-01-0	-	-	-	-	-	-	-	-	-	-	-	0.0%
Manganese	7439-96-5	-	1.3E-09	-	-	-	-	-	-	-	-	-	0.0%
Mercury	7439-97-6	-	2.4E-09	-	2.4E-09	2.4E-09	-	-	-	-	-	-	0.0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	-	-	-	0.0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	-	-	-	0.0%
Total		7.7E-09	1.1E-08	4.7E-09	2.4E-09	1.2E-08	8.0E-07	7.7E-09	5.9E-09	3.6E-07	8.0E-07	100%	

Notes:

¹ 8-hr Chronic HI results presented are for the the highest impact target organ, Respiratory System.

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIR = Maximally Exposed Individual Resident
- PAHs = Polycyclic aromatic hydrocarbons
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 40
8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI MEIR
Sterigenics
Ontario, CA

8-hr Chronic HI MEIR: Receptor #1468												
UTM East (m): 453640, UTM North (m): 3769024												
DEV_ID	Source	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Blood		
ABATOR	Abator, R-G47352	-	-	-	-	-	2.7E-07	-	2.0E-09	1.2E-07	2.7E-07	33.4%
CATOX	Catalytic Oxidizer, G52334	-	-	-	-	-	2.6E-07	-	2.0E-09	1.2E-07	2.6E-07	32.3%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	-	-	0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	-	-	0%
BOILER1	Boiler #1	-	-	-	-	-	4.9E-08	-	3.8E-10	2.3E-08	4.9E-08	6.1%
BOILER2	Boiler #2	-	-	-	-	-	4.9E-08	-	3.8E-10	2.3E-08	4.9E-08	6.2%
BOILER5	Boiler #5	-	-	-	-	-	4.8E-08	-	3.7E-10	2.2E-08	4.8E-08	6.1%
BOILER6	Boiler #6	-	-	-	-	-	4.9E-08	-	3.7E-10	2.2E-08	4.9E-08	6.1%
BOILER7	Boiler #7	-	-	-	-	-	4.9E-08	-	3.7E-10	2.3E-08	4.9E-08	6.1%
ICE	ICE Emergency Generator	7.7E-09	1.1E-08	4.7E-09	2.4E-09	1.2E-08	3.0E-08	7.7E-09	9.2E-12	4.5E-09	3.0E-08	3.8%
Total		7.7E-09	1.1E-08	4.7E-09	2.4E-09	1.2E-08	8.0E-07	7.7E-09	5.9E-09	3.6E-07	8.0E-07	100%

Notes:

¹ 8-hr Chronic HI results presented are for the highest impact target organ, Respiratory System.

Abbreviations:

HI = Hazard Index

m = meter

MEIR = Maximally Exposed Individual Resident

UTM = Universal Transverse Mercator

Table 41
8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI MEIW
Sterigenics
Ontario, CA

8-hr Chronic HI MEIW: Receptor #111													
UTM East (m): 449344.72, UTM North (m): 3768650.38													
Chemical Name	CAS Number / Pollutant ID	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI ¹	Contribution (%)	
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Blood			
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	4.6E-05	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	3.6E-05	-	-	-	-	3.6E-05	34.0%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75070	-	-	-	-	-	3.0E-07	-	-	-	-	3.0E-07	0.3%
Acrolein	107-02-8	-	-	-	-	-	6.5E-05	-	-	-	-	6.5E-05	61.9%
Ammonia	7664-41-7	-	-	-	-	-	-	-	-	-	-	-	0%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	-	-	-	-	-	-	-	7.3E-07	-	-	0%
Xylene	1330-20-7	-	-	-	-	-	-	-	-	-	-	-	0%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	-	5.7E-07	-	-	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	2.5E-06	2.5E-06	-	-	2.5E-06	2.5E-06	2.5E-06	-	-	-	2.5E-06	2.4%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	1.5E-06	-	-	1.5E-06	-	-	-	-	1.5E-06	1.4%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	0%
HCl	7647-01-0	-	-	-	-	-	-	-	-	-	-	-	0%
Manganese	7439-96-5	-	4.3E-07	-	-	-	-	-	-	-	-	-	0%
Mercury	7439-97-6	-	7.8E-07	-	7.8E-07	7.8E-07	-	-	-	-	-	-	0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	-	-	-	0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	-	-	-	0%
Total		2.5E-06	3.7E-06	1.5E-06	7.8E-07	3.8E-06	1.1E-04	2.5E-06	7.3E-07	4.6E-05	1.1E-04	100%	

Notes:

¹ 8-hr Chronic HI results presented are for the highest impact target organ, Respiratory System.

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIW = Maximally Exposed Individual Worker
- PAHs = Polycyclic aromatic hydrocarbons
- UTM = Universal Transverse Mercator

Table 42
8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI MEIW
Sterigenics
Ontario, CA

8-hr Chronic HI MEIW: Receptor #111												
UTM East (m): 449344.72, UTM North (m): 3768650.38												
DEV_ID	Source	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/Developmental	Respiratory System	Skin	Eye	Blood		
ABATOR	Abator, R-G47352	-	-	-	-	-	1.7E-05	-	1.3E-07	8.0E-06	1.7E-05	16.5%
CATOX	Catalytic Oxidizer, G52334	-	-	-	-	-	2.4E-05	-	1.8E-07	1.1E-05	2.4E-05	22.9%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	-	-	-	-	8.5E-06	-	6.5E-08	3.9E-06	8.5E-06	8.1%
BOILER2	Boiler #2	-	-	-	-	-	1.1E-05	-	8.1E-08	4.9E-06	1.1E-05	10.1%
BOILER5	Boiler #5	-	-	-	-	-	1.3E-05	-	9.8E-08	5.9E-06	1.3E-05	12.2%
BOILER6	Boiler #6	-	-	-	-	-	1.1E-05	-	8.2E-08	4.9E-06	1.1E-05	10.2%
BOILER7	Boiler #7	-	-	-	-	-	1.1E-05	-	8.8E-08	5.3E-06	1.1E-05	10.9%
ICE	ICE Emergency Generator	2.5E-06	3.7E-06	1.5E-06	7.8E-07	3.8E-06	9.7E-06	2.5E-06	3.0E-09	1.5E-06	9.7E-06	9.2%
Total		2.5E-06	3.7E-06	1.5E-06	7.8E-07	3.8E-06	1.1E-04	2.5E-06	7.3E-07	4.6E-05	1.1E-04	100%

Notes:

¹ 8-hr Chronic HI results presented are for the highest impact target organ, Respiratory System.

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIW = Maximally Exposed Individual Worker
- UTM = Universal Transverse Mercator

Table 43
8-hr Chronic Health Quotients by Substance and Target Organ at the 2021 Modeled 8-hr Chronic HI MEISR
Sterigenics
Ontario, CA

8-hr Chronic HI MEISR: Receptor #1250													
UTM East (m): 448390, UTM North (m): 3767524													
Chemical Name	CAS Number / Pollutant ID	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI ¹	Contribution (%)	
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/ Developmental	Respiratory System	Skin	Eye	Blood			
Benzene	71-43-2	-	-	-	-	-	-	-	-	-	7.1E-07	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	5.4E-07	-	-	-	-	5.4E-07	33.6%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75070	-	-	-	-	-	4.4E-09	-	-	-	-	4.4E-09	0.3%
Acrolein	107-02-8	-	-	-	-	-	1.0E-06	-	-	-	-	1.0E-06	63.5%
Ammonia	7664-41-7	-	-	-	-	-	-	-	-	-	-	-	0%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	-	-	-	-	-	-	1.1E-08	-	-	-	0%
Xylene	1330-20-7	-	-	-	-	-	-	-	-	-	-	-	0%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	-	5.8E-09	-	-	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	2.6E-08	2.6E-08	-	-	2.6E-08	2.6E-08	2.6E-08	-	-	-	2.6E-08	1.6%
Lead	7439-92-1	-	-	-	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	1.6E-08	-	-	1.6E-08	-	-	-	-	1.6E-08	1.0%
Copper	7440-50-8	-	-	-	-	-	-	-	-	-	-	-	0%
HCl	7647-01-0	-	-	-	-	-	-	-	-	-	-	-	0%
Manganese	7439-96-5	-	4.4E-09	-	-	-	-	-	-	-	-	-	0%
Mercury	7439-97-6	-	8.0E-09	-	8.0E-09	8.0E-09	-	-	-	-	-	-	0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	-	-	-	0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	-	-	-	0%
Total		2.6E-08	3.8E-08	1.6E-08	8.0E-09	3.9E-08	1.6E-06	2.6E-08	1.1E-08	7.1E-07	1.6E-06	100%	

Notes:

¹ 8-hr Chronic HI results presented are for the highest impact target organ, Respiratory System.

Abbreviations:

- HI = Hazard Index
- m = meter
- MEISR = Maximally Exposed Individual Sensitive Receptor
- PAHs = Polycyclic aromatic hydrocarbons
- UTM = Universal Transverse Mercator

Table 44
8-hr Chronic Health Quotients by Source at the 2021 Modeled 8-hr Chronic HI MEISR
Sterigenics
Ontario, CA

8-hr Chronic HI MEISR: Receptor #1250												
UTM East (m): 448390, UTM North (m): 3767524												
DEV_ID	Source	8-hr Chronic Hazard Quotients for Target Organs									Maximum 8-hr Chronic HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Kidney	Reproductive System/Developmental	Respiratory System	Skin	Eye	Blood		
ABATOR	Abator, R-G47352	-	-	-	-	-	3.7E-07	-	2.8E-09	1.7E-07	3.7E-07	23.3%
CATOX	Catalytic Oxidizer, G52334	-	-	-	-	-	3.3E-07	-	2.5E-09	1.5E-07	3.3E-07	20.8%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	-	-	-	-	1.6E-07	-	1.2E-09	7.3E-08	1.6E-07	9.9%
BOILER2	Boiler #2	-	-	-	-	-	1.6E-07	-	1.2E-09	7.5E-08	1.6E-07	10.1%
BOILER5	Boiler #5	-	-	-	-	-	1.6E-07	-	1.2E-09	7.4E-08	1.6E-07	10.0%
BOILER6	Boiler #6	-	-	-	-	-	1.6E-07	-	1.2E-09	7.2E-08	1.6E-07	9.8%
BOILER7	Boiler #7	-	-	-	-	-	1.6E-07	-	1.2E-09	7.3E-08	1.6E-07	9.9%
ICE	ICE Emergency Generator	2.6E-08	3.8E-08	1.6E-08	8.0E-09	3.9E-08	1.0E-07	2.6E-08	3.1E-11	1.5E-08	1.0E-07	6.2%
Total		2.6E-08	3.8E-08	1.6E-08	8.0E-09	3.9E-08	1.6E-06	2.6E-08	1.1E-08	7.1E-07	1.6E-06	100%

Notes:

¹ 8-hr Chronic HI results presented are for the highest impact target organ, Respiratory System.

Abbreviations:

HI = Hazard Index

m = meter

MEISR = Maximally Exposed Individual Sensitive Receptor

UTM = Universal Transverse Mercator

Table 45
Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI PMI
Sterigenics
Ontario, CA

Acute HI PMI: Receptor #95										
UTM East (m): 449282.55, UTM North (m): 3768755.8										
Chemical Name	CAS Number / Pollutant ID	Acute Hazard Quotients for Target Organs							Maximum Acute HI ¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/ Developmental	Respiratory System	Eye	Blood		
Benzene	71-43-2	-	-	9.7E-05	9.7E-05	-	-	9.7E-05	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	1.1E-04	-	1.1E-04	14.3%
Total PAHs [excluding naphthalen]	1151	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75070	-	-	-	-	3.6E-06	3.6E-06	-	3.6E-06	0.5%
Acrolein	107-02-8	-	-	-	-	3.5E-04	3.5E-04	-	3.5E-04	44.4%
Ammonia	7664-41-7	-	-	-	-	3.2E-04	3.2E-04	-	3.2E-04	40.4%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	2.3E-06	-	-	2.3E-06	2.3E-06	-	2.3E-06	0.3%
Xylene	1330-20-7	-	3.9E-07	-	-	3.9E-07	3.9E-07	-	3.9E-07	0.05%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	1.5E-07	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	3.6E-06	3.6E-06	-	3.6E-06	-	-	-	-	0%
Lead	7439-92-1	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	8.7E-06	-	-	-	-	-	0%
Copper	7440-50-8	-	-	-	-	1.8E-08	-	-	-	0%
HCl	7647-01-0	-	-	-	-	4.0E-08	4.0E-08	-	4.0E-08	0.01%
Manganese	7439-96-5	-	-	-	-	-	-	-	-	0%
Mercury	7439-97-6	-	1.5E-06	-	1.5E-06	-	-	-	-	0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	0%
Total		3.6E-06	7.8E-06	1.1E-04	1.0E-04	6.7E-04	7.8E-04	9.7E-05	7.8E-04	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

CAS = Chemical Abstract Service
 HI = Hazard Index
 m = meter

PAHs = Polycyclic aromatic hydrocarbons
 PMI = Point of Maximum Impact
 UTM = Universal Transverse Mercator

Table 46
Acute Health Quotients by Source at the 2021 Modeled Acute HI PMI
Sterigenics
Ontario, CA

Acute HI PMI: Receptor #95										
UTM East (m): 449282.55, UTM North (m): 3768755.8										
DEV_ID	Source	Acute Hazard Quotients for Target Organs							Maximum Acute HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/Developmental	Respiratory System	Eye	Blood		
ABATOR	Abator, R-G47352	-	6.4E-07	2.2E-05	2.2E-05	1.6E-04	1.8E-04	2.2E-05	1.8E-04	22.8%
CATOX	Catalytic Oxidizer, G52334	-	6.0E-07	2.1E-05	2.1E-05	1.5E-04	1.7E-04	2.1E-05	1.7E-04	21.5%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	2.4E-07	8.2E-06	8.2E-06	5.8E-05	6.6E-05	8.2E-06	6.6E-05	8.5%
BOILER2	Boiler #2	-	2.7E-07	9.3E-06	9.3E-06	6.6E-05	7.6E-05	9.3E-06	7.6E-05	9.7%
BOILER5	Boiler #5	-	3.4E-07	1.2E-05	1.2E-05	8.4E-05	9.6E-05	1.2E-05	9.6E-05	12.3%
BOILER6	Boiler #6	-	3.1E-07	1.1E-05	1.1E-05	7.6E-05	8.7E-05	1.1E-05	8.7E-05	11.1%
BOILER7	Boiler #7	-	3.2E-07	1.1E-05	1.1E-05	7.8E-05	8.9E-05	1.1E-05	8.9E-05	11.4%
ICE	ICE Emergency Generator	3.6E-06	5.1E-06	1.2E-05	8.3E-06	7.0E-06	2.1E-05	3.1E-06	2.1E-05	2.7%
Total		3.6E-06	7.8E-06	1.1E-04	1.0E-04	6.7E-04	7.8E-04	9.7E-05	7.8E-04	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

- HI = Hazard Index
- m = meter
- PMI = Point of Maximum Impact
- UTM = Universal Transverse Mercator

Table 47
Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI MEIR
Sterigenics
Ontario, CA

Acute HI MEIR: Receptor #1748										
UTM East (m): 448390, UTM North (m): 3771024										
Chemical Name	CAS Number / Pollutant ID	Acute Hazard Quotients for Target Organs							Maximum Acute HI ¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/ Developmental	Respiratory System	Eye	Blood		
Benzene	71-43-2	-	-	1.3E-06	1.3E-06	-	-	1.3E-06	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	1.5E-06	-	1.5E-06	13.7%
Total PAHs [excluding naphthalen	1151	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75070	-	-	-	-	4.6E-08	4.6E-08	-	4.6E-08	0.4%
Acrolein	107-02-8	-	-	-	-	4.8E-06	4.8E-06	-	4.8E-06	44.6%
Ammonia	7664-41-7	-	-	-	-	4.4E-06	4.4E-06	-	4.4E-06	40.9%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	3.2E-08	-	-	3.2E-08	3.2E-08	-	3.2E-08	0.3%
Xylene	1330-20-7	-	5.4E-09	-	-	5.4E-09	5.4E-09	-	5.4E-09	0.1%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	1.2E-09	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	2.8E-08	2.8E-08	-	2.8E-08	-	-	-	-	0%
Lead	7439-92-1	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	6.9E-08	-	-	-	-	-	0%
Copper	7440-50-8	-	-	-	-	1.4E-10	-	-	-	0%
HCl	7647-01-0	-	-	-	-	3.1E-10	3.1E-10	-	3.1E-10	0.003%
Manganese	7439-96-5	-	-	-	-	-	-	-	-	0%
Mercury	7439-97-6	-	1.2E-08	-	1.2E-08	-	-	-	-	0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	0%
Total		2.8E-08	7.8E-08	1.4E-06	1.4E-06	9.2E-06	1.1E-05	1.3E-06	1.1E-05	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

CAS = Chemical Abstract Service
 HI = Hazard Index
 m = meter

MEIR = Maximally Exposed Individual Resident
 PAHs = Polycyclic aromatic hydrocarbons
 UTM = Universal Transverse Mercator

Table 48
Acute Health Quotients by Source at the 2021 Modeled Acute HI MEIR
Sterigenics
Ontario, CA

Acute HI MEIR: Receptor #1748										
UTM East (m): 448390, UTM North (m): 3771024										
DEV_ID	Source	Acute Hazard Quotients for Target Organs							Maximum Acute HI ¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/Developmental	Respiratory System	Eye	Blood		
ABATOR	Abator, R-G47352	-	9.8E-09	3.4E-07	3.4E-07	2.4E-06	2.8E-06	3.4E-07	2.8E-06	25.8%
CATOX	Catalytic Oxidizer, G52334	-	8.8E-09	3.1E-07	3.1E-07	2.2E-06	2.5E-06	3.1E-07	2.5E-06	23.2%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	3.6E-09	1.3E-07	1.3E-07	8.9E-07	1.0E-06	1.3E-07	1.0E-06	9.5%
BOILER2	Boiler #2	-	3.8E-09	1.3E-07	1.3E-07	9.3E-07	1.1E-06	1.3E-07	1.1E-06	10.0%
BOILER5	Boiler #5	-	3.9E-09	1.4E-07	1.4E-07	9.6E-07	1.1E-06	1.4E-07	1.1E-06	10.3%
BOILER6	Boiler #6	-	3.7E-09	1.3E-07	1.3E-07	9.2E-07	1.1E-06	1.3E-07	1.1E-06	9.8%
BOILER7	Boiler #7	-	3.8E-09	1.3E-07	1.3E-07	9.3E-07	1.1E-06	1.3E-07	1.1E-06	10.0%
ICE	ICE Emergency Generator	2.8E-08	4.0E-08	9.3E-08	6.5E-08	5.5E-08	1.7E-07	2.4E-08	1.7E-07	1.5%
Total		2.8E-08	7.8E-08	1.4E-06	1.4E-06	9.2E-06	1.1E-05	1.3E-06	1.1E-05	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

- HI = Hazard Index
- m = meter
- MEIR = Maximally Exposed Individual Resident
- UTM = Universal Transverse Mercator

Table 49
Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI MEIW
Sterigenics
Ontario, CA

Acute HI MEIW: Receptor #95										
UTM East (m): 449282.55, UTM North (m): 3768755.8										
Chemical Name	CAS Number / Pollutant ID	Acute Hazard Quotients for Target Organs							Maximum Acute HI ¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/ Developmental	Respiratory System	Eye	Blood		
Benzene	71-43-2	-	-	9.7E-05	9.7E-05	-	-	9.7E-05	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	1.1E-04	-	1.1E-04	14.3%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75070	-	-	-	-	3.6E-06	3.6E-06	-	3.6E-06	0.5%
Acrolein	107-02-8	-	-	-	-	3.5E-04	3.5E-04	-	3.5E-04	44.4%
Ammonia	7664-41-7	-	-	-	-	3.2E-04	3.2E-04	-	3.2E-04	40.4%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	2.3E-06	-	-	2.3E-06	2.3E-06	-	2.3E-06	0.3%
Xylene	1330-20-7	-	3.9E-07	-	-	3.9E-07	3.9E-07	-	3.9E-07	0%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	1.5E-07	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	3.6E-06	3.6E-06	-	3.6E-06	-	-	-	-	0%
Lead	7439-92-1	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	8.7E-06	-	-	-	-	-	0%
Copper	7440-50-8	-	-	-	-	1.8E-08	-	-	-	0%
HCl	7647-01-0	-	-	-	-	4.0E-08	4.0E-08	-	4.0E-08	0.005%
Manganese	7439-96-5	-	-	-	-	-	-	-	-	0%
Mercury	7439-97-6	-	1.5E-06	-	1.5E-06	-	-	-	-	0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	0%
Total		3.6E-06	7.8E-06	1.1E-04	1.0E-04	6.7E-04	7.8E-04	9.7E-05	7.8E-04	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

CAS = Chemical Abstract Service
 HI = Hazard Index
 m = meter
 MEIW = Maximally Exposed Individual Worker

PAHs = Polycyclic aromatic hydrocarbons
 UTM = Universal Transverse Mercator

Table 50
Acute Health Quotients by Source at the 2021 Modeled Acute HI MEIW
Sterigenics
Ontario, CA

Acute HI MEIW: Receptor #95										
UTM East (m): 449282.55, UTM North (m): 3768755.8										
DEV_ID	Source	Acute Hazard Quotients for Target Organs							Maximum Acute HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/ Developmental	Respiratory System	Eye	Blood		
ABATOR	Abator, R-G47352	-	6.4E-07	2.2E-05	2.2E-05	1.6E-04	1.8E-04	2.2E-05	1.8E-04	22.8%
CATOX	Catalytic Oxidizer, G52334	-	6.0E-07	2.1E-05	2.1E-05	1.5E-04	1.7E-04	2.1E-05	1.7E-04	21.5%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	2.4E-07	8.2E-06	8.2E-06	5.8E-05	6.6E-05	8.2E-06	6.6E-05	8.5%
BOILER2	Boiler #2	-	2.7E-07	9.3E-06	9.3E-06	6.6E-05	7.6E-05	9.3E-06	7.6E-05	9.7%
BOILERS5	Boiler #5	-	3.4E-07	1.2E-05	1.2E-05	8.4E-05	9.6E-05	1.2E-05	9.6E-05	12.3%
BOILER6	Boiler #6	-	3.1E-07	1.1E-05	1.1E-05	7.6E-05	8.7E-05	1.1E-05	8.7E-05	11.1%
BOILER7	Boiler #7	-	3.2E-07	1.1E-05	1.1E-05	7.8E-05	8.9E-05	1.1E-05	8.9E-05	11.4%
ICE	ICE Emergency Generator	3.6E-06	5.1E-06	1.2E-05	8.3E-06	7.0E-06	2.1E-05	3.1E-06	2.1E-05	2.7%
Total		3.6E-06	7.8E-06	1.1E-04	1.0E-04	6.7E-04	7.8E-04	9.7E-05	7.8E-04	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

HI = Hazard Index

m = meter

MEIW = Maximally Exposed Individual Worker

UTM = Universal Transverse Mercator

Table 51
Acute Health Quotients by Substance and Target Organ at the 2021 Modeled Acute HI MEISR
Sterigenics
Ontario, CA

Acute HI MEISR: Sensitive Receptor #12										
UTM East (m): 449338, UTM North (m): 3769813										
Chemical Name	CAS Number / Pollutant ID	Acute Hazard Quotients for Target Organs							Maximum Acute HI ¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/ Developmental	Respiratory System	Eye	Blood		
Benzene	71-43-2	-	-	2.9E-06	2.9E-06	-	-	2.9E-06	-	0%
Formaldehyde	50-00-0	-	-	-	-	-	3.3E-06	-	3.3E-06	14.3%
Total PAHs [excluding naphthalene]	1151	-	-	-	-	-	-	-	-	0%
Naphthalene	91-20-3	-	-	-	-	-	-	-	-	0%
Acetaldehyde	75070	-	-	-	-	1.1E-07	1.1E-07	-	1.1E-07	0.5%
Acrolein	107-02-8	-	-	-	-	1.0E-05	1.0E-05	-	1.0E-05	44.4%
Ammonia	7664-41-7	-	-	-	-	9.3E-06	9.3E-06	-	9.3E-06	40.5%
Ethylbenzene	100-41-4	-	-	-	-	-	-	-	-	0%
Hexane	110-54-3	-	-	-	-	-	-	-	-	0%
Toluene	108-88-3	-	6.8E-08	-	-	6.8E-08	6.8E-08	-	6.8E-08	0.3%
Xylene	1330-20-7	-	1.2E-08	-	-	1.2E-08	1.2E-08	-	1.2E-08	0.1%
Ethylene oxide	75-21-8	-	-	-	-	-	-	-	-	0%
1,3-Butadiene	106-99-0	-	-	-	4.3E-09	-	-	-	-	0%
Cadmium	7440-43-9	-	-	-	-	-	-	-	-	0%
Cr(VI)	18540299	-	-	-	-	-	-	-	-	0%
Arsenic	7440-38-2	1.0E-07	1.0E-07	-	1.0E-07	-	-	-	-	0%
Lead	7439-92-1	-	-	-	-	-	-	-	-	0%
Nickel	7440-02-0	-	-	2.5E-07	-	-	-	-	-	0%
Copper	7440-50-8	-	-	-	-	5.3E-10	-	-	-	0%
HCl	7647-01-0	-	-	-	-	1.2E-09	1.2E-09	-	1.2E-09	0.005%
Manganese	7439-96-5	-	-	-	-	-	-	-	-	0%
Mercury	7439-97-6	-	4.4E-08	-	4.4E-08	-	-	-	-	0%
Selenium	7782-49-2	-	-	-	-	-	-	-	-	0%
DieselExhPM	9901	-	-	-	-	-	-	-	-	0%
Total		1.0E-07	2.3E-07	3.1E-06	3.0E-06	2.0E-05	2.3E-05	2.9E-06	2.3E-05	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

CAS = Chemical Abstract Service

HI = Hazard Index

m = meter

MEISR = Maximally Exposed Individual Sensitive Receptor

PAHs = Polycyclic aromatic hydrocarbons

UTM = Universal Transverse Mercator

Table 52
Acute Health Quotients by Source at the 2021 Modeled Acute HI MEISR
Sterigenics
Ontario, CA

Acute HI MEISR: Sensitive Receptor #12										
UTM East (m): 449338, UTM North (m): 3769813										
DEV_ID	Source	Acute Hazard Quotients for Target Organs							Maximum Acute HI¹	Contribution (%)
		Cardio-Vascular (CV)	Central Nervous System (CNS)	Immune System	Reproductive System/Developmental	Respiratory System	Eye	Blood		
ABATOR	Abator, R-G47352	-	1.6E-08	5.6E-07	5.6E-07	4.0E-06	4.5E-06	5.6E-07	4.5E-06	19.7%
CATOX	Catalytic Oxidizer, G52334	-	1.4E-08	4.9E-07	4.9E-07	3.5E-06	4.0E-06	4.9E-07	4.0E-06	17.3%
SCRUBBER	Scrubber, F98585	-	-	-	-	-	-	-	-	0.0%
FUGITIVE	Fugitive Emissions	-	-	-	-	-	-	-	-	0.0%
BOILER1	Boiler #1	-	9.5E-09	3.3E-07	3.3E-07	2.3E-06	2.7E-06	3.3E-07	2.7E-06	11.6%
BOILER2	Boiler #2	-	1.0E-08	3.5E-07	3.5E-07	2.5E-06	2.9E-06	3.5E-07	2.9E-06	12.5%
BOILER5	Boiler #5	-	1.1E-08	3.6E-07	3.6E-07	2.6E-06	3.0E-06	3.6E-07	3.0E-06	12.9%
BOILER6	Boiler #6	-	9.2E-09	3.2E-07	3.2E-07	2.3E-06	2.6E-06	3.2E-07	2.6E-06	11.2%
BOILER7	Boiler #7	-	1.0E-08	3.5E-07	3.5E-07	2.5E-06	2.8E-06	3.5E-07	2.8E-06	12.2%
ICE	ICE Emergency Generator	1.0E-07	1.5E-07	3.4E-07	2.4E-07	2.0E-07	6.1E-07	9.0E-08	6.1E-07	2.7%
Total		1.0E-07	2.3E-07	3.1E-06	3.0E-06	2.0E-05	2.3E-05	2.9E-06	2.3E-05	100%

Notes:

¹ Acute HI results presented are for the highest impact target organ, Eye.

Abbreviations:

HI = Hazard Index
m = meter
MEISR = Maximally Exposed Individual Sensitive Receptor
UTM = Universal Transverse Mercator

Table 53
Cancer Risks and Population Totals at Census Receptors
Sterigenics
Ontario, CA

Receptor ID	70-year Cancer Risk (chances in-one-million)	Population Totals	Cancer Risk x Population Totals¹	UTM East² (m)	UTM North² (m)
318	1.47	2.0E+00	2.9E-06	448,774	3,765,086
939	1.39	2.0E+00	2.8E-06	445,806	3,768,135
2148	1.57	8.3E+02	1.3E-03	447,836	3,770,659
2149	1.19	6.0E+02	7.1E-04	447,091	3,770,715
2186	1.17	8.4E+02	9.9E-04	446,641	3,770,423
2251	1.16	2.2E+03	2.6E-03	448,053	3,771,256
2325	3.10	6.4E+01	2.0E-04	453,883	3,770,574
2327	3.54	1.6E+01	5.7E-05	453,867	3,770,172
2330	2.72	3.0E+00	8.2E-06	454,696	3,770,380
2331	2.58	2.9E+01	7.5E-05	454,687	3,769,826
2333	2.94	8.8E+01	2.6E-04	454,330	3,769,837
2335	3.75	9.0E+00	3.4E-05	453,692	3,769,794
2353	3.01	1.8E+01	5.4E-05	453,843	3,769,366
2395	1.14	5.6E+01	6.4E-05	445,995	3,765,340
2415	1.18	3.0E+02	3.5E-04	446,563	3,764,943
2416	1.16	1.8E+02	2.1E-04	446,651	3,764,813
2424	1.19	7.8E+02	9.3E-04	446,143	3,765,366
2425	1.24	2.9E+01	3.6E-05	446,257	3,765,400
2426	1.30	3.5E+01	4.6E-05	446,615	3,765,255
2427	1.36	1.2E+02	1.6E-04	446,707	3,765,308
2428	1.20	5.9E+02	7.1E-04	446,399	3,765,141
2429	1.24	1.0E+02	1.2E-04	446,184	3,765,507
2430	1.33	1.4E+02	1.8E-04	446,463	3,765,445
2431	1.25	6.7E+01	8.4E-05	446,155	3,765,571
2480	1.53	2.9E+03	4.4E-03	451,246	3,771,349
2520	1.18	1.1E+02	1.3E-04	455,114	3,772,057
2522	1.24	4.1E+02	5.1E-04	455,544	3,772,017
2523	1.44	2.5E+02	3.5E-04	455,526	3,771,775
2527	1.15	1.2E+02	1.4E-04	455,931	3,772,159
2528	1.22	3.2E+02	3.9E-04	455,930	3,772,057
2529	1.29	1.2E+02	1.6E-04	455,927	3,771,957
2530	1.21	1.9E+02	2.3E-04	456,334	3,772,057
2531	1.34	4.5E+02	6.1E-04	456,331	3,771,830
2532	1.39	3.5E+02	4.8E-04	455,945	3,771,796
2533	1.47	6.0E+00	8.8E-06	455,815	3,771,695
2551	1.18	3.7E+02	4.3E-04	457,145	3,772,010
2552	1.27	2.8E+02	3.5E-04	457,139	3,771,786
2556	1.18	2.6E+02	3.0E-04	456,741	3,772,056
2557	1.13	9.7E+01	1.1E-04	456,742	3,772,157
2558	1.23	1.2E+02	1.4E-04	456,737	3,771,957
2559	1.30	4.5E+02	5.8E-04	456,748	3,771,794
2561	1.13	1.8E+02	2.0E-04	457,868	3,771,889
2563	1.18	7.2E+01	8.5E-05	457,892	3,771,720
2564	1.64	3.5E+02	5.8E-04	455,513	3,771,521
2565	1.76	1.6E+02	2.8E-04	455,521	3,771,351
2566	1.95	3.1E+01	6.1E-05	455,118	3,771,212
2568	1.94	4.4E+02	8.5E-04	455,536	3,771,106
2569	2.04	1.7E+02	3.5E-04	455,486	3,770,958
2570	1.52	3.5E+02	5.3E-04	456,327	3,771,502
2571	1.73	7.5E+02	1.3E-03	455,910	3,771,285
2572	1.89	6.5E+01	1.2E-04	455,935	3,770,884
2573	1.83	1.2E+02	2.2E-04	456,070	3,770,966
2574	1.70	5.1E+02	8.7E-04	456,292	3,771,118
2575	1.67	1.3E+02	2.2E-04	456,474	3,771,016
2576	1.27	3.4E+02	4.3E-04	456,998	3,769,816
2577	1.56	4.0E+01	6.2E-05	456,316	3,769,878
2580	1.75	1.3E+02	2.3E-04	455,913	3,769,874
2582	1.98	4.2E+01	8.3E-05	455,511	3,769,874
2584	2.26	4.9E+01	1.1E-04	455,102	3,769,874
2585	2.37	7.4E+01	1.8E-04	455,104	3,770,121
2586	2.40	1.7E+02	4.0E-04	455,105	3,770,522
2587	2.15	4.9E+02	1.0E-03	455,518	3,770,622
2588	2.15	2.1E+02	4.6E-04	455,516	3,770,345
2589	2.11	1.6E+02	3.4E-04	455,514	3,770,170

Table 53 Continued

2590	1.71	1.2E+02	2.1E-04	456,415	3,770,590
2591	1.79	2.2E+02	4.0E-04	456,214	3,770,491
2592	1.88	1.6E+02	3.0E-04	456,044	3,770,672
2593	1.94	1.4E+02	2.7E-04	455,917	3,770,669
2594	2.01	1.6E+01	3.2E-05	455,772	3,770,709
2595	1.99	2.4E+01	4.8E-05	455,822	3,770,622
2596	1.93	2.1E+02	4.0E-04	455,917	3,770,444
2597	1.88	1.3E+02	2.5E-04	455,917	3,770,220
2598	1.63	3.3E+01	5.4E-05	456,388	3,770,178
2599	1.38	2.8E+02	3.9E-04	457,229	3,771,396
2600	1.45	3.2E+02	4.7E-04	457,029	3,771,298
2601	1.42	1.8E+02	2.6E-04	456,875	3,771,496
2602	1.48	2.6E+02	3.8E-04	456,718	3,771,400
2603	1.47	1.5E+02	2.2E-04	456,590	3,771,497
2604	1.48	1.1E+02	1.6E-04	456,661	3,771,435
2605	1.53	1.9E+02	2.9E-04	456,855	3,771,101
2606	1.61	5.2E+02	8.3E-04	456,651	3,771,026
2607	1.43	2.7E+02	3.8E-04	457,202	3,770,979
2608	1.40	1.6E+02	2.2E-04	457,247	3,770,684
2609	1.47	1.5E+02	2.2E-04	457,054	3,770,721
2610	1.55	3.5E+02	5.3E-04	456,780	3,770,547
2611	1.62	2.0E+02	3.2E-04	456,661	3,770,715
2612	1.35	1.4E+02	1.9E-04	457,290	3,770,445
2613	1.34	1.2E+02	1.6E-04	457,124	3,770,166
2614	1.41	3.2E+02	4.6E-04	457,087	3,770,389
2615	1.45	1.2E+02	1.7E-04	457,049	3,770,543
2616	1.53	2.1E+02	3.1E-04	456,725	3,770,344
2617	1.49	8.4E+01	1.2E-04	456,723	3,770,169
2618	1.20	5.1E+02	6.1E-04	457,959	3,771,465
2619	1.23	8.3E+01	1.0E-04	457,762	3,771,568
2620	1.22	7.1E+01	8.7E-05	457,819	3,771,544
2621	1.32	3.7E+02	4.9E-04	457,553	3,771,341
2622	1.30	2.0E+02	2.6E-04	457,474	3,771,519
2623	1.31	1.7E+02	2.2E-04	457,607	3,771,205
2624	1.32	2.2E+02	2.8E-04	457,572	3,771,072
2625	1.22	4.6E+02	5.7E-04	457,939	3,771,087
2626	1.22	5.9E+01	7.2E-05	457,939	3,770,922
2627	1.30	1.2E+02	1.6E-04	457,645	3,770,925
2628	1.36	1.4E+02	1.9E-04	457,444	3,770,927
2629	1.19	3.0E+02	3.5E-04	457,927	3,770,608
2630	1.14	1.2E+02	1.4E-04	457,931	3,770,343
2631	1.26	4.4E+02	5.5E-04	457,520	3,770,352
2632	1.27	1.5E+02	1.9E-04	457,614	3,770,549
2633	1.35	1.8E+02	2.4E-04	457,410	3,770,668
2634	1.24	1.9E+02	2.4E-04	457,694	3,770,523
2642	1.19	6.7E+01	8.0E-05	456,677	3,769,399
2643	1.40	6.8E+01	9.5E-05	456,120	3,769,415
2644	1.27	3.7E+01	4.7E-05	456,311	3,769,322
2647	1.82	1.7E+02	3.0E-04	455,248	3,769,407
2648	1.60	2.7E+01	4.3E-05	455,487	3,769,305
2649	1.61	6.0E+00	9.6E-06	455,096	3,769,085
2650	1.23	5.9E+01	7.2E-05	455,488	3,768,832
2651	1.26	2.0E+01	2.5E-05	455,090	3,768,685
2652	1.57	2.6E+01	4.1E-05	454,683	3,768,836
2653	1.80	6.7E+01	1.2E-04	454,280	3,768,835
2654	2.09	1.2E+02	2.5E-04	453,878	3,768,834
2655	2.48	2.7E+01	6.7E-05	453,458	3,768,835
2656	1.61	3.4E+01	5.5E-05	453,445	3,768,114
2658	1.48	6.4E+01	9.5E-05	453,877	3,768,272
2659	1.30	3.5E+01	4.5E-05	454,283	3,768,258
2679	1.26	5.6E+01	7.1E-05	453,863	3,767,835
2680	1.43	3.6E+01	5.1E-05	453,773	3,768,097
2681	1.39	2.9E+01	4.0E-05	453,439	3,767,703
2688	1.18	3.9E+02	4.6E-04	453,759	3,767,491
2689	1.34	4.3E+01	5.8E-05	453,338	3,767,487
2690	1.22	2.4E+02	2.9E-04	453,351	3,767,166
2698	1.14	3.5E+01	4.0E-05	453,373	3,766,967
2699	1.27	1.6E+01	2.0E-05	453,442	3,767,391
2866	3.13	7.0E+00	2.2E-05	447,663	3,769,551
2878	7.63	2.0E+00	1.5E-05	448,861	3,769,592
2969	1.41	3.3E+02	4.6E-04	447,012	3,765,219

Table 53 Continued

2970	1.33	8.0E+01	1.1E-04	447,013	3,765,042
2971	1.45	3.6E+01	5.2E-05	447,176	3,765,208
2973	1.53	1.0E+00	1.5E-06	446,400	3,769,438
2982	1.21	2.4E+02	2.8E-04	447,193	3,764,685
2984	1.17	5.2E+01	6.1E-05	447,213	3,764,603
2985	1.20	6.8E+01	8.2E-05	447,033	3,764,723
2986	1.18	4.4E+01	5.2E-05	447,490	3,764,557
2987	1.15	5.9E+01	6.8E-05	447,477	3,764,486
2988	1.18	2.0E+00	2.4E-06	447,015	3,764,687
2989	1.15	1.3E+02	1.5E-04	447,219	3,764,548
2991	1.18	1.6E+01	1.9E-05	446,956	3,764,715
2992	1.23	3.3E+01	4.1E-05	447,054	3,764,784
2994	1.40	9.3E+01	1.3E-04	447,195	3,765,097
2995	1.44	8.0E+01	1.1E-04	447,236	3,765,153
2997	1.16	9.0E+00	1.0E-05	447,197	3,764,578
2999	1.31	8.3E+02	1.1E-03	448,014	3,764,800
3000	1.17	6.6E+01	7.7E-05	447,873	3,764,517
3001	1.20	5.6E+01	6.7E-05	447,914	3,764,591
3002	1.34	1.4E+02	1.9E-04	447,843	3,764,861
3003	1.28	1.5E+02	1.9E-04	447,850	3,764,743
3004	1.24	3.6E+01	4.4E-05	447,636	3,764,675
3005	1.21	6.9E+01	8.4E-05	447,760	3,764,615
3006	1.40	8.2E+01	1.1E-04	447,785	3,764,960
3007	1.45	5.4E+01	7.9E-05	447,460	3,765,108
3008	1.35	5.0E+02	6.7E-04	447,364	3,764,941
3009	1.28	7.2E+01	9.2E-05	447,413	3,764,799
3010	1.24	1.2E+02	1.5E-04	447,366	3,764,722
3011	1.28	4.6E+01	5.9E-05	447,478	3,764,790


Notes:

- ¹ Calculation is conducted only for the receptors which fall within the 30-year residential cancer zone of impact.
- ² Coordinates shown are in a projected coordinate system of UTM zone 11N, with a datum based on WGS 1984.

Abbreviations:


- m = meter
- UTM = Universal Transverse Mercator

FIGURES

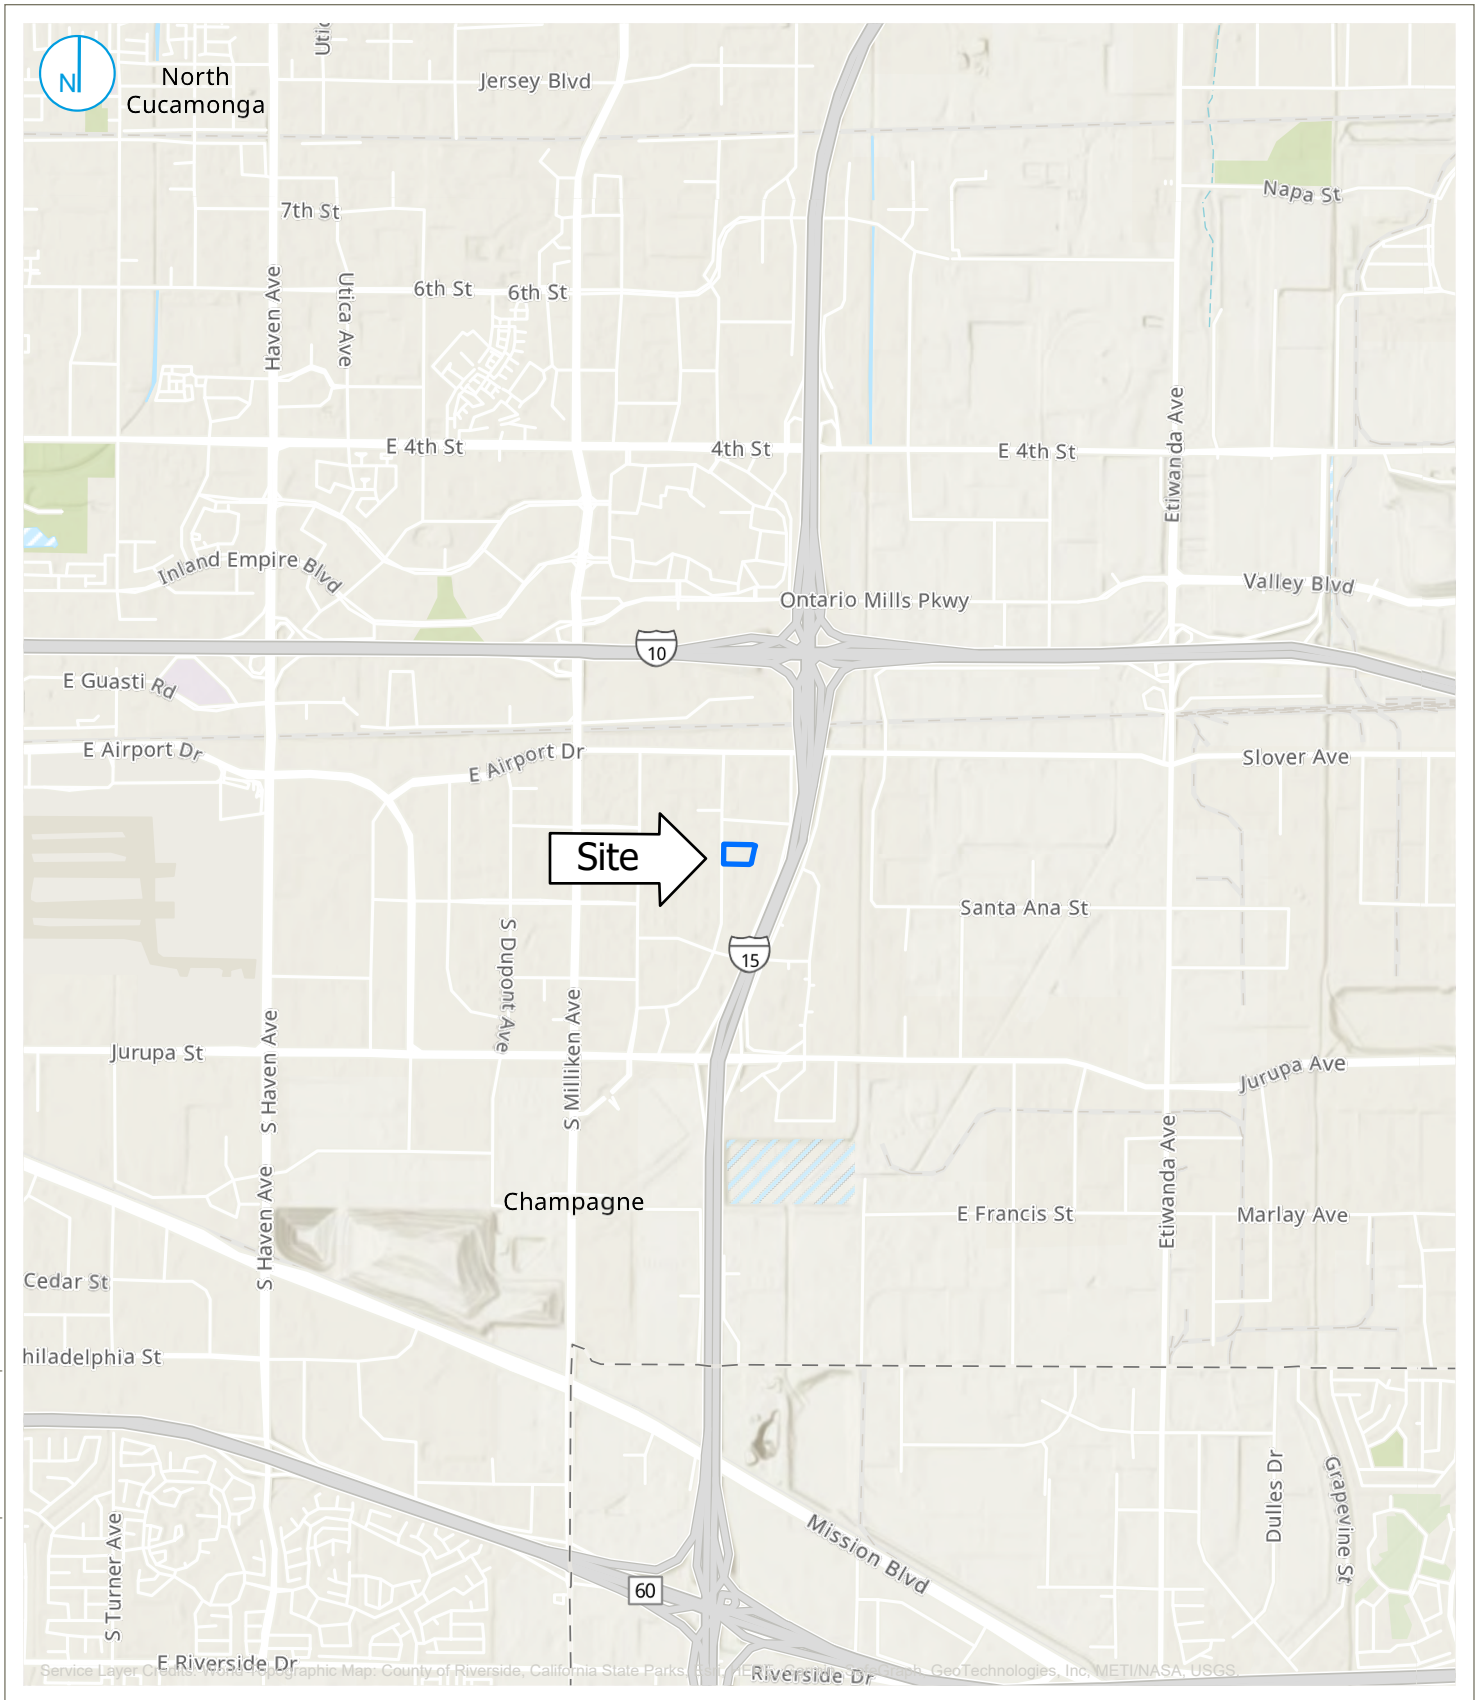

PROJECT: 169000XXXX | DATED: 3/12/2023 | DESIGNER: RPEPEL

Service Layer Credits: World Topographic Map: County of Riverside, California State Parks, Esri, HERE, DeLorme, Swatch Topo, GeoTechnologies, Inc, METI/NASA, USGS



Key Map (not to scale)


 Site Boundary

SITE LOCATION

FIGURE 01




Sterigenics US, LLC
 687 S Wanamaker Ave
 Ontario, CA

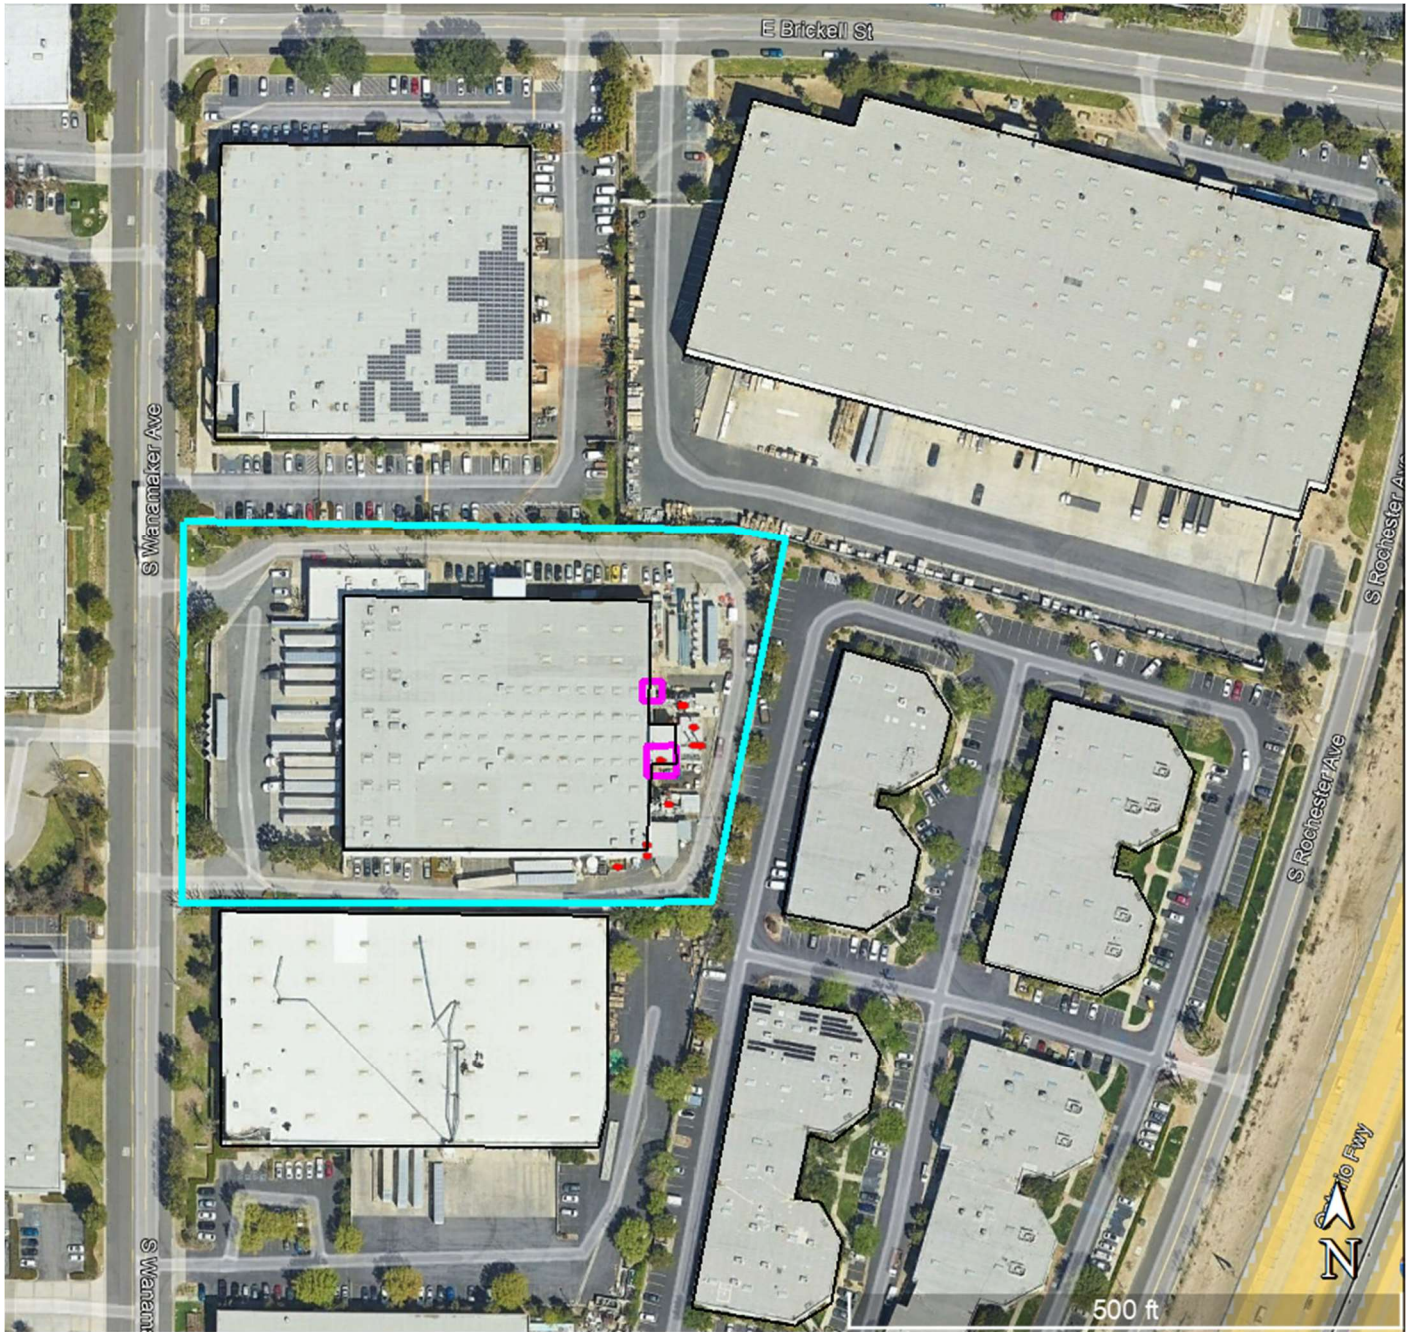

- ▬ Facility Boundary
- Buildings
- ▬ Fugitive Sources
- Point Sources

Figure 02:
Site Plot Plan with Sources and Buildings

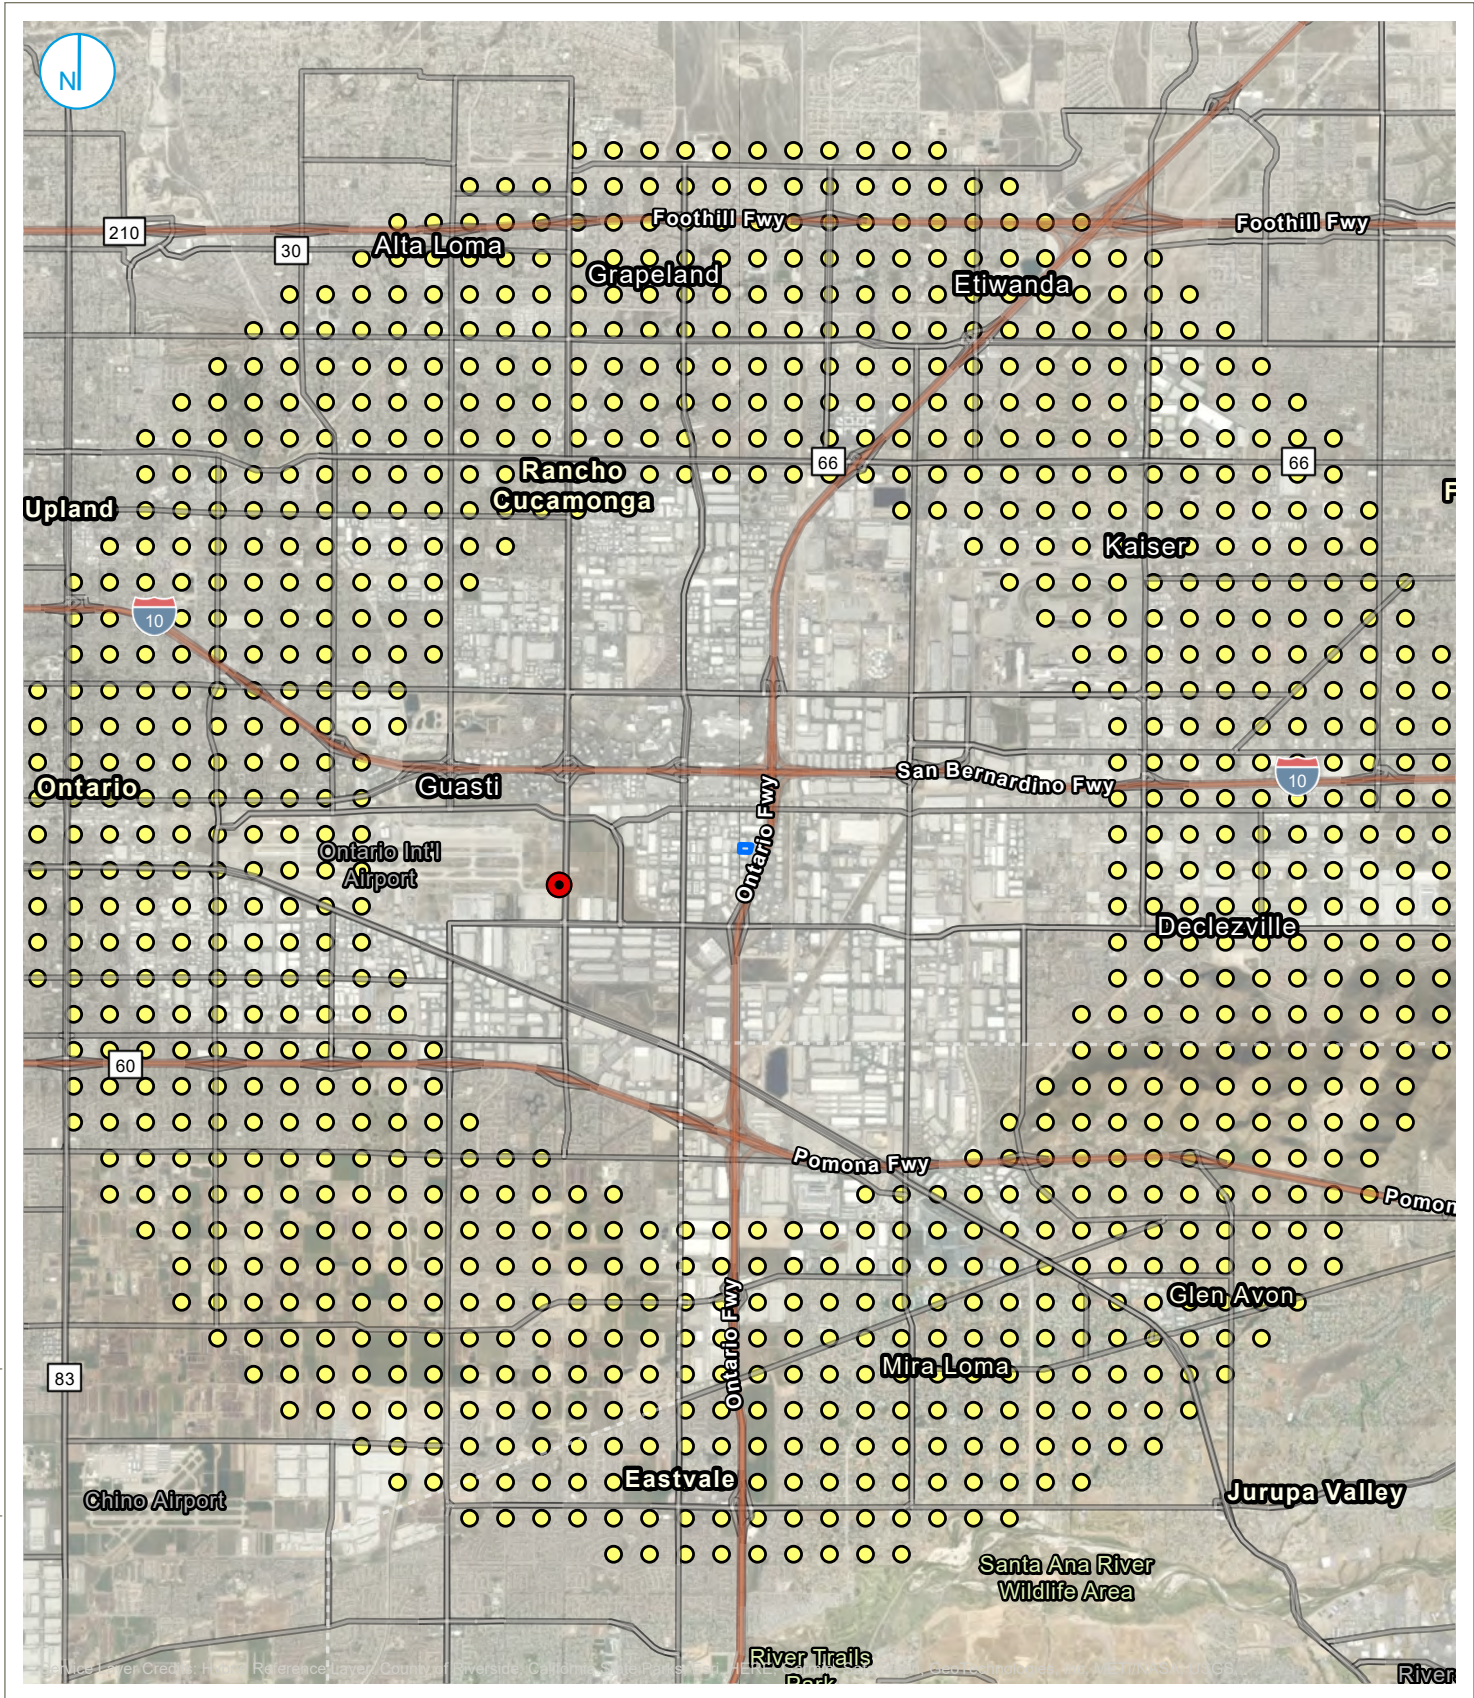

PROJECT: 169000XXXX | DATED: 3/23/2023 | DESIGNER: RPEPEL


- Spacing**
- 500 Meter Spacing
 - Site Boundary
 - Meteorological Station

RECEPTORS (500 METER SPACING) AND METEOROLOGICAL STATION

FIGURE 03a



Sterigenics US, LLC
687 S Wanamaker Ave
Ontario, CA

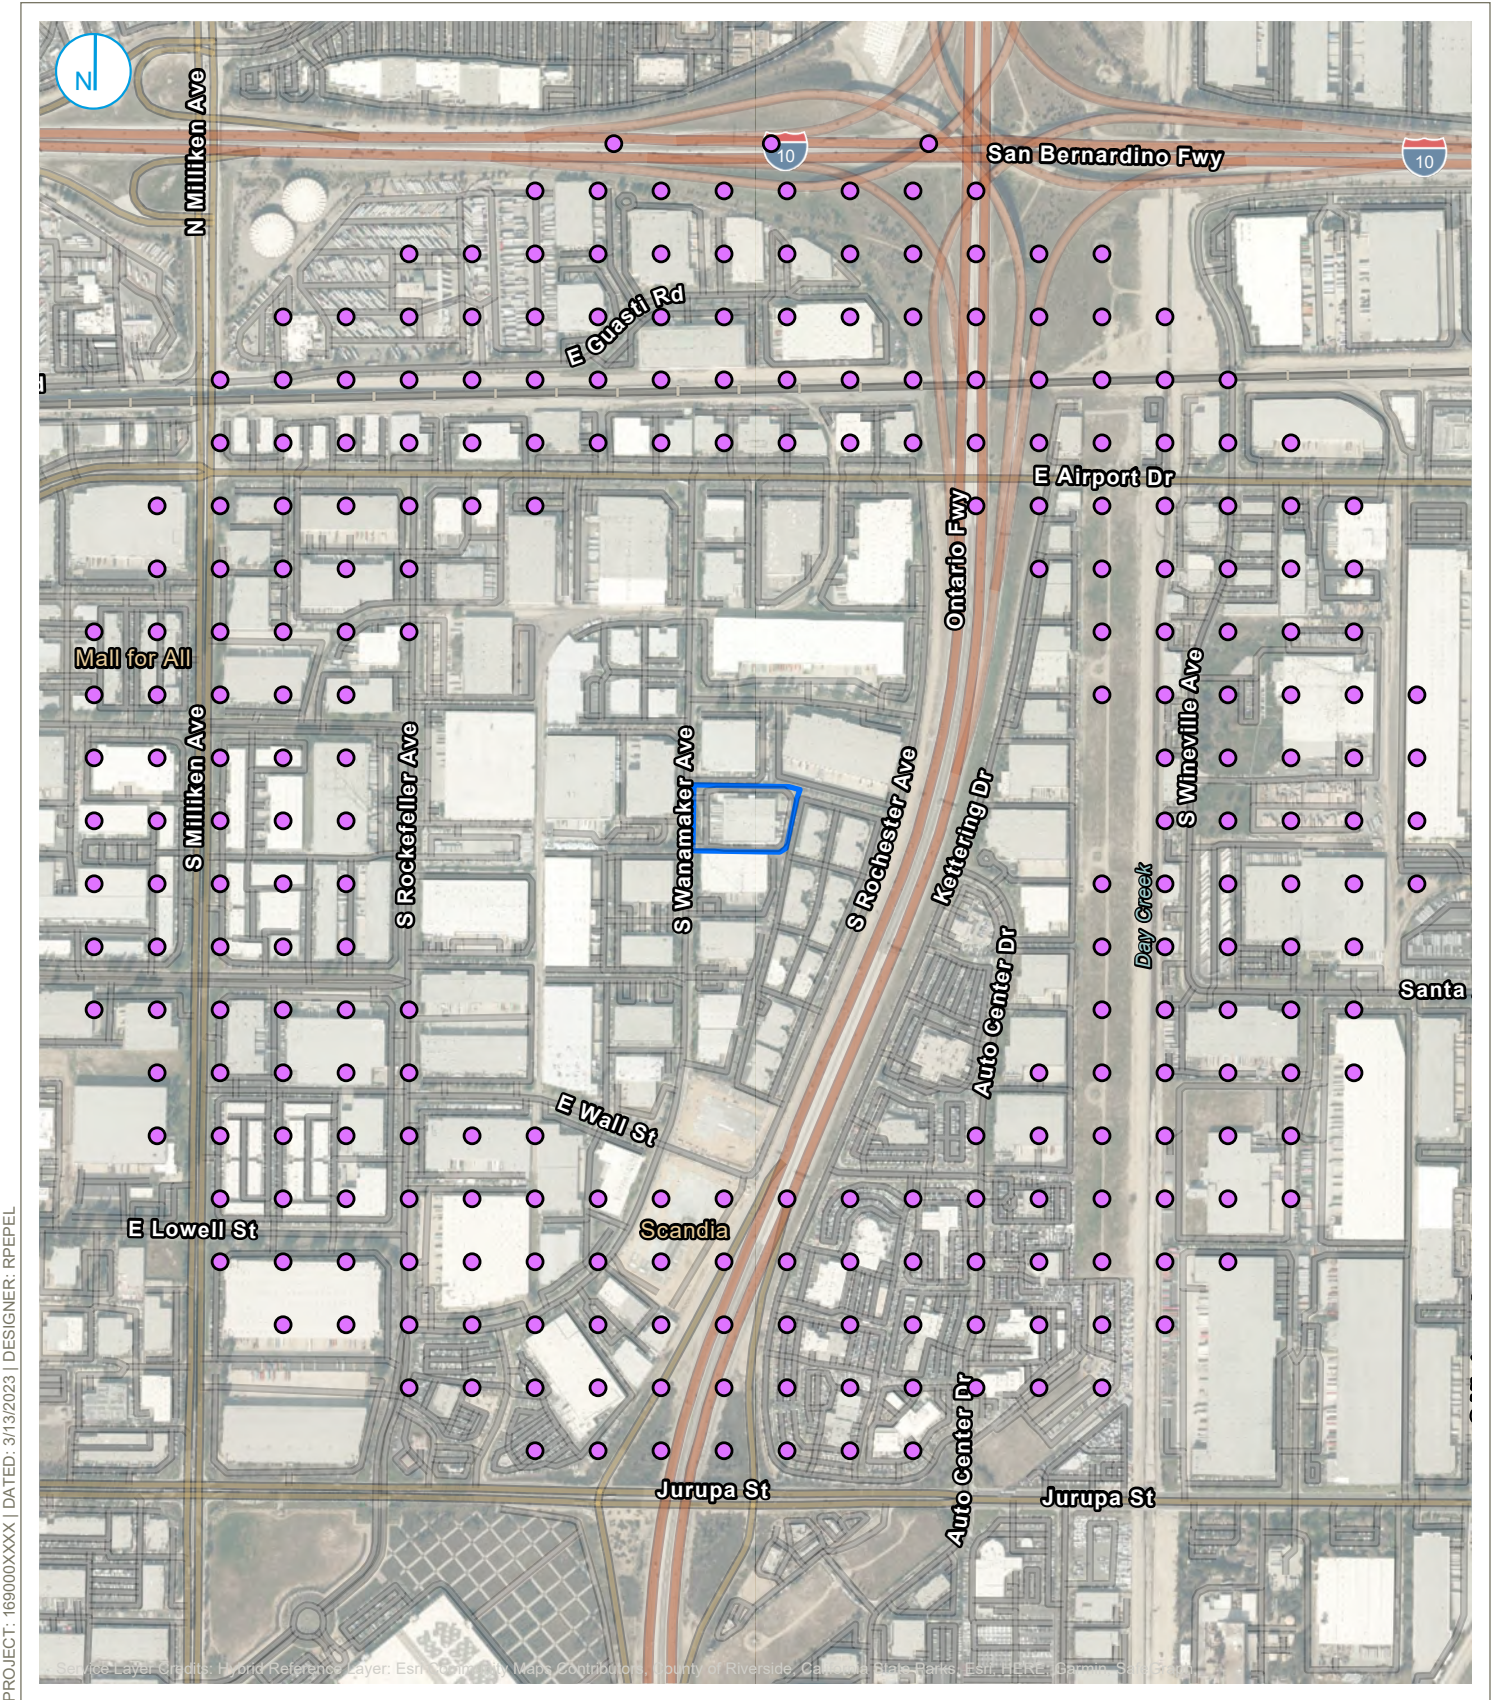

Spacing


- 100 Meter Spacing
- Site Boundary

RECEPTORS (100 METER SPACING)

FIGURE 03c



Sterigenics US, LLC
 687 S Wanamaker Ave
 Ontario, CA

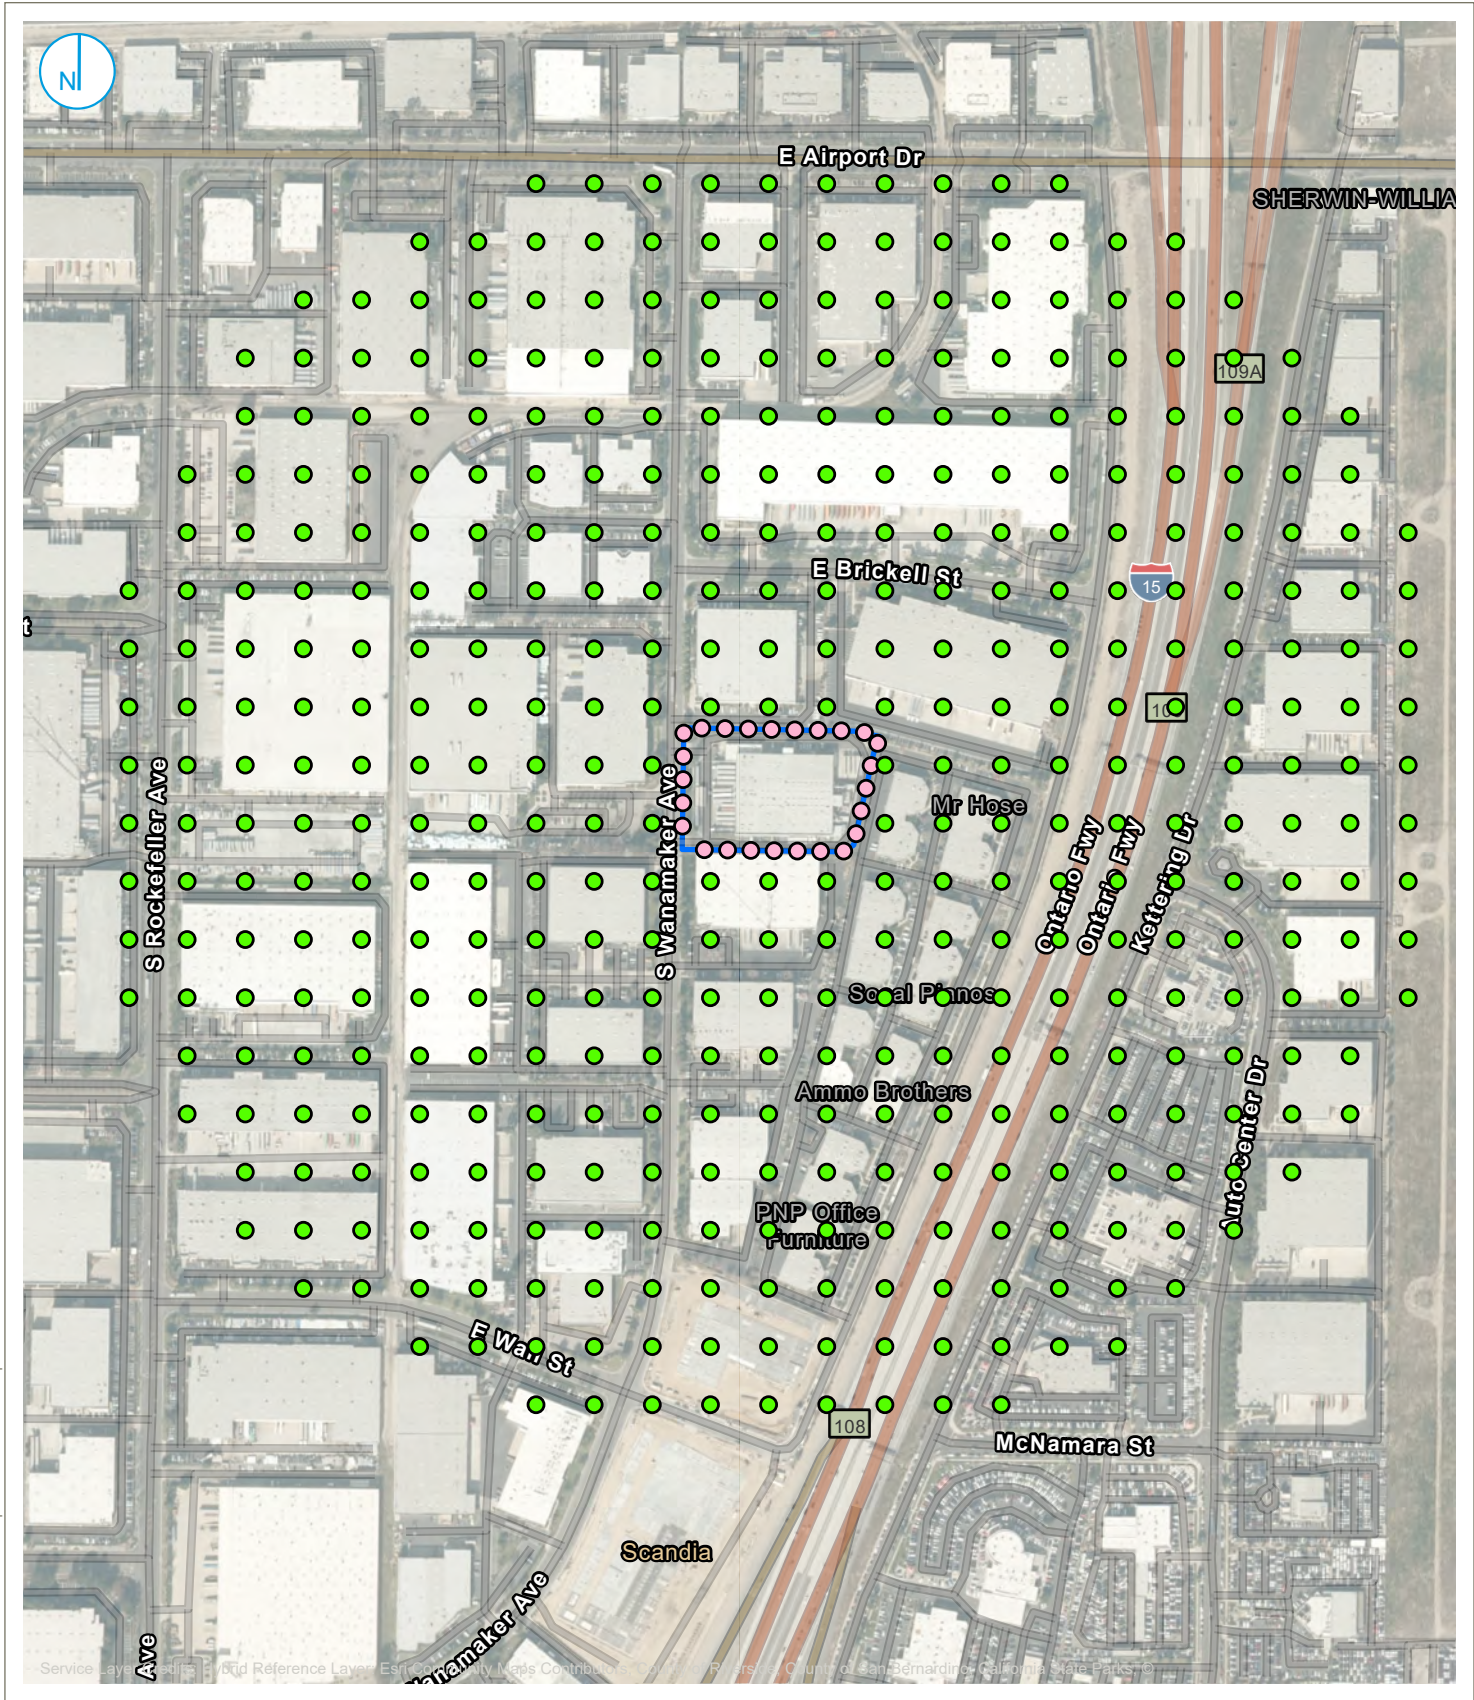

PROJECT: 169000XXXX | DATED: 3/13/2023 | DESIGNER: RPEPEL

Spacing


- 50 Meter Spacing
- 20 Meter Spacing Fenceline Receptors
- Site Boundary

RECEPTORS (50 METER SPACING AND 20 METER SPACING FENCELINE)

FIGURE 03d



Sterigenics US, LLC
 687 S Wanamaker Ave
 Ontario, CA

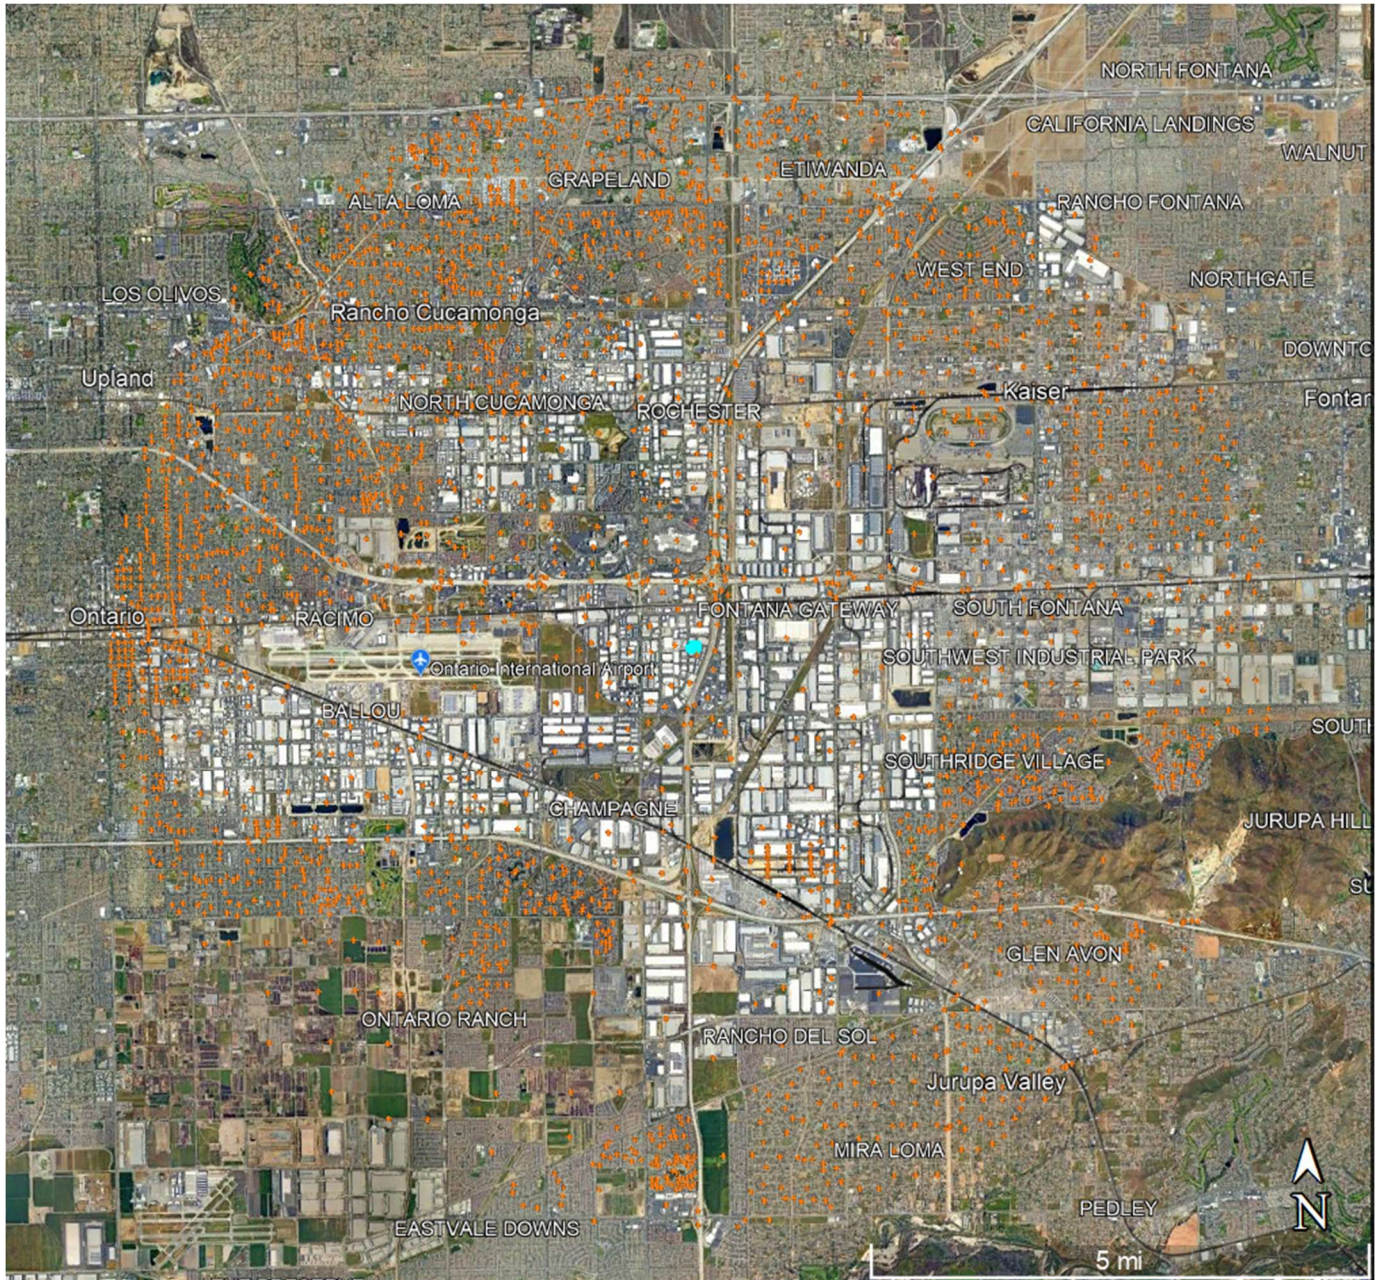

- Facility Boundary
- Census Block Centroid Receptors

Figure 03e:


Census Block Centroid Receptors

WIND ROSE PLOT:

**Figure 04: 5-Year Wind Rose for Ontario Int'l Airport
Meteorological Station (2012-2016)**

DISPLAY:

**Wind Speed
Direction (blowing from)**

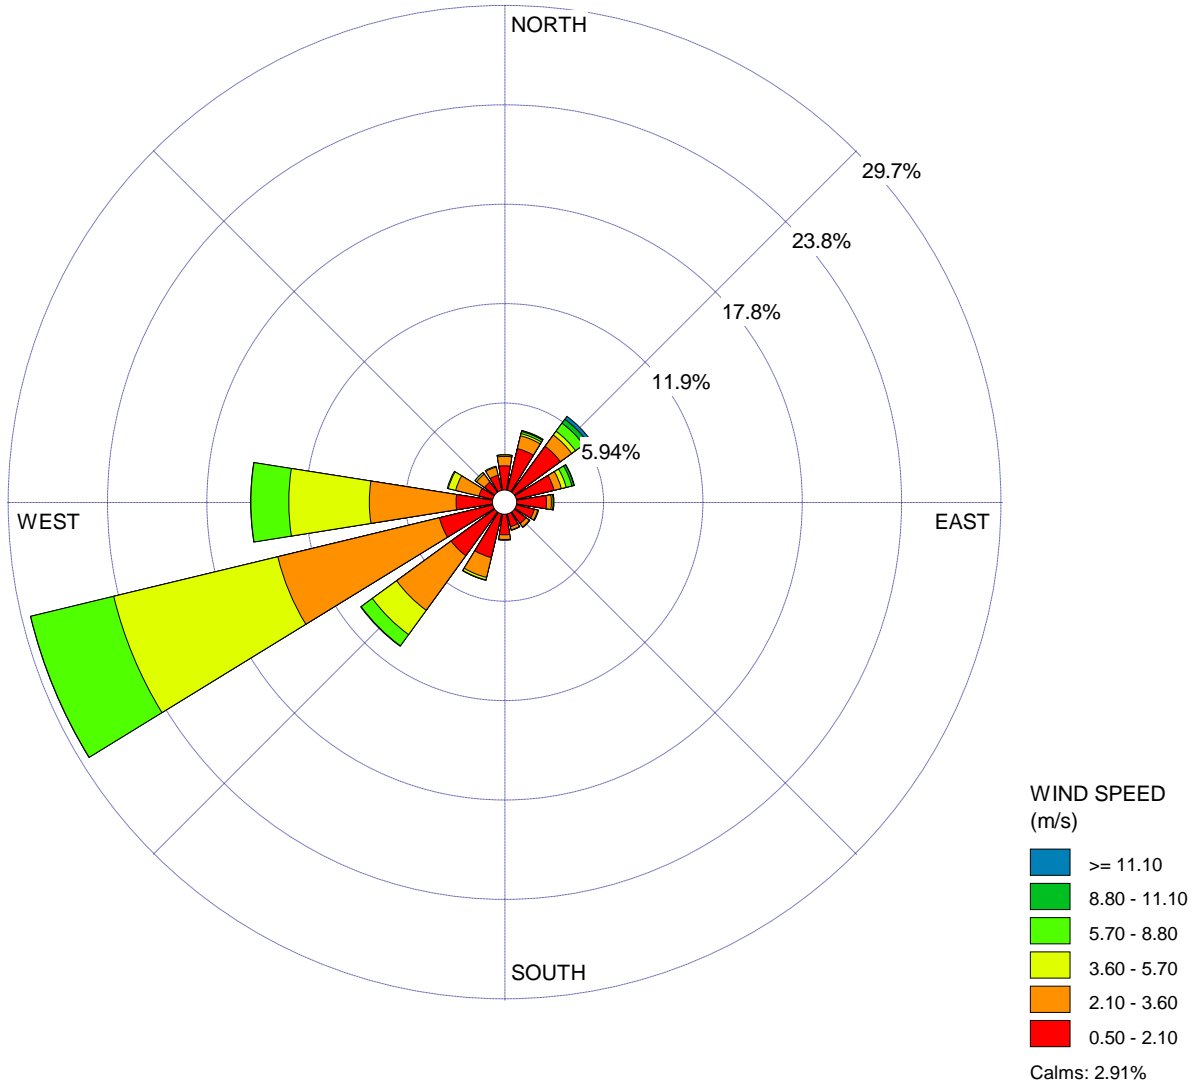

COMMENTS:

DATA PERIOD:

**Start Date: 1/1/2012 - 00:00
End Date: 12/31/2016 - 23:59**

COMPANY NAME:

South Coast Air Quality Management District

MODELER:

Melissa Sheffer



CALM WINDS:

2.91%

TOTAL COUNT:

43599 hrs.


AVG. WIND SPEED:

2.88 m/s

DATE:

5/23/2017

PROJECT NO.:

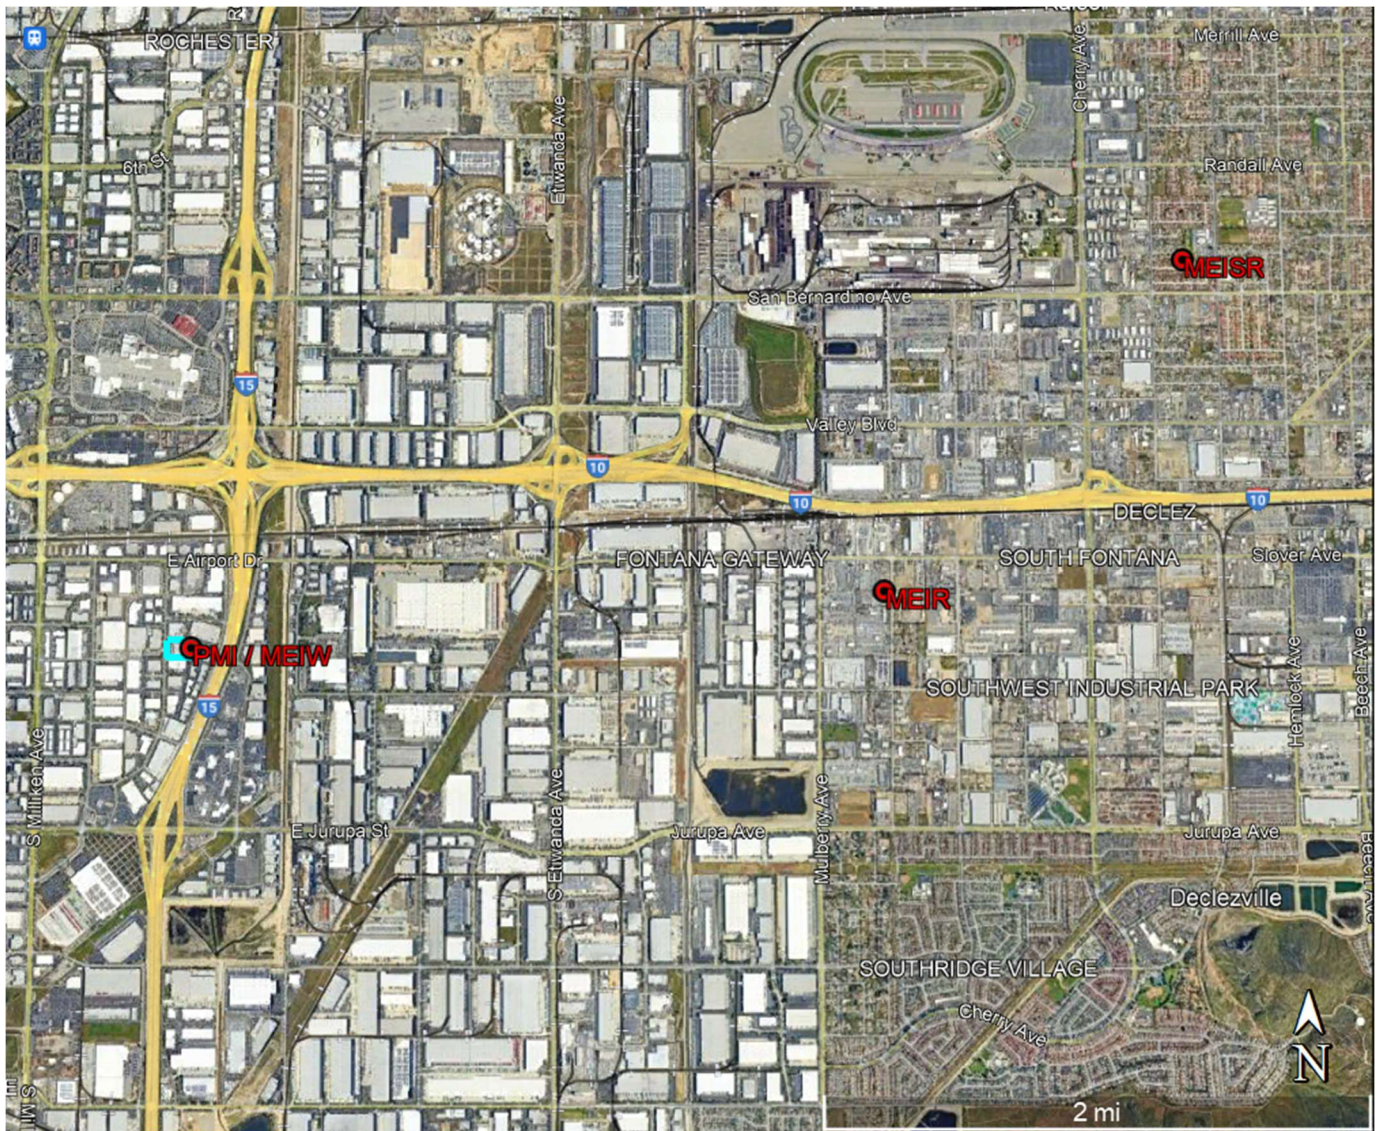


 Facility Boundary

Figure 05:
Locations of PMI, MEIR, MEIW and MEISR
for Cancer Risk

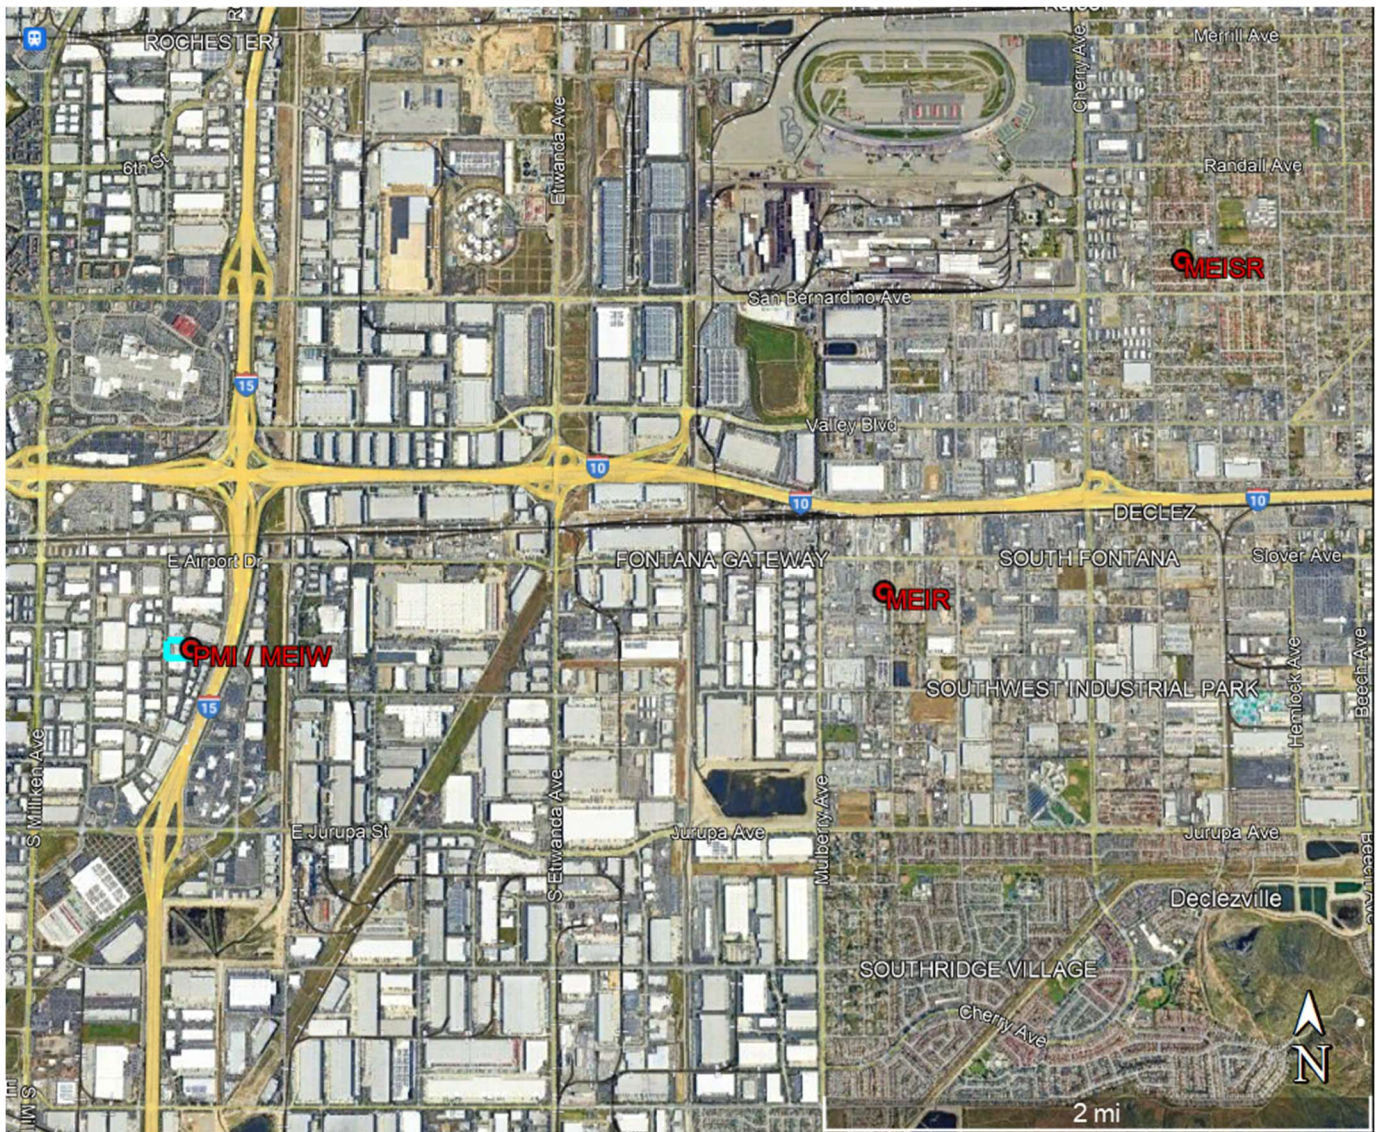


Figure 06:

**Locations of PMI, MEIR, MEIW and MEISR
for Chronic Hazard Index**


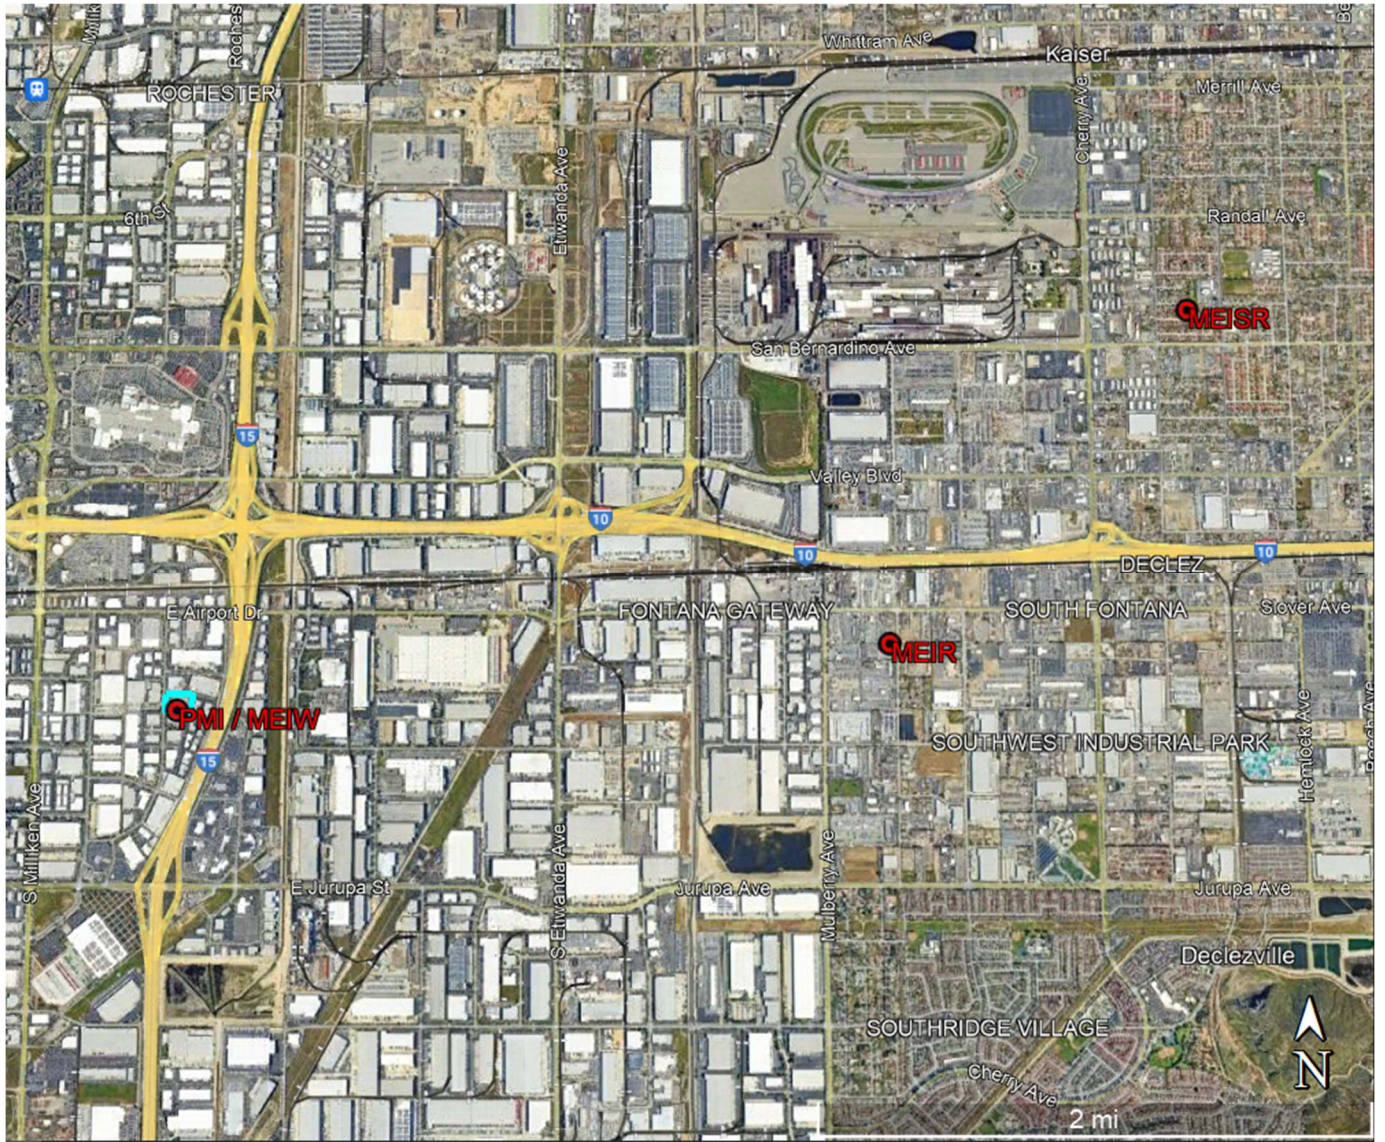


Figure 07:

**Locations of PMI, MEIR, MEIW and MEISR
for 8-HR Chronic Hazard Index**

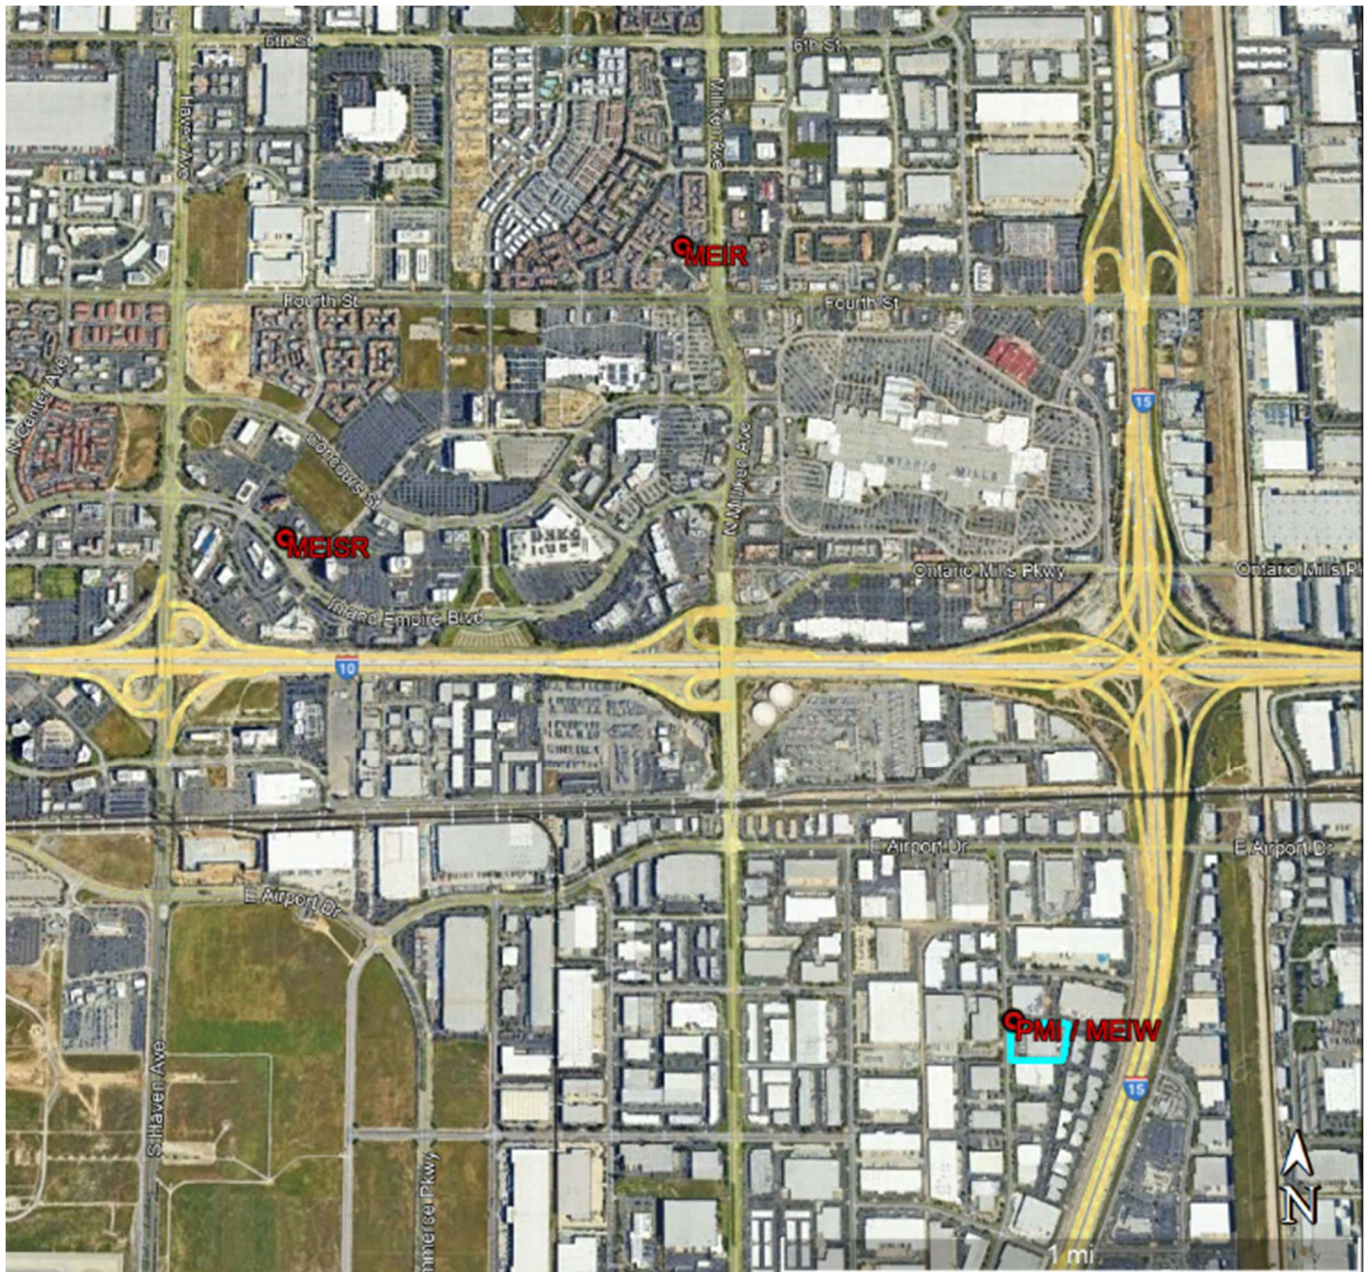


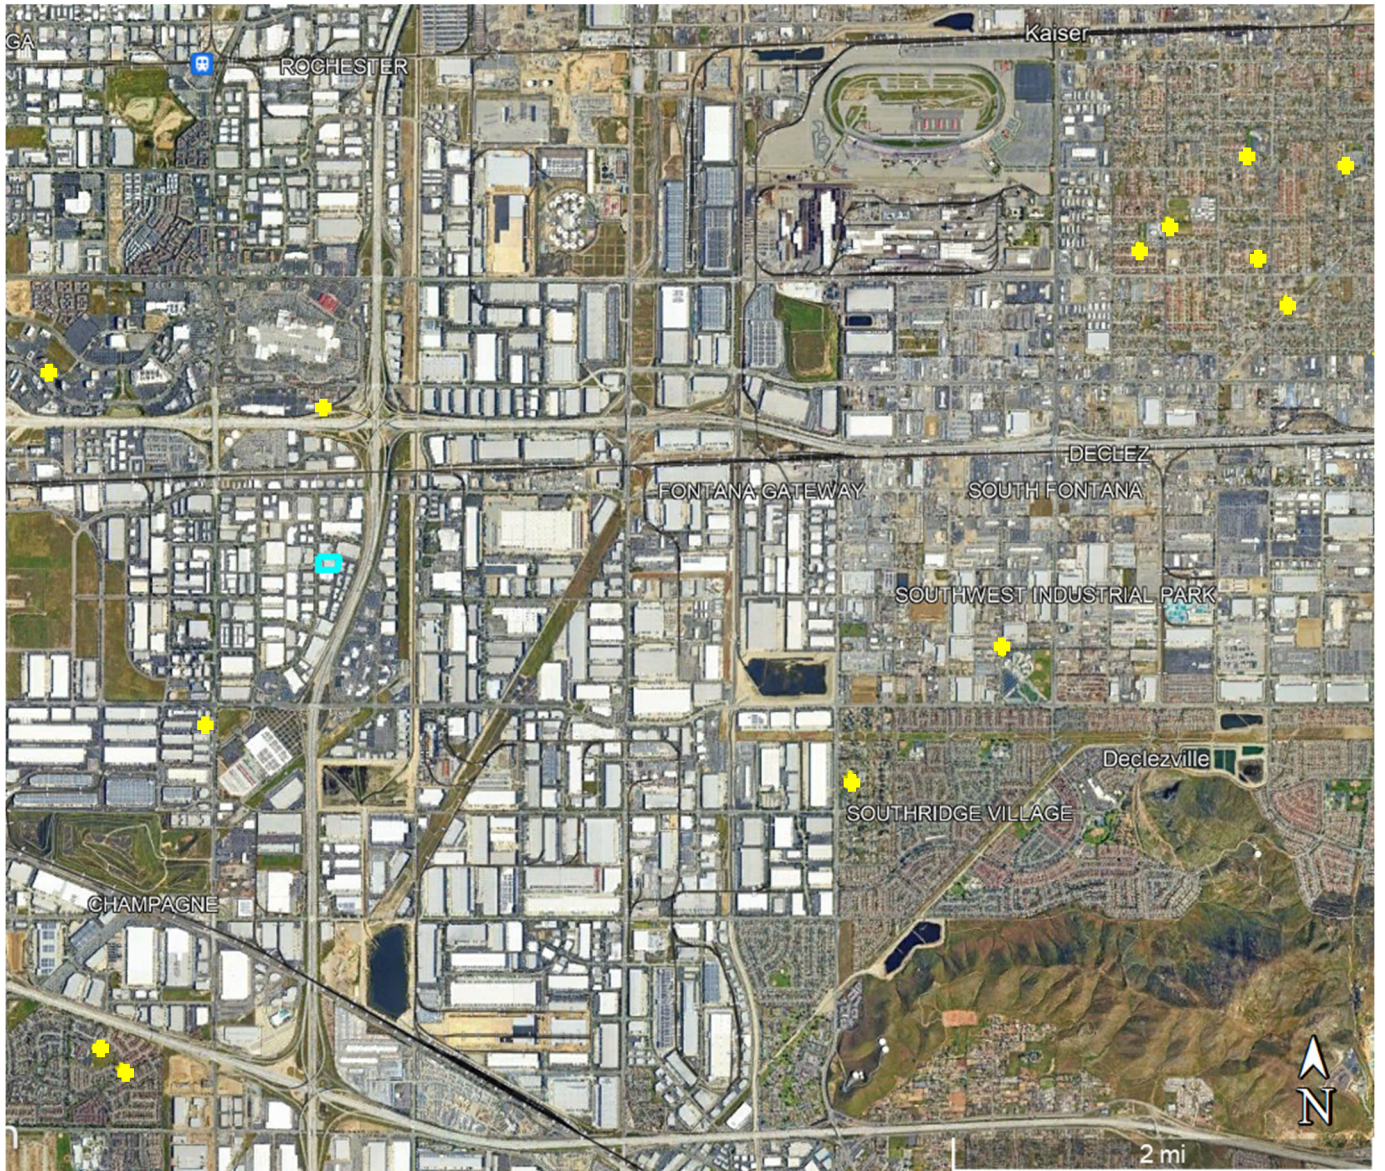
 Facility Boundary

Figure 08:


**Locations of PMI, MEIR, MEIW and MEISR
for Acute Hazard Index**



- Facility Boundary
- Sensitive Receptors

Figure 09:

**Sensitive Receptors with
Cancer Risk > One Chance in-one-Million**

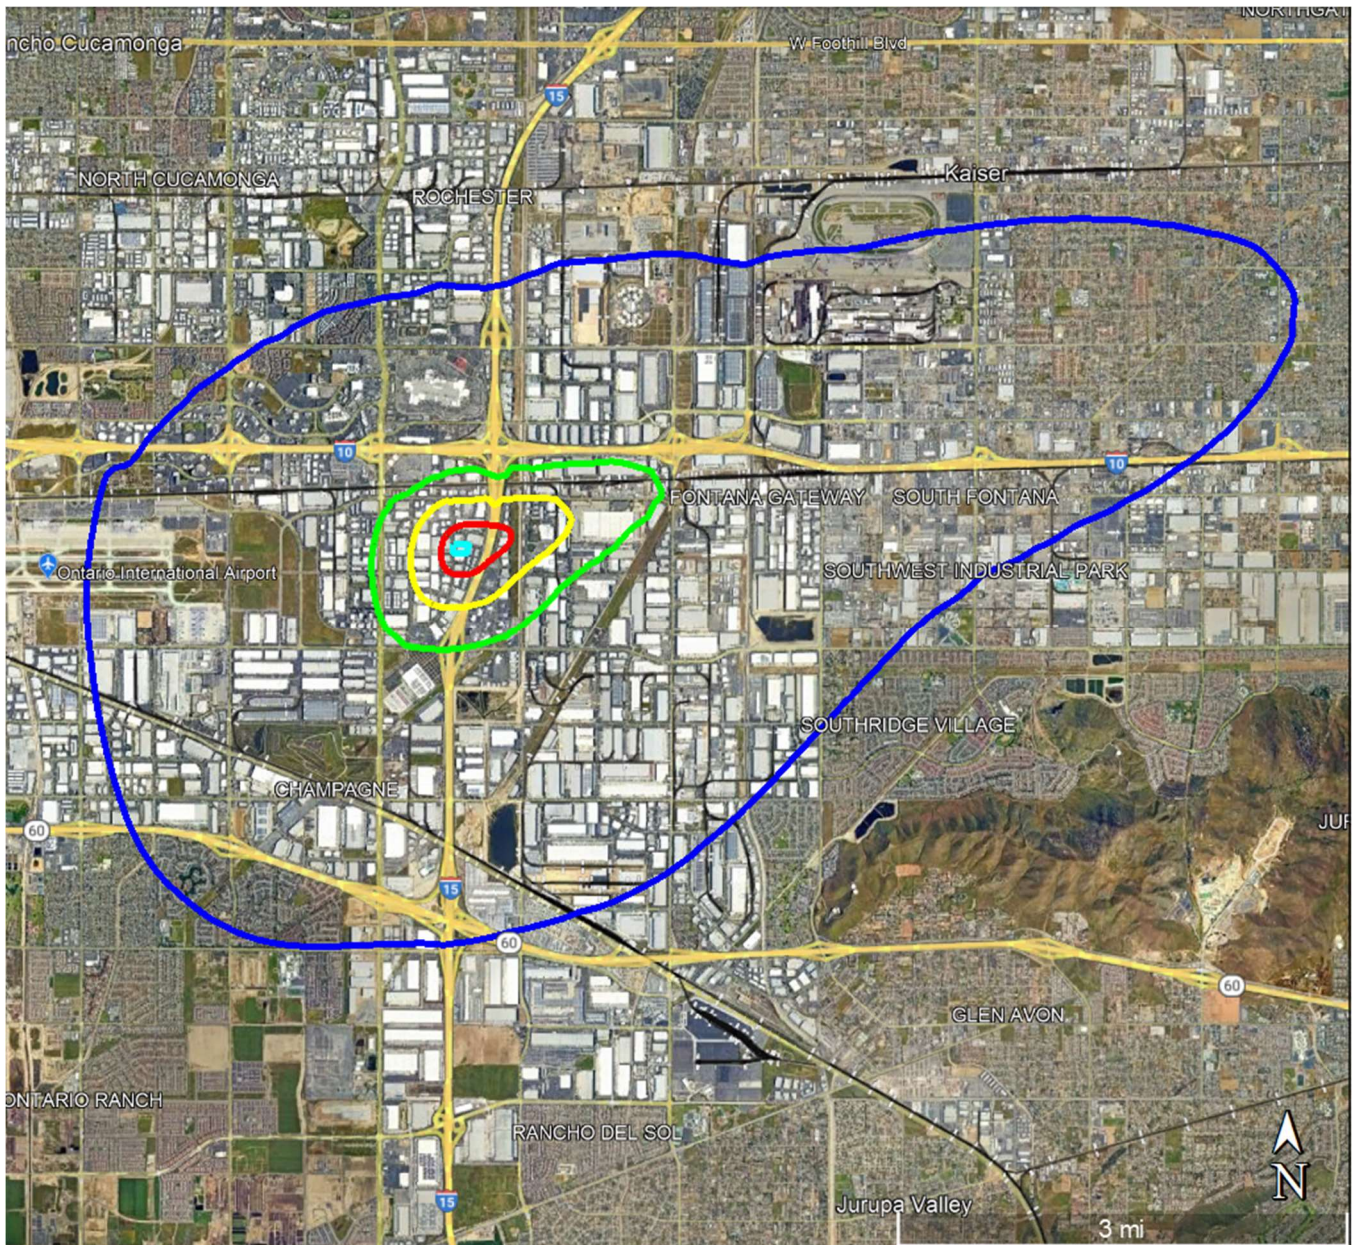

- Facility Boundary
- 1 chance in-one-million Cancer Risk
- 10 chances in-one-million Cancer Risk
- 25 chances in-one-million Cancer Risk
- 100 chances in-one-million Cancer Risk

Figure 10:
Residential Cancer Isopleths
(30-Year Exposure)


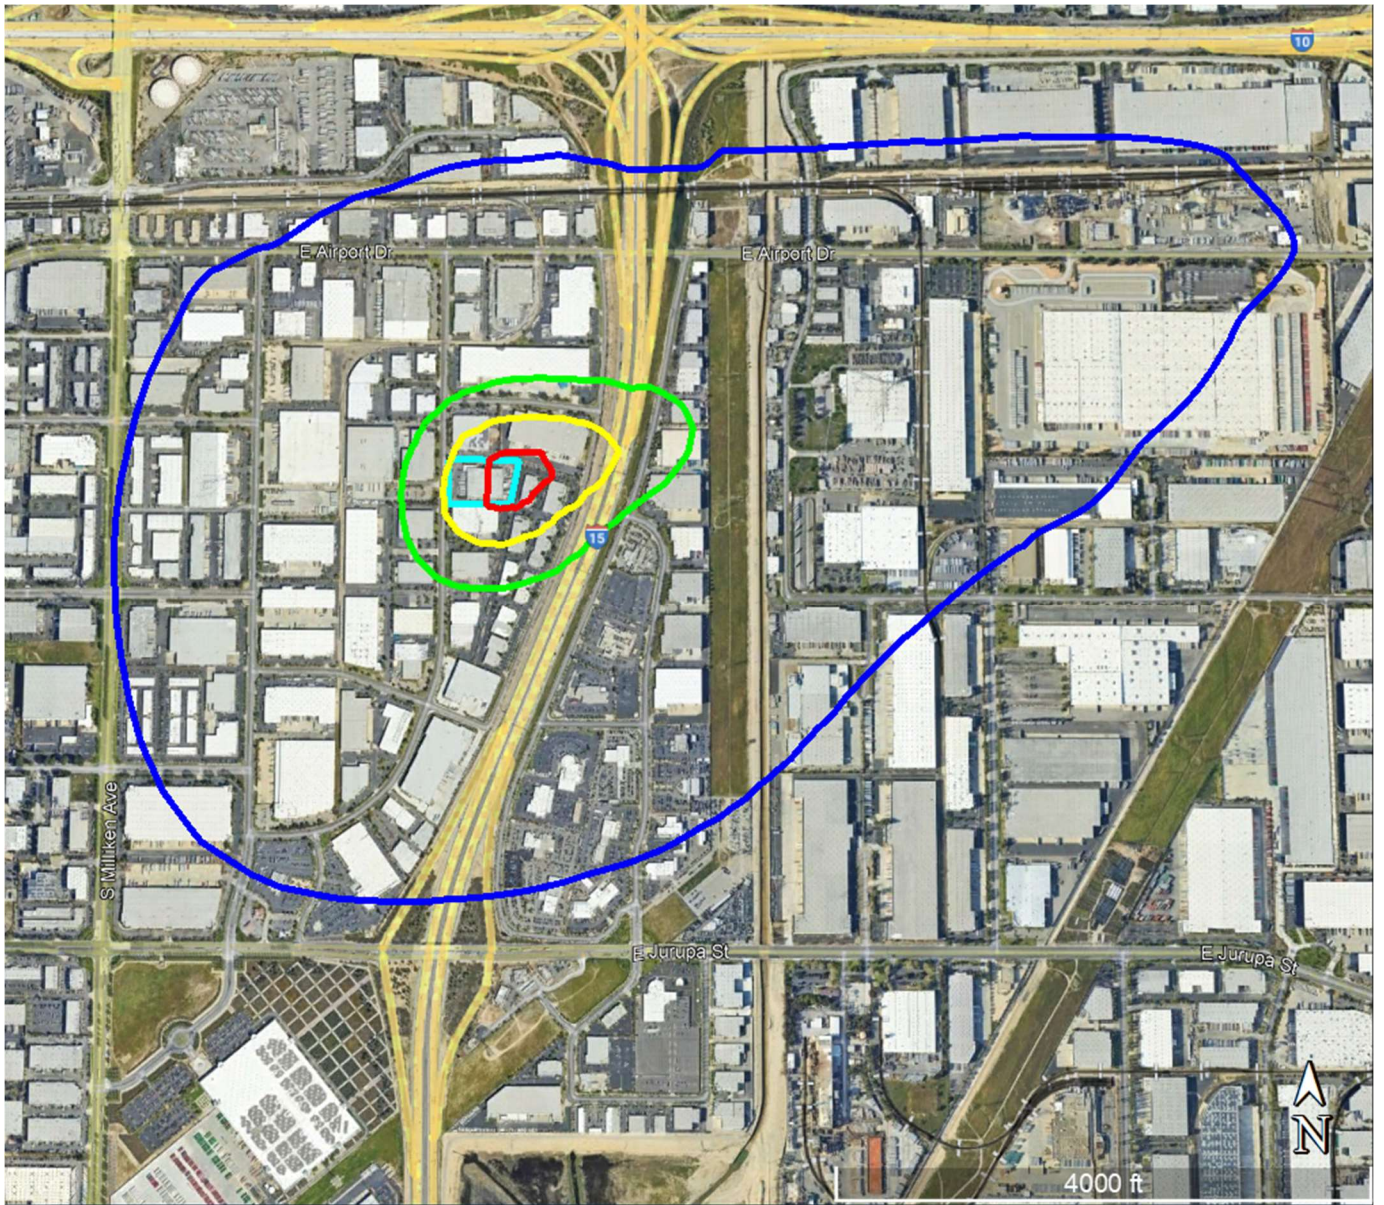


Figure 12:

- ▬ Facility Boundary
- ▬ 1 chance in-one-million Cancer Risk
- ▬ 10 chances in-one-million Cancer Risk
- ▬ 25 chances in-one-million Cancer Risk
- ▬ 100 chances in-one-million Cancer Risk

**Worker Cancer Isopleths
(25-Year Exposure)**



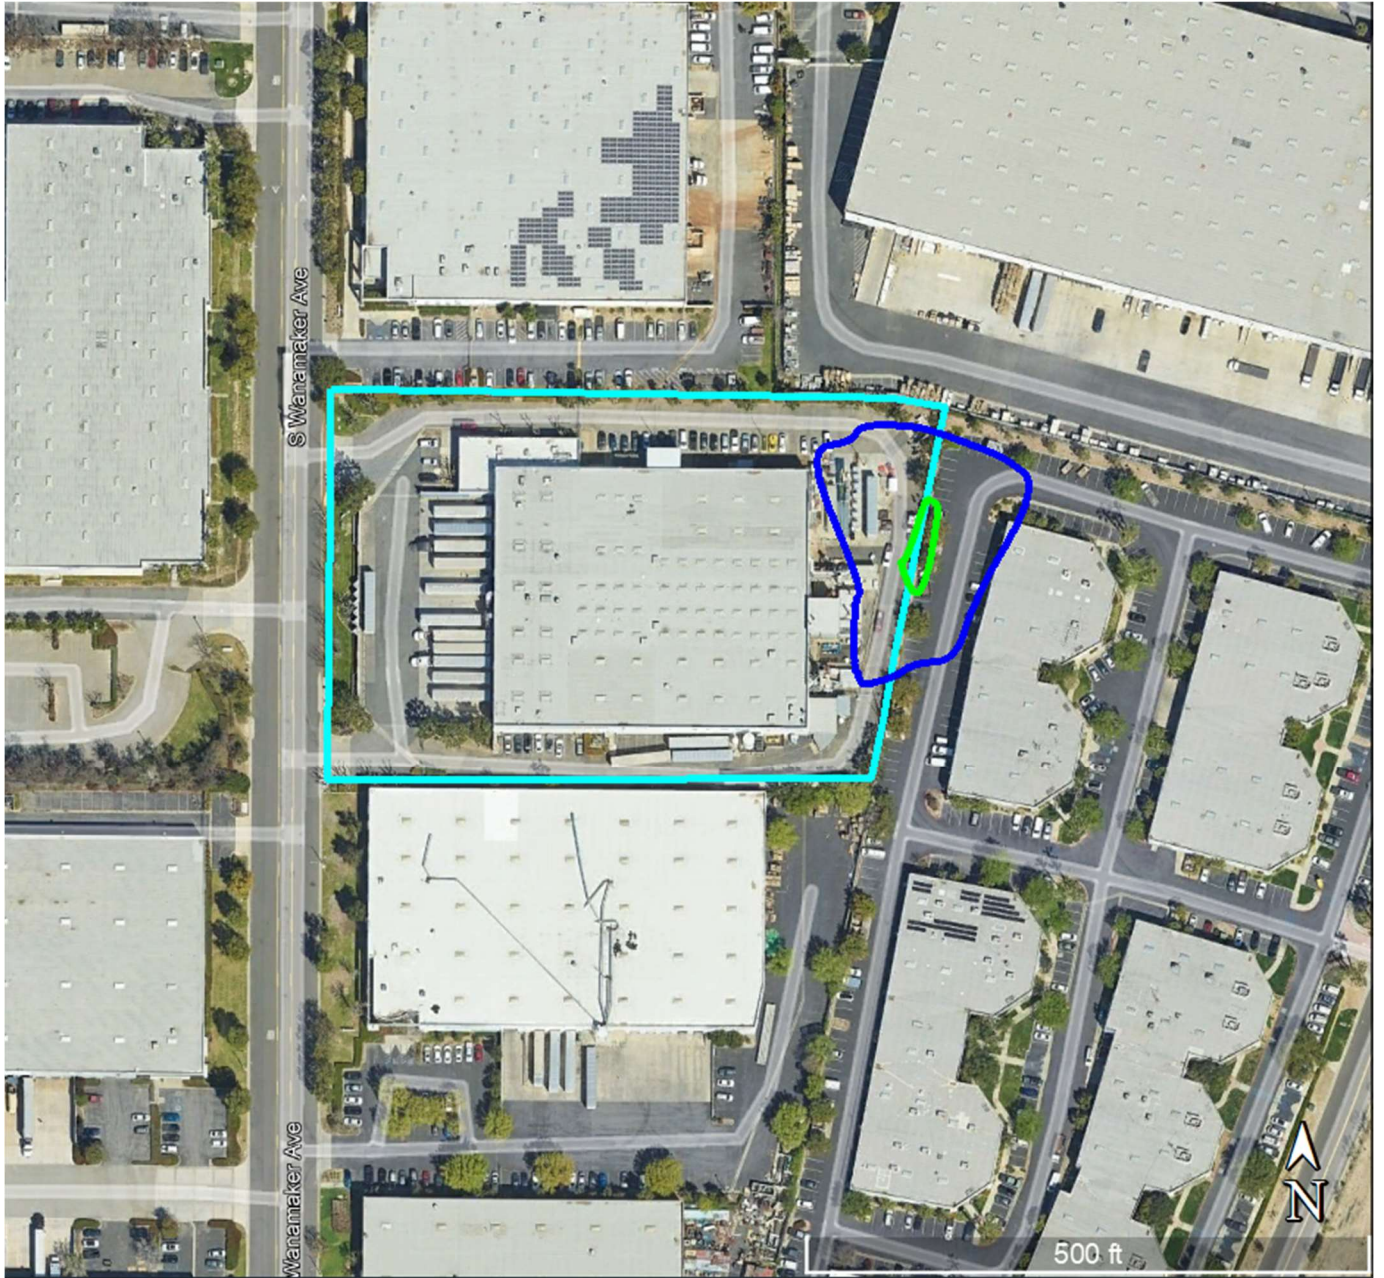

-  Facility Boundary
-  Hazard Index of 0.5

Figure 13:
Chronic Risk Isopleth

APPENDIX A
AERMOD MODELING FILES
[PROVIDED ELECTRONICALLY]

APPENDIX B
HARP FILES
[PROVIDED ELECTRONICALLY]